



Shenzhen Silicon Technology Co., Ltd.
SHENZHEN SILICONTRA TECHNOLOGY CO.,LTD.



PAN3029ZTR4-GC

433MHz Wireless Transceiver Module User Specification (V1.0)


Table of contents

1. Module Introduction-----	3
1.1 Module Overview-----	3
1.2 Module Features-----	3
1.3 Application Scenarios-----	4
2 Module Parameters-----	4
2.1 Basic Module Electrical Parameters-----	4
3 Module Description-----	5
3.1 Module Dimensions-----	5
3.2 Module Pin Function Definition-----	5
3.3 Pin Function Description-----	6
3.4 Module Connection Diagram-----	7
4 Additional Notes-----	7
5 Antenna Selection-----	7
5.1 Antenna Use Precautions-----	7
6 Hardware Design-----	8
7 Unsatisfactory Transmission Distance-----	9
8 Modules are Easily Damaged-----	9
9 Bit Error Rate is Too High-----	9

Document Revision History

Version	Change Date	Change Description
V1.0	August 5, 2024	Initial release

1. Module Introduction

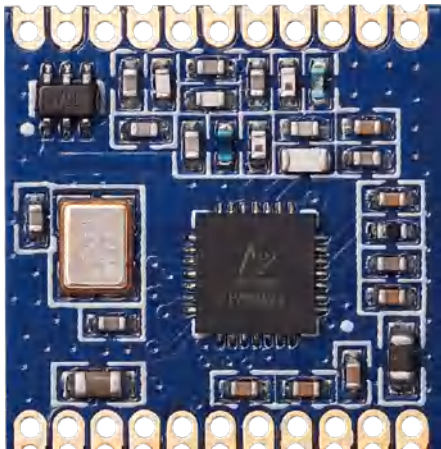

(Front view of module)



(Rear view of module)

(The module is subject to the actual product)

1.1 Module Overview

PAN3029ZTR4-GC is a module independently developed and designed by our company based on the RF chip PAN3029 of Panqi Micro, a domestic original manufacturer in my country.

The biggest highlight of the PAN3029ZTR4-GC module is that the transmission power reaches +20dBm and the receiving sensitivity reaches -143dbm. Coupled with its advanced ChirpLoTTM modulation and demodulation technology, the communication distance has been greatly improved. It has a very strong position in some short-distance IoT wireless communication fields.

The PAN3029ZTR4-GC module has the characteristics of small size, low power consumption, long transmission distance, and strong anti-interference ability. It can be widely used in various wireless communication fields of the Internet of Things.

1.2 Module Features

- 433MHz frequency band, strong penetration
- Maximum transmit power 20dBm, power software adjustable, receiving current 4.1mA@DCDC mode
- SPI communication interface, can be directly connected to various microcontrollers with wide voltage working range 1.8~3.6V
- Industrial standard design, support long-term use at -40 ~ +85°C Ultra-small size, only 15x15mm
- Stamp hole design, convenient for mass production

1.3 Application Scenarios

- Home security alarm
- Healthcare
- Smart home
- Building automatic meter reading system
- Smart parking system
- Automotive industry application
- Agricultural automation solution
- Wireless industrial remote control, industrial sensor and other products


2 Module Parameters

2.1 Basic Module Electrical Parameters


Project	Specifications		Description
Parameters	Performance		Remark
Operating voltage	1.8 ~ 3.6V		Typical 3.3V
Operating temperature	-40 ~ 85°C		
Operating frequency	408 ~ 550MHz		Recommended 433MHz, software configurable
Power consumption	Transmit	96mA@20dBm	At maximum transmit power
	Receive	8mA@LDO / 4.1mA@DC-DC	
	Sleep	260nA	
Transmit power	20dBm		Maximum value, user programmable
Receive sensitivity	-143dBm		@62.5KHz
Modulation type	ChirpIoT™		
Modulation parameters	BW?62.5KHZ~500KHZ?SF?5~12?CR?4/5?4/6?4/7?4/8		
Connection	Stamp Holes		
Communication interface	SPI		
Dimensions	15*15mm		
Antenna type	Stamp hole external antenna		Equivalent impedance about 50Ω

3 Module Description

3.1 Module Dimensions

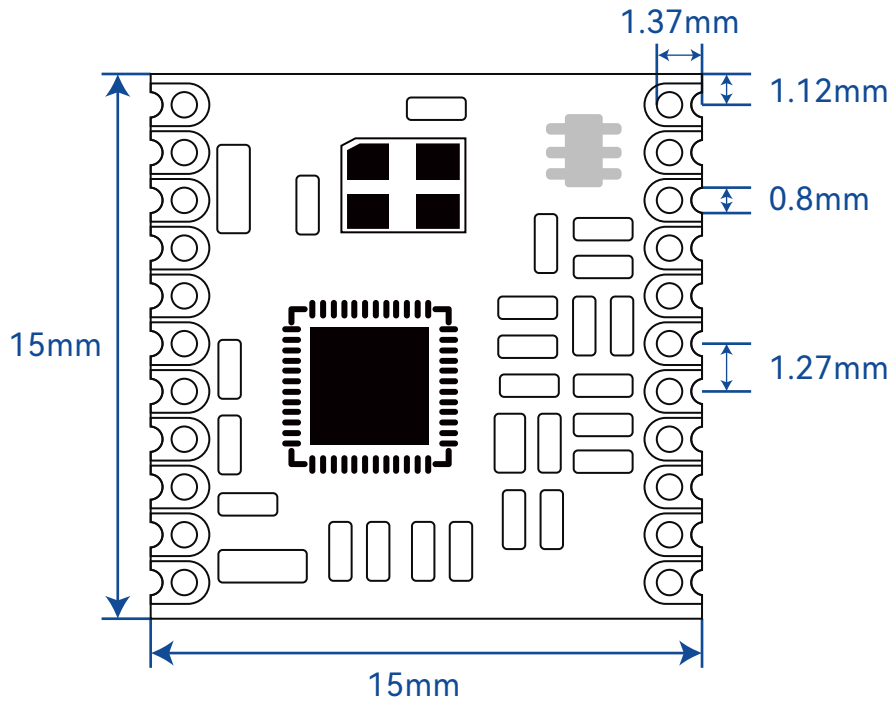


3.2 Module Pin Function Definition

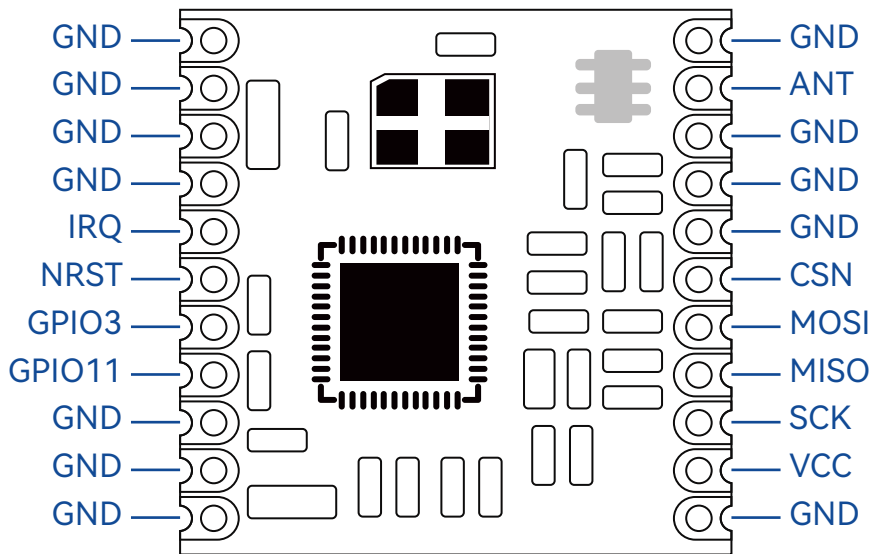

3.3 Pin Function Description

Number	Name	Function description
1	GND	Ground
2	GND	Ground
3	GND	Ground
4	GND	Ground
5	IRQ	Interrupt signal
6	NRST	Reset
7	GPIO3	Digital IO
8	GPIO11	Digital IO or channel status indication signal
9	GND	Ground
10	GND	Ground
11	GND	Ground
12	GND	Ground
13	VCC	Module power pin, standard supply voltage 3.3V
14	SCK	SPI bus clock pin, normally high level
15	MISO	SPI bus slave data output pin.
16	MOSI	SPI bus slave data input pin.
17	CSN	SPI chip select pin, low level is active
18	GND	Ground
19	GND	Ground
20	GND	Ground
21	ANT	Antenna interface, equivalent impedance is about 50 Ohm
22	GND	Ground

3.4 Module Connection Diagram

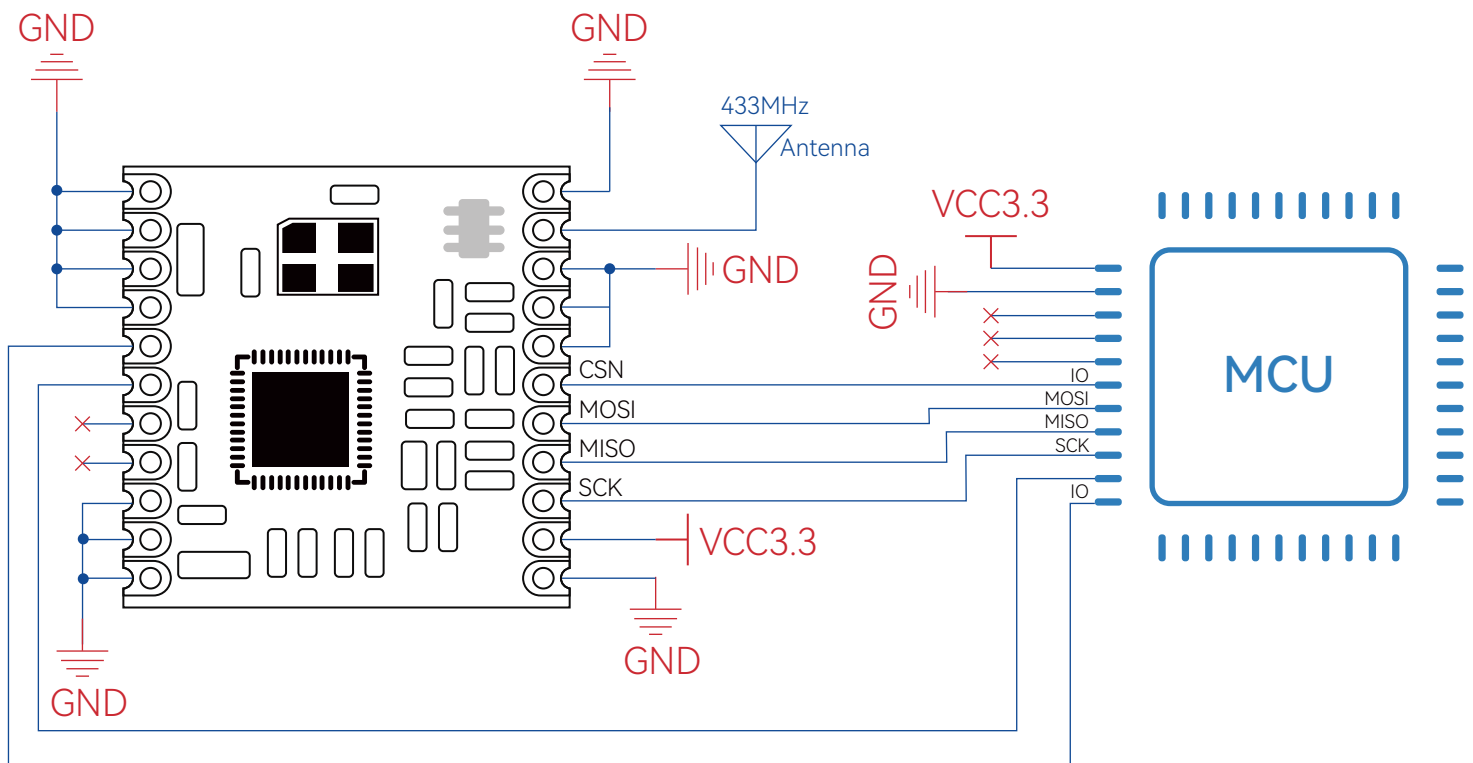

4 Additional Notes

1. It is recommended to use a linear regulated power supply (LDO) to power the module. The power ripple coefficient should be as small as possible. The module needs to be reliably grounded. Please pay attention to the correct connection of the positive and negative poles of the power supply. Reverse connection may cause permanent damage to the module.
2. No other metal objects should be placed near the module antenna, otherwise it will seriously affect the communication distance.


5 Antenna Selection

5.1 Antenna Use Precautions

- The antenna installation structure has a great impact on the performance of the module. For better results, the antenna needs to be exposed, preferably vertically upward. When the module is installed inside the housing, you can use a high-quality antenna extension cable to extend the antenna to the outside of the housing; if the product is not allowed to be exposed, you need to match the spring antenna or FPC antenna.
- If the antenna is installed inside the metal shell, the transmission distance will be greatly reduced.
- If you choose a suction cup antenna, straighten the lead as much as possible and attach the suction cup base to the metal object as much as possible.



433MHz spring antenna



433MHz FPC antenna



433MHz Rod antenna



433MHz suction cup antenna

6 Hardware Design

- It is recommended to use a DC regulated power supply to power the module. The power supply ripple coefficient should be as small as possible, and the module needs to be reliably grounded.
- Please pay attention to the correct connection of the positive and negative poles of the power supply. Reverse connection may cause permanent damage to the module.
- Please check the power supply to ensure that it is within the recommended power supply voltage. If it exceeds the maximum value, it will cause permanent damage to the module.
- Please check the stability of the power supply. The voltage cannot fluctuate greatly and frequently.
- When designing the power supply circuit for the module, it is often recommended to retain more than 30% margin, which is conducive to the long-term stable operation of the whole machine.
- The module should be kept as far away as possible from parts with large electromagnetic interference such as power supply, transformer, and high-frequency wiring.
- High-frequency digital wiring, high-frequency analog wiring, and power wiring must avoid the bottom of the module. If it is necessary to pass under the module, assuming that the module is soldered on the Top Layer, the ground copper is laid on the Top Layer of the contact part of the module (all copper is laid and well grounded), and it must be close to the digital part of the module and routed on the Bottom Layer.
- Assuming that the module is soldered or placed on the Top Layer, it is also wrong to randomly route on the Bottom Layer or other layers, which will affect the module's spurious and receiving sensitivity to varying degrees.
- If there are devices with large electromagnetic interference around the module, it will also greatly affect the performance of the module. According to the intensity of the interference, it is recommended to stay away from the module appropriately. If the situation permits, appropriate isolation and shielding can be performed.
- If there are traces with large electromagnetic interference around the module (high-frequency digital, high-frequency analog, power traces), it will also greatly affect the performance of the module. According to the intensity of the interference, it is recommended to stay away from the module appropriately. If the situation permits, appropriate isolation and shielding can be performed.

7 Unsatisfactory Transmission Distance

- When there are obstacles or obstructions in straight-line communication, the communication distance will be attenuated accordingly.
- Temperature, humidity, and co-channel interference will increase the communication packet loss rate.
- The ground absorbs and reflects radio waves, and the test effect is poor near the ground.
- There are metal objects near the antenna, or it is placed in a metal shell, the signal attenuation will be very serious. The air rate is set too high (the higher the air rate, the closer the distance).
- The power supply voltage at room temperature is lower than the recommended value. The lower the voltage, the lower the power.
- The antenna is poorly matched with the module or the antenna itself has quality problems.

8 Modules are Easily Damaged

- Please check the power supply to ensure that it is within the recommended power supply voltage. If it exceeds the maximum value, the module will be permanently damaged.
- Please check the stability of the power supply. The voltage cannot fluctuate.
- Please ensure anti-static operation during installation and use. High-frequency components are electrostatically sensitive.
- Please ensure that the humidity during installation and use is not too high. Some components are humidity-sensitive devices.
- If there is no special requirement for the product, it is not recommended to use it at too high or too low temperature.

9 Bit Error Rate is Too High

- If there is interference from the same frequency signal nearby, stay away from the interference source or change the frequency or channel to avoid interference.
- An unsatisfactory power supply may also cause garbled code. Be sure to ensure the reliability of the power supply.
- If the extension line or feeder is of poor quality or too long, it will also cause a high bit error rate.