


Name: _____

Date: _____

Mr. Rawson • Y8 MYP Design



1.1 – Introduction to MakeCode

Unit 1: Robotics & Control

1. **Open.** `makecode.microbit.org` → **New Project** → name it name-badge.
2. **First letter.** `show leds` inside `on start`. Click the squares.
3. **Download.** USB in → purple **Download**. If a file lands, drag it onto the **MICROBIT** drive.

Stop here until your board shows the letter.

4. **Your name.** One `show leds` per letter. `pause (ms) 500` after each.
5. **Cycle it.** Wrap everything in `repeat 4 times`.
6. **Add an input.** Put it all inside `on button A pressed` instead of `on start`.

button = **input** loop = **process** LEDs = **output**


7. **Publish. Share** → **Publish project** → copy the link. You submit this link for homework.

My sharing link: _____

Stuck?

- **Board blank?** Cable in at both ends. Redo step 3.
- **Letters flash past?** Bigger pause. $1000 = 1$ second.
- **Letter won't fit?** The grid is 5×5 . E, L, T, I are easiest.
- **Old program gone?** The board holds one at a time. Normal.
- **Lost your link?** **Share** → **Publish** again.

The finished program

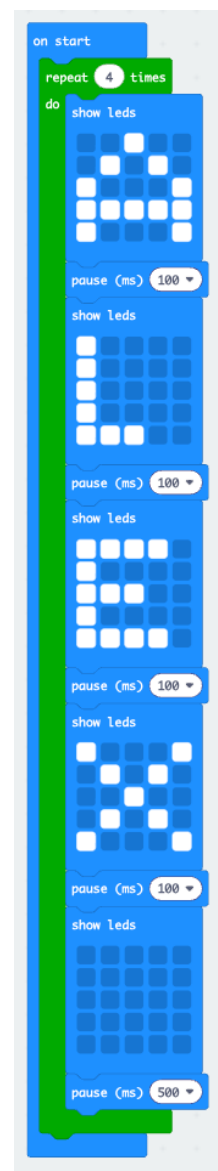

A four-letter name,
cycled four times.

Extension

Make `on button B pressed` do something different. Shrink the pauses until your name is unreadable — where is the limit? Try `show string`. What is it doing for you?