



DEPARTMENT OF INDUSTRIAL ENGINEERING & MANAGEMENT

Date : 05/05/2025	CIE - II	Max. Marks : 10 + 50
Semester : IV	UG	Duration : 30 + 90 Min
Course Title: STATISTICS FOR DATA ANALYTICS		Course Code : IM241AT

Note:

1. Answer all the Questions.

Sl. No	Questions	M	BT	CO
Part - A				
1.	$S_{XX} = 53$, $S_{XY} = 48$, and $S_{YY} = 84$ in a regression analysis. Then SS_{Error} is given by _____	01	L1	CO3
2.	When a set of points are used to fit a 2 nd degree curve, _____ regression is said to be performed.	01	L1	CO3
3.	The 90% percent point of a χ^2 variable with 9 degrees of freedom is _____	02	L3	CO3
4.	In linear regression the error term is distributed as _____ distribution (include its parameters also).	02	L2	CO4
5.	When can you be confident that the regression relation is a proper one and can be used for prediction?	02	L2	CO4
6.	The test statistic in a test for population variance based on a given sample of size n is _____ (also state what the terms are).	01	L2	CO4
7.	Type I error is committed when a _____ hypothesis is _____.	01	L2	CO4

Part - B				
1	The summarized data on 10 observations are given below.	12	L3	CO3
a	- Estimate β_1 and β_0 assuming positive correlation between X and Y. - Obtain an estimate of the underlying variance. - What is the proportion of variability explained by the regression model? - Assuming normal distribution of the errors, how will a residual plot of errors vs predicted values appear in this case? (Show an indicative plot). $\sum_i (y_i - \hat{y}_i)^2 = 3.267, \quad \sum_i y_i = 63.3, \quad \sum_i y_i^2 = 423.49, \quad \sum_i x_i = 139, \quad \sum_i x_i^2 = 2239$			
2.	In an oil refinery, chemical reactions are observed for a set of 20 pairs of values (x_i, y_i), and the relevant quantities are derived as: $\sum x_i^2 = 130000$, $\sum y_i^2 = 88.6$, $\sum x_i y_i = 1500$, $\sum x_i = 1500$, $\sum y_i = 10$ - Compute the intercept and slope parameters and write the estimated linear regression model relating x and y. - Compute the predicted value y for an input x = 85, and find the corresponding residual if the observed value is 0.8 - Estimate the error variance and the proportion of variability <u>not</u> explained by the model.	10	L3	CO3



RV College of Engineering
Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India



Bengaluru - 560059, Karnataka, India

3.

During the fall harvest season, pumpkins are sold in large quantities. Often, instead of weighing the pumpkins prior to sale, the operator will just place the pumpkin in the appropriate circular cutout on the counter. When asked why this was done, one farmer replied, I can tell the weight of the pumpkin from its circumference. To determine whether this was really true, a sample of 23 pumpkins were measured for circumference and weighed and the data is provided below

Circumference (cm)	Weight (gms)	Circumference (cm)	Weight (gms)	Circumference (cm)	Weight (gms)
50	1200	57	2000	47	1400
55	2000	66	2500	51	1500
54	1500	82	4600	63	2500
52	1700	83	4600	33	500
37	500	70	3100	43	1000
52	1000	34	600	50	1500
53	1500	51	1500	49	1600
60	2300	59	2100		

- Assuming a linear relationship, use the least-squares method to compute the regression coefficients b_0 and b_1 .
- Interpret the meaning of the slope, b_1 , in this problem.
- Predict the mean weight for a pumpkin that is 60 centimeters in circumference.
- Do you think it is a good idea for the farmer to sell pumpkins by circumference instead of weight? Explain.

4.

10 values denoting the number of failed specimens per day in a load test, collected at random on 10 different days are: 100, 115, 150, 170, 90, 135, 180, 110, 150, 155. Assuming that the failed specimens follow normal distribution approximately, test if the mean number of failed specimens is at most 120, at 10% significance

5

What are the ways in which linear regression techniques are misused?

14

L3

CO4

10

L4

CO4

04

L2

CO3



RV College of Engineering®
Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India

DEPARTMENT OF MECHANICAL ENGINEERING		
Date: 06 th May-2025	CIE - 2	Max. Marks:10+50
Semester:4	UG	Duration: 2 Hrs
Course Title: MATERIALS SCIENCE FOR ENGINEERS	Course Code:ME242TB	

S. No	PART A	M	BT	CO
1	The stress at which a material begins to deform plastically is called the _____.	1	1	2
2	Piezoelectric materials generate an electric charge in response to applied _____.	1	1	2
3	_____ deformation is fully recoverable when the load is removed.	1	1	2
4	Define optoelectronics with an example.	2	2	2
5	The property of a material that enables it to absorb energy and plastically deform without fracturing is called _____.	1	1	2
6	In which type of semiconductors the electrical behavior is dominated by impurities	1	1	2
7	_____ are materials used in joint replacements due to their compatibility with biological tissues.	1	1	2
8	Cement and concrete are widely used _____ materials in construction.	1	1	2
9	Fiber-reinforced composites are formed by embedding fibers in a _____ matrix.	1	1	2
PART B				
1.	Explain the working principle of ferroelectricity and piezoelectricity with suitable examples, list their applications	10	3	2
2.	Describe how superconductors and optical fibres work and list their practical applications.	10	2	2
3.	Draw and interpret a stress-strain curve for a ductile material.	10	3	2
4.	Classify polymers and explain their properties with examples and applications.	10	2	2
5.	Write short notes on the following materials: write the composition, grades / types and applications i. Copper Alloys ii. Cement iii. Glass	10	2	2

Marks Distribution	CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	00	60	00	00	08	32	20	00	00	00

DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT

Date : 5 th May 2025	CIE – II	Max. Marks : 10 + 50
Semester : IV	UG	Duration : 30 + 90 Min
Course Title: CAD/CAM & ROBOTICS		Course Code : IM343AI

Note:

1. Answer all the Questions.

Sl. No	Questions	M	BT	CO
Part – A				
1.	What is rendering in computer graphics?	2	1	1
2.	Why is the complexity of Bresenham's line drawing algorithm less than that of DDA line drawing algorithm?	2	2	1
3.	List any two features of fixed automation	2	1	1
4.	What is the difference between Mechanization and Automation?	2	2	3
5.	List two common reasons for adopting Automation.	2	2	3
Part – B				
1	Express a line from (5, 5) to (13, 9) on a raster screen using Bresenham's Line Drawing Algorithm. Show the result in a Cartesian graph.	10	3	1
2	What is scan conversion in computer graphics? Explain how lines and polygons are scan converted.	10	2	1
3	After automation in a packaging unit, several workers lost their jobs. There's rising concern about unemployment and skill mismatch. Discuss the social challenges caused by automation. Suggest how these issues can be mitigated.	10	3	3
4	A beverage bottling plant uses high-speed equipment that fills, caps, and labels bottles on a continuous production line. The system is dedicated to a single type of bottle and product. Identify and explain the type of automation used in this plant. Discuss its advantages and limitations in high-volume production.	10	3	3
5	A manufacturing plant wants to implement automation in stages to minimize disruption and investment risk. Outline different strategies for automation and explain which would best suit a gradual transition.	10	2	3

DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT

Date : 06/05/2025	CIE – II-A	Max. Marks : 10 + 50
Semester : IV	UG	Duration : 30 + 90 Min
Course Title: OPERATIONS RESEARCH		Course Code : IM244AI

Note:

1. Answer all the Questions.

Sl. No	Questions	M	BT	CO
--------	-----------	---	----	----

Part – A

1.	A transportation problem is said to be _____ if total supply is equal to total demand.	1	1	2
2.	In the transportation problem, the _____ method is used to find an initial basic feasible solution based on the lowest cost.	1	2	2
3.	The _____ gives a better initial basic feasible solution compared to other methods.	1	1	2
4.	If the number of allocations in a basic feasible solution is less than $m + n - 1$, the solution is said to be _____.	1	2	2
5.	The _____ method is used to check the optimality of a transportation solution.	1	2	2
6.	The assignment problem can be viewed as a special case of the _____ problem.	1	1	2
7.	The _____ method ensures that only one task is assigned to one person.	1	1	2
8.	Variants of the assignment problem include _____ assignment and multiple assignment problems.	1	2	2
9.	The _____ problem is NP-hard and cannot be solved by the Hungarian method directly.	1	2	2
10.	_____ tools like Excel Solver or Python libraries can be used to demonstrate assignment and transportation problems.	1	2	2

Part – B

1	Explain the formulation and general structure of a transportation problem with a suitable example.	10	2	2																														
2	With reference to a transportation problem define the following terms: (i) Feasible solution (ii) Basic feasible solution (iii) Optimal solution (iv) Non-degenerate basic feasible solution	10	2	2																														
3	A solicitors' firm employs typists on hourly piece-rate basis for their daily work. There are five typists and their charges and speed are different. According to an earlier understanding only one job was given to one typist and the typist was paid for a full hour, even if he worked for a fraction of an hour. Find the least cost allocation for the following data: <table border="1" data-bbox="239 1574 1117 1872"> <thead> <tr> <th>Typist</th><th>Rate per hour</th><th>No. of Pages</th><th>Job</th><th>No. of Pages (Rs) Typed/Hour</th></tr> </thead> <tbody> <tr> <td>A</td><td>5</td><td>12</td><td>P</td><td>199</td></tr> <tr> <td>B</td><td>6</td><td>14</td><td>Q</td><td>175</td></tr> <tr> <td>C</td><td>3</td><td>8</td><td>R</td><td>145</td></tr> <tr> <td>D</td><td>4</td><td>10</td><td>S</td><td>298</td></tr> <tr> <td>E</td><td>4</td><td>11</td><td>T</td><td>178</td></tr> </tbody> </table>	Typist	Rate per hour	No. of Pages	Job	No. of Pages (Rs) Typed/Hour	A	5	12	P	199	B	6	14	Q	175	C	3	8	R	145	D	4	10	S	298	E	4	11	T	178	15	3	2
Typist	Rate per hour	No. of Pages	Job	No. of Pages (Rs) Typed/Hour																														
A	5	12	P	199																														
B	6	14	Q	175																														
C	3	8	R	145																														
D	4	10	S	298																														
E	4	11	T	178																														



RV College of Engineering

Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India

4	A factory manager is considering the most economical schedule to transport cement from his three manufacturing centers 1, 2 and 3 to deposit I, II, III, IV and V. The weekly production and demand along with the transportation cost per ton (Rs.) are given below: <table><tr><th></th><th></th><th colspan="5">To</th><th rowspan="2">Supply</th></tr><tr><th></th><th></th><th>I</th><th>II</th><th>III</th><th>IV</th><th>V</th></tr><tr><td rowspan="3">From</td><td>1</td><td>4</td><td>1</td><td>3</td><td>4</td><td>4</td><td>60</td></tr><tr><td>2</td><td>2</td><td>3</td><td>2</td><td>2</td><td>3</td><td>35</td></tr><tr><td>3</td><td>3</td><td>3</td><td>2</td><td>4</td><td>4</td><td>40</td></tr><tr><td colspan="2">Demand</td><td>22</td><td>45</td><td>20</td><td>18</td><td>30</td><td></td></tr></table> What should be the distribution schedule?			To					Supply			I	II	III	IV	V	From	1	4	1	3	4	4	60	2	2	3	2	2	3	35	3	3	3	2	4	4	40	Demand		22	45	20	18	30		10	3	2
		To					Supply																																										
		I	II	III	IV	V																																											
From	1	4	1	3	4	4	60																																										
	2	2	3	2	2	3	35																																										
	3	3	3	2	4	4	40																																										
Demand		22	45	20	18	30																																											
5	Describe variants of the assignment problem.	05	2	2																																													



DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT

Date : 07.05.2025	CIE – II	Max. Marks : 10 + 50
Semester : IV	UG	Duration : 30 + 90 Min
Course Title: Marketing Management		Course Code : IM345AT

Note:

1. Answer all the Questions.

Sl. No	Questions	M	BT	CO
Part – A				
1	Why is keyword research important in SEO?	2	L2	01
2	Differentiate between On-site SEO and Off-site SEO.	2	L2	01
3	What is the purpose of optimizing organic search rankings in SEO?	2	L2	01
4	Name any two popular web analytics tools other than Google Analytics.	2	L1	02
5	What is the main purpose of using Google Analytics?	2	L1	02
Part – B				
1	Explain the importance of social media marketing for businesses today. How can businesses integrate social media platforms into their overall marketing strategy?	10	L2	03
2	Compare the roles of Facebook, Instagram, LinkedIn, and Twitter in social media marketing. How should a business choose the right platform?	10	L3	03
3	Analyse the differences between on-site and off-site SEO techniques. Provide examples for each.	10	L3	03
4	Explain the role of web analytics in digital marketing. How can businesses benefit from analysing website data?	10	L2	02
5	Develop a basic strategy to set up Google Analytics for a new e-commerce website. What key metrics should be tracked?	10	L4	04



**RV College of
Engineering**

Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India
+91-080-68188100 | www.rvce.edu.in

*Go, change the world**

**DEPARTMENT OF
BIOTECHNOLOGY**
Academic year 2024-2025 (Even Sem)

Academic year 2024-2025				
	Finally, wheat products make their way to your table. These products are essential to many holidays and celebrations and go through a safe process to get to you. Whenever you purchase breads, buns, pizza, rotis think of a wheat farmer and all of those in between.			
1	Identify and elaborate on the type of hazard in each step of the wheat processing.	7	1	3
2	Mention and justify the elimination method for identified hazard during the wheat processing	6	2	3
3	How we can implement the HACCP for the wheat processing.	7	2	3
4	Illustrate on various Techniques that take place in a food testing laboratory	10	3	3
5	Elaborate on food borne diseases and food allergens	10	3	4
6	Justify GMP and GLP in food processing.	10	4	3

BT-L-Blooms Taxonomy, CO-Course Outcomes, M-Marks

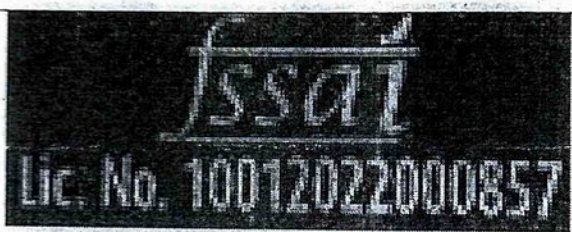
Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	---	--	46	14	7	23	20	10	---	--



DEPARTMENT OF
BIOTECHNOLOGY
Academic year 2024-2025 (Even Sem)

Date	May 6 th 2025.	Maximum Marks	60
Course Code	BT242TC	Duration	120 min
Sem	IV Semester	Closed Book Offline Test-2	
Bio Safety Standards and Ethics (Basket course)			

Instructions: Answer all questions from Part A and Part B, Write Part A in sequence first two pages of answer booklet.

Sl. No	PART A Questions (Quiz)	M	BT-L	CO
1.	HACCP is a joint management system developed by _____ and _____	2	2	3
2	A man found a copper wire in pizza and human finger in ice cream. Mention the different types of the hazards.	2	2	3
3	Mention the 2 – hour and 4 – hour rule for food storage	2	2	3
4	 Decode the above fssai license number of campa cola.	2	2	4
5	Expand the term GAP and GHP give its importance	2	2	4

Sl. No	PART B Questions (Test)	M	BT-L	CO
	In the wheat processing from farm to customer, the following steps are involved. (ANSWER Q1, Q2, Q3) - Farmers spend time planting seeds, checking for disease and monitoring plant health until harvest. Combines harvest the wheat kernels, which are then loaded into a semi-truck. - The harvested grain is sold at market price to a local grain elevator. The elevator can store the grain until the right market price, or it can sell it. - Country elevators sell their grain to terminal elevators, which clean, separate and maintain the value of the grain. The grain is then sold to flour millers for domestic consumption, or it is loaded into ships bound for overseas markets. - The flour mills grind the grain into different types of flour — whole wheat, all-purpose, bread flour, etc. The mills can also use the flour to make ready-to-eat products. Both the flour and wheat products are shipped to grocery stores and other food retailers. - Bakers and chefs also use flour to make a wide variety of delicacies. Consumers can either buy these products, or buy flour produced by the flour mills to make their own creations at home.			



RV College of Engineering®
Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India

Department of Civil Engineering

Date: 6.5.25	Quiz 2 and Test - 2	Max. Marks:10+50
Semester:IV	UG	Duration: 1 $\frac{1}{2}$ Hrs
Course Title: Environment and Sustainability		Course Code:CV242TA

QUIZ

S No	Questions	M	BT	CO
1.	Highlight the principle of green engineering.	2	1	2
2.	Enumerate 10% rule of Energy flow	2	1	2
3.	Hydrogen fuel cells produce electricity by combining ____ and ____ atoms.	2	1	2
4.	List two renewable and non-renewable sources of energy	2	1	1
5.	Define carbon sequestration	2	1	2

TEST

1.	Enumerate the process of energy management and energy conservation with its objectives.	10	2	2
2.	Demonstrate on "Hydrogen energy is a clean energy" write the advantages and Disadvantages of Hydrogen energy as a energy source.	10	2	2
3.	Explain (I) Biomass energy (II)Geothermal Energy	10	2	1
4.	With a neat sketch explain carbon cycle and enumerate the steps involved in the same.	10	2	2
5.	Justify how renewable energy benefit environment and save money.	10	3	4



Academic year 2024-2025 (Even Semester)

Date	7 th May 2025	Maximum Marks	25+ 5
Course Code	HS248AT	Duration	60 Min
Sem	IV Semester	CIE- II - Quiz and Test	
UNIVERSAL HUMAN VALUES			

PART - A

(5 Marks)

Sl. No		M	CO	BT
1	1. Which of the following is considered the foundation of a strong human relationship? a) Intelligence b) Trust c) Wealth d) Appearance	1	CO1	L1
2	Disrespect Arising out of a) Lack of communication b) Lack of knowledge c) Differentiation leading to Discrimination d) Lack of Wealth	1	CO2	L1
3	Care is the feeling a) of responsibility and commitment for nurturing and protection of the Body of my relative. b) of responsibility and providing facility for nurturing and protection of the Body of my relative c) of responsibility of making the other feel comfortable with respect to Body of my relative d) of showing affection to the Body of my relative	1	CO2	L1
4	Fulfilment of relationship means a) Making effort for self development , i.e. development of one's own competence b) Making effort for mutual development, i.e. development of one's own competence and being of help to the other in developing their competence c) Making effort for mutual understanding, i.e. understanding of one's own competence and being of help to the other in understanding their competence d) Making effort for mutual in acquiring prosperity	1	CO3	L1
5	With the complete understanding of respect a) we can see for every individual on the earth that we all are the same in terms of intelligent, prosperity and status. b) we can see for every individual on the earth that we all are the same in terms of Knowledge, family, society.	1	CO1	L1



Academic year 2024-2025 (Even Semester)

c) we can see for every individual on the earth that we all are the same in terms of competence, prosperity and status.			
d) we can see for every individual on the earth that we all are the same in terms of intention, program and potential.			

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	2	2	1	—	5	—	—	—	—	—

Sl. No	Part- B Questions	M	CO	BT
1	Justify the following (i) Relationship is between one Self (I1) and another Self (I2), (ii) feelings in relationship – in one Self (I1) for the other Self (I2)	2 + 3	CO1	L1
2	Distinguish between Intention and Competence with respect Trust with suitable example	5	CO3	L2
3	The complete content of respect is to be able to see that 'the other is similar to me and we are complementary'. Define complementary in this context.	5	CO1	L1
4	Disrespect arises out of differentiation leading to discrimination on the basis of body, physical facility or beliefs. illustrate With an example	5	CO2	L2
5	Illustrate the natural acceptance values in relationship with an example for each (i) Reverence (ii) Glory	5	CO3	L1

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	10	10	5	—	15	10	—	—	—	—



RV College of Engineering

Mysore Road, RV Vidyaniketan Post
Bengaluru - 560059, Karnataka, India

USN

CIE-II - 2024

Academic year 2023-2024 (EVEN Sem)

**DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT**

Date	22.07.2024	Maximum Marks	50
Course Code	IM241AT	Duration	90 Min
Sem	IV	CIE - II	
STATISTICS FOR DATA ANALYTICS			

Note:

2. Answer all the Questions.

Sl. No.	Questions	M	BT	CO
1	The phone lines to an airline reservation system are occupied 40% of the time. Assume that the events that the lines are occupied on successive calls are independent. Assume that 10 calls are placed to the airline. (a) What is the probability that for exactly three calls the lines are occupied? (b) What is the probability that for at least one call the lines are not occupied? (c) What is the expected number of calls in which the lines are all occupied	10	3	2
2	Printed circuit cards are placed in a functional test after being populated with semiconductor chips. A lot contains 140 cards, and 20 are selected without replacement for functional testing. (a) If 20 cards are defective, what is the probability that at least 1 defective card is in the sample? (b) If 5 cards are defective, what is the probability that at least 1 defective card appears in the sample?	10	3	2
3	The fill volume of an automated filling machine used for filling cans of carbonated beverage is normally distributed with a mean of 12.4 fluid ounces and a standard deviation of 0.1 fluid ounce. (a) What is the probability a fill volume is less than 12 fluid ounces? (b) If all cans less than 12.1 or greater than 12.6 ounces are scrapped, what proportion of cans is scrapped? (c) Determine specifications that are symmetric about the mean that include 99% of all cans.	10	4	3
4	The time between the arrival of electronic messages at your computer is exponentially distributed with a mean of two hours. (a) What is the probability that you do not receive a message during a two-hour period? (b) If you have not had a message in the last four hours, what is the probability that you do not receive a message in the next two hours? (c) What is the expected time between your fifth and sixth messages?	10	3	3
5	A pharmaceutical company is testing a new drug, and historically, 80% of patients have shown improvement after using this drug. If a sample of 12 patients is selected, what is the probability that at least 10 patients will show improvement?	10	2	4

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	--	20	20	10	--	10	30	10	--	--



RV College of Engineering®

Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India

USN

Academic year 2023-2024 (EVEN Sem)

DEPARTMENT OF INDUSTRIAL ENGINEERING & MANAGEMENT

Date	22 nd July 2024	Maximum Marks	50
Course Code	IM343AI	Duration	90 Min
Sem	IV Semester	CIE - II	
CAD/CAM & ROBOTICS			

Note:

- Answer all the Questions.

Sl. No.	Questions	M	BT	CO
1	With the help of a block diagram explain the application of computer in design process.	10	L1	CO1
2	Express a line from (2, 3) to (6, 15) on a raster screen using Bresenham's Line Drawing Algorithm. Show the result in a Cartesian graph.	10	L3	CO1
3	YY Industry manufactures Automotive products with existing setup which has got 5 CNC turning centers and 5 CNC milling centers and 2 Robots. Can the Industry start manufacturing medical equipment's in the same set up? And suggest a suitable automation technique which is used in medical Industry.	10	L2	CO3
4	Productive uses of automation often involve people and technology working in parallel to complement one another. Automation in manufacturing is a means to keep the process moving from step to step from cycle to cycle without a human being having to intervene. We hear automation and we think...robots? Manufacturers are using significantly more robots, but five/three axis machining is also automation and is Automation replacing the people. Comment.	10	L3	CO3
5	How does an assessment of the Productivity Level being checked in Low Cost Automation.	10	L2	CO3

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	20	--	30	--	10	20	30	--	--	--



Academic Year 2023-2024 (EVEN Sem)

DEPARTMENT OF

INDUSTRIAL ENGINEERING & MANAGEMENT

Date	23 rd July 2024	Maximum Marks	50
Course Code	IM244AI	Duration	90 Min
Sem	IV	CIE - II	
OPERATIONS RESEARCH			

Note:

1. Answer all the Questions.

1. Answer all the Questions.

Sl. No.	Questions	M	BT	CO																																																																		
1	A salesman travels from one place to another; he cannot, however, travel from one place and back. The distances (in km) between pairs of cities are given below: To <table><tr><td></td><td>P</td><td>Q</td><td>R</td><td>S</td></tr><tr><td>From P</td><td>∞</td><td>15</td><td>25</td><td>20</td></tr><tr><td>Q</td><td>22</td><td>∞</td><td>45</td><td>55</td></tr><tr><td>R</td><td>40</td><td>30</td><td>∞</td><td>25</td></tr><tr><td>S</td><td>20</td><td>25</td><td>38</td><td>∞</td></tr></table> The problem is to chalk out a route which enables him to visit each of the cities only once, so that the total distance covered by him is minimum.		P	Q	R	S	From P	∞	15	25	20	Q	22	∞	45	55	R	40	30	∞	25	S	20	25	38	∞	10	2	2																																									
	P	Q	R	S																																																																		
From P	∞	15	25	20																																																																		
Q	22	∞	45	55																																																																		
R	40	30	∞	25																																																																		
S	20	25	38	∞																																																																		
2	A project with activities and predecessor are given in the following table: <table><tr><td>Activity</td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td><td>H</td><td>I</td><td>J</td></tr><tr><td>Predecessor</td><td>-</td><td>A</td><td>B</td><td>C</td><td>C</td><td>C</td><td>D</td><td>F</td><td>E</td><td>E</td></tr><tr><td>Duration</td><td>2</td><td>4</td><td>10</td><td>7</td><td>4</td><td>6</td><td>8</td><td>7</td><td>5</td><td>9</td></tr><tr><td>Activity</td><td>K</td><td>L</td><td>M</td><td>N</td><td>O</td><td>P</td><td>Q</td><td>R</td><td>S</td><td>T</td></tr><tr><td>Predecessor</td><td>H</td><td>I</td><td>G,F</td><td>G,F</td><td>J,K</td><td>M</td><td>N</td><td>O</td><td>P,Q</td><td>S,R</td></tr><tr><td>Duration</td><td>9</td><td>8</td><td>5</td><td>4</td><td>2</td><td>6</td><td>6</td><td>4</td><td>4</td><td>5</td></tr></table> i. Draw the network diagram ii. Find the critical path and total project duration.	Activity	A	B	C	D	E	F	G	H	I	J	Predecessor	-	A	B	C	C	C	D	F	E	E	Duration	2	4	10	7	4	6	8	7	5	9	Activity	K	L	M	N	O	P	Q	R	S	T	Predecessor	H	I	G,F	G,F	J,K	M	N	O	P,Q	S,R	Duration	9	8	5	4	2	6	6	4	4	5	10	3	3
Activity	A	B	C	D	E	F	G	H	I	J																																																												
Predecessor	-	A	B	C	C	C	D	F	E	E																																																												
Duration	2	4	10	7	4	6	8	7	5	9																																																												
Activity	K	L	M	N	O	P	Q	R	S	T																																																												
Predecessor	H	I	G,F	G,F	J,K	M	N	O	P,Q	S,R																																																												
Duration	9	8	5	4	2	6	6	4	4	5																																																												
3	Using the information given in question number 2, i. Find early start and early finish, late start and late finish of all activity ii. Calculate total float, free float and independent float for all activities.	10	3	3																																																																		
4	Consider the following project: <table><tr><td>Activity</td><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td></tr><tr><td>Precedence</td><td>-</td><td>-</td><td>A</td><td>B</td><td>B</td><td>C,D</td><td>E</td></tr><tr><td>Optimistic Time</td><td>3</td><td>2</td><td>2</td><td>2</td><td>1</td><td>4</td><td>1</td></tr><tr><td>Most Likely Time</td><td>6</td><td>5</td><td>4</td><td>3</td><td>3</td><td>6</td><td>5</td></tr><tr><td>Pessimistic Time</td><td>9</td><td>8</td><td>6</td><td>10</td><td>11</td><td>8</td><td>15</td></tr></table> i. Draw the network of the above project, calculate the expected time and variance for all the activities. ii. Identify the critical path and determine the project duration. iii. Find the probability that the project will be completing in 18 weeks.	Activity	A	B	C	D	E	F	G	Precedence	-	-	A	B	B	C,D	E	Optimistic Time	3	2	2	2	1	4	1	Most Likely Time	6	5	4	3	3	6	5	Pessimistic Time	9	8	6	10	11	8	15	10	4	4																										
Activity	A	B	C	D	E	F	G																																																															
Precedence	-	-	A	B	B	C,D	E																																																															
Optimistic Time	3	2	2	2	1	4	1																																																															
Most Likely Time	6	5	4	3	3	6	5																																																															
Pessimistic Time	9	8	6	10	11	8	15																																																															
5	Differentiate between CPM and PERT with reference to the following: i. Meaning ii. Orientation iii. Evolution iv. Model v. Estimates	10	2	2																																																																		

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	--	20	20	10	--	20	20	10	--	--



RV College of Engineering®

Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India

Go, change the world

USN

Academic Year 2023-2024 (EVEN Sem)

**DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT**

Date	23 rd July 2024	Maximum Marks	10
Course Code	IM244AI	Duration	30Min
Sem	IV	CIE - 2	
OPERATIONS RESEARCH			

Note:

- Answer all the Questions.

Sl. No.	Questions	M	BT	CO																									
1	A salesman needs to visit four cities: P, Q, R, and S. The distances between the cities are: PQ = 8 miles, QR = 12 miles, RS = 9 miles, SP = 15 miles. What is the approximate minimum total distance the salesman must travel to visit each city?	02	1	1																									
2	A project has two tasks: S and T. Task S takes 8 days, and Task T takes 4 days. If both tasks start simultaneously, but Task T is dependent on Task S, what is the slack time for Task T?	02	2	2																									
3	Using the following data, what is the total project variance? <table border="1"> <thead> <tr> <th>Activity</th><th>a</th><th>m</th><th>b</th><th>Predecessors</th></tr> </thead> <tbody> <tr> <td>A</td><td>6</td><td>10</td><td>14</td><td>-</td></tr> <tr> <td>B</td><td>8</td><td>9</td><td>13</td><td>A</td></tr> <tr> <td>C</td><td>4</td><td>12</td><td>20</td><td>A</td></tr> <tr> <td>D</td><td>6</td><td>8</td><td>10</td><td>B,C</td></tr> </tbody> </table>	Activity	a	m	b	Predecessors	A	6	10	14	-	B	8	9	13	A	C	4	12	20	A	D	6	8	10	B,C	02	3	3
Activity	a	m	b	Predecessors																									
A	6	10	14	-																									
B	8	9	13	A																									
C	4	12	20	A																									
D	6	8	10	B,C																									
4	One common heuristic used to approximate solutions to the TSP is the _____ algorithm, which builds a solution step by step by repeatedly selecting the shortest edge that connects a previously included city to a new city.	02	2	2																									
5	Network is the graphical display of a project that contains both _____ and _____.	02	2	2																									

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Quiz	Max Marks	2	6	2	--	2	6	2	--	--	--



RV College of Engineering®
Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India

Go, change the world

Academic year 2023-2024 (EVEN Sem)

**DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT**

INDUSTRIAL ENGINEERING & MANAGEMENT			
Date	24 th July 2024	Maximum Marks	50
Course Code	IM345AT	Duration	90 Min
Sem	IV	CIE – II	
MARKETING MANAGEMENT			

Note:

I. Answer all the Questions.

Sl. No.	Questions	M	BT	CO
1	What are the key metrics used to measure organic search ranking? How can businesses monitor and improve these metrics over time? Describe the process of conducting an SEO audit and implementing changes to optimize organic search ranking.	10	2	2
2	An educational institution is struggling to rank for competitive keywords related to online courses. Conduct an SEO audit of their website, identify key issues affecting organic search ranking, and recommend actionable solutions.	10	3	2
3	You are writing a blog post about a complex technical topic. Describe how you would integrate relevant keywords naturally into the content while ensuring it remains engaging and informative for readers.	10	3	2
4	Describe the importance of audience segmentation and personalization in email marketing. Provide a step-by-step guide on how to segment an audience effectively and personalize email content based on segmentation criteria. Use relevant examples to support your explanation.	10	2	3
5	Imagine you are a marketing manager for a startup selling organic skincare products. Develop a case study outlining the steps you would take to create and execute an effective e-mail campaign to launch a new product line. Include specific goals, target audience segmentation, content strategy, and metrics for success.	10	3	3

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	--	30	20	--	--	20	30	--	--	--



RV College of Engineering®

Mysore Road, RV Vidyaniketan Post,
Bengaluru - 560059, Karnataka, India

Academic year 2023-2024 (EVEN Sem)

DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT

Date	24 th July 2024	Maximum Marks	10
Course Code	IM345AT	Duration	30
Sem	IV	CIE - II	
MARKETING MANAGEMENT			

Note:

1. Answer all the Questions.

Sl. No.	Questions	M	BT	CO
Part - A				
1	Name two technical aspects of a website that can significantly impact its organic search ranking.	02	2	2
2	Define SEO and explain why it is important for online businesses.	02	2	2
3	What are two key considerations when writing SEO-friendly content for web pages	02	2	2
4	You are tasked with creating an effective email campaign to promote a summer sale for a fashion brand. Describe two strategies you would employ to increase open rates and click-through rates for the campaign.	02	2	3
5	After conducting an email marketing campaign for a travel agency, outline two specific metrics you would analyze to assess the campaign's performance.	02	2	3

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Quiz	Max Marks	--	06	04	--	--	10	--	--	--	--



Department of Civil Engineering

Date	23/7/2024	Maximum Marks	50
Course Code	CV242TA	Duration (minutes)	90
Sem	IV Semester	CIE-II	
ENVIRONMENT AND SUSTAINABILITY			

NOTE: All questions are compulsory.

QNo.	Questions	M	BT	CO
1.	The last two decades shows an alarming increase in global temperatures. The rise has been directly linked to the increase in _____	2	1	2
2.	Write two disadvantages of Tidal energy	2	1	2
3.	What is meant by Carbon Sequestration	2	1	3
4.	Write two objectives of fair trade	2	1	1
5.	How Corporate Social Responsibility leads to sustainability.	2	2	3

TEST - I				
QNo.	Questions	M	BT	CO
1.	Brief on i) Bio mass energy ii) Ocean Thermal Energy conversion	10	1	1
2.	Demonstrate on "Hydrogen energy is a clean energy" write the advantages and Disadvantages of Hydrogen energy as a energy source.	10	3	3
3.	Write on four approaches and principles of Green engineering.	10	1	3
4.	Explain the importance of Environmental auditing towards the sustainable growth	10	2	2
5 a	Explain Source and sink in Carbon cycle.	05	2	1
5. b	Explain the prescriptive based and incentive based Environmental Economics.	05	2	3

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	15	10	25		20	20	10	-	-	-



DEPARTMENT OF
BIOTECHNOLOGY
Academic year 2024-2025 (Even Sem)

Date	July 23, 2024	Maximum Marks	10 + 50
Course Code	BT242AT	Duration	120 min
Sem	IV Semester	Closed Book Offline Quiz and Test – 2	
Bio Safety Standards and Ethics (Basket course)			

Part B. Answer Part A in first two pages in sequence only

Answer all questions in Part A & Part B, Answer Part A in first two pages in sequence only

Part A

Questions	M	BT-L	CO
1 In food, the term used for disease causing microorganism is referred as	1	2	3
2 Mention the temperature range which is optimum for bacterial growth in food	1	1	4
3 What is the 6 th principle of HACCP ?	1	2	3
4 Mention the instrument used to multiply the DNA	1	1	3
5 Mention the concentration of the lead in food as per the What is the limit for lead in food as per FSSAI	1	2	3
6 Mention any two-food certification followed in the world	1	2	3
7 Expand the term GAP	1	2	4
8 People, premises, processes, products and procedures is related to _____	1	3	4
9 Mention any two examples for microbiological contamination	1	2	3
10 Mention the number of Licenses issued by FSSAI	1	2	3

Part B

Sl. No	Questions (Test)	M	BT-L	CO
1.	Mention the physical, chemical, and biological hazardous material which contaminate the food.	10	2	3
2	Expand the term FSSAI, illustrate its functions, importance & type of license issued by them.	10	3	3
3	Discuss various methods to eliminate the chemical, Biological and physical hazardous materials from food.	10	3	3
4	Expand the term HACCP and explain in detail the principles of HACCP.	10	3	4
5a	List out the food spoilage microorganisms and explain the diseases caused by them.	5	3	4
5b	Mention the GMP and GLP in maintaining the food hygiene	5	3	4

BT-L-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	---	--	37	24	2	17	41	---	---	--



Department of Mechanical Engineering

CIE – II

Date	22nd July 2024	Maximum Marks	50 +10
Course Code	ME242AT	Duration	120 Min
Course Name	Material Science for Engineers	USN:	

PART A

Q. No.		M	BT	CO
1	Photodiodes serve as _____ in optical communication systems.	1	1	2
2	A light controlled variable resistor, whose resistance decreases with increasing incident light intensity is known as _____.	1	1	2
3	Name the fundamental semiconductor devices that act as amplifiers or switch.	1	1	2
4	The insulating materials having ability to store and support the transmission of electric charge without conducting it are known as _____.	1	1	2
5	Name the alloying element mainly responsible for the high corrosion resistance property in stainless steel.	1	1	2
6	Mention two advantage of non-ferrous alloys over the ferrous alloys	2	1	2
7	The process involves shaping a material by forcing it through a die to create a specific cross-sectional shape is known as _____.	1	1	2
8	Name the type of polymer which become soft upon heating and become hard and rigid on cooling also do not have cross linking and branching.	1	1	2
9	Give an example of natural composites.	1	1	2

Q. No.	PART B	M	BT	CO
1	Illustrate the working principle and state the applications of the following optoelectronic devices: i) LED ii) Photo resistor iii) photo transistor	10	3	2
2a.	List any five common dielectric materials along with their applications.	05	2 3	2
2b.	Explain the effects of different alloying elements on steel.	05		
3.	Explain the properties and applications of following materials with examples. i) Polymers ii) Metal matrix composites	10	3	2
4.	Illustrate the properties and applications of four types of cast iron.	10	3	2
5a	Explain the metal casting process. Write the advantages and disadvantages of any two casting processes.	05	3	2
5b	Write the properties and applications of bio-materials.	05	2	

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L
	TEST	Marks	-	50	-	-		10	40			
	QUIZ			10			10					

Academic year 2022-2023 (Even Sem)

DEPARTMENT OF
INDUSTRIAL ENGINEERING AND MANAGEMENT

Date	21 st August 2023	Maximum Marks	50
Course Code	21IM41	Duration	90 Min
Sem	IV Semester	CIE-II	
STATISTICS FOR DATA ANALYTICS			

Note:

1. Answer all the Questions.
2. Use of statistical tables permitted

Q. No.	Questions	M	BT	CO																																												
1.	BBMP in Bangalore city has installed 2000 electric lamps for street lighting in an area. These lamps have a mean burning life of 1000 hours with a standard deviation of 200 hours. Assume normal distribution is a close approximation to this case. - What is the probability that a lamp will fail in the first 700 burning hours? - What is the probability that a lamp will fail between 900 and 1300 burning hours? - How many lamps are expected to fail between 900 and 1300 burning hours? - What is the probability that a lamp will burn for exactly 900 hours? - What is the probability that a lamp will burn between 899 hours and 901 hours before it fails? - After how many burning hours would we expect 10% of the lamps to be left?	(15)	L3	CO3																																												
2.	Data for an increase in blood pressure, y(in mm of Hg) versus sound level exposure, x(in decibels) are given below for 20 instances: <table border="1"> <tbody> <tr> <td>x</td><td>60</td><td>63</td><td>65</td><td>70</td><td>70</td><td>70</td><td>80</td><td>90</td><td>80</td><td>80</td></tr> <tr> <td>y</td><td>1</td><td>0</td><td>1</td><td>2</td><td>5</td><td>1</td><td>4</td><td>6</td><td>2</td><td>3</td></tr> <tr> <td>x</td><td>85</td><td>89</td><td>90</td><td>90</td><td>90</td><td>90</td><td>90</td><td>100</td><td>100</td><td>100</td></tr> <tr> <td>y</td><td>5</td><td>4</td><td>6</td><td>8</td><td>4</td><td>5</td><td>7</td><td>9</td><td>7</td><td>6</td></tr> </tbody> </table> - Draw a scatter diagram of y v/s x. Does a simple linear regression model seem reasonable? - Fit the simple linear regression model using least squares. Find an estimate of σ^2 - Find the predicted blood pressure at a sound level of 85dB. What is the residual in this case? - Find the predicted blood pressure at a sound level of 75dB and 105dB	x	60	63	65	70	70	70	80	90	80	80	y	1	0	1	2	5	1	4	6	2	3	x	85	89	90	90	90	90	90	100	100	100	y	5	4	6	8	4	5	7	9	7	6	(15)	L3	CO3
x	60	63	65	70	70	70	80	90	80	80																																						
y	1	0	1	2	5	1	4	6	2	3																																						
x	85	89	90	90	90	90	90	100	100	100																																						
y	5	4	6	8	4	5	7	9	7	6																																						
3.	For a set of 20 pairs of values (x_i, y_i), $\sum x_i^2 = 29.29$, $\sum y_i^2 = 170044.53$, $\sum x_i y_i = 2214.66$, $\sum x_i = 23.92$, $\sum y_i = 1843.21$. Write the regression line equation. Subsequently it was found that the values for the pair $(x_{20}, y_{20}) = (2, 90)$ was actually wrong and the correct pair $(x_{20}, y_{20}) = (0, 60)$ was inserted in the set after deleting the wrong pair. Write the new regression line equation. What is the residual at $x = 0$ with the corrected data set?	(10)	L4	CO2																																												



RV Educational Institutions[®]
RV College of Engineering[®]

Autonomous
Institution Affiliated
to Visvesvaraya
Technological
University, Belagavi

Approved by AICTE,
New Delhi

Go, change the world

Academic year 2022-2023 (Even Sem)

4.	The diameter of the dot produced by a printer is normally distributed with a mean diameter of 0.002 inch and a standard deviation of 0.0004 inch. (i) What is the probability that the diameter of a dot exceeds 0.0026 inch? (ii) What is the probability that a diameter is between 0.0014 and 0.0028 inch? (iii) What is the probability that the diameter of a dot measures at most 0.0024 inch (iv) What standard deviation of diameters is needed so that the probability in part (ii) is 0.995?	(10)	L3
----	--	------	----

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution	Particulars		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	10	40	—	—	—	40	10	—	—	—

Academic year 2022-2023 (Even Sem)

DEPARTMENT OF
INDUSTRIAL ENGINEERING AND MANAGEMENT

Date	23 rd August 2023	Maximum Marks	50
Course Code	21IM43	Duration	90 Min
Sem	IV Semester	CIE - II	
CAD/CAM & ROBOTICS			

Note:

1. Answer all the Questions.

Sl. No.	Questions	M	BT	CO
1.	The process of designing something is characterized by Shigley as an interactive procedure which consists of six identifiable steps. Elaborate the steps with block diagram.	10	L1	CO1
2.	Express a line from (12, 14) to (22, 18) on a raster screen using Bresenham's Line Drawing Algorithm. Show the result in a Cartesian graph.	10	L3	CO2
3.	Derive Bresenham's circle Drawing Algorithm. Considering Bresenham's circle Drawing Algorithm draw a circle with radius 14 and centre (2,2).	10	L1	CO2
4.	Identify major socio-economic considerations favoring automation.	10	L2	CO3
5.	How does an assessment of the Productivity Level being checked in Low Cost Automation.	10	L2	CO3

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution		Particulars	CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
	Test	Max Marks	10	20	20	--	20	20	10	--	--	--

Academic year 2022-2023 (EVEN Sem)

DEPARTMENT OF
INDUSTRIAL ENGINEERING & MANAGEMENT

Date	22 nd August 2023	Maximum Marks	50
Course Code	21IM44	Duration	90 Min
Sem	IV	CIE – II	
MARKETING MANAGEMENT			

Note:

1. Answer all the Questions.

Sl. No.	Questions	M	BT	CO
1.	Compare and contrast on-page SEO and off-page SEO techniques, providing examples of each.	10	2	1
2.	Discuss the key metrics used to measure the success of a social media marketing campaign and explain why these metrics are important for evaluating performance.	10	2	2
3.	Explain the importance of social listening and monitoring in social media marketing, and how it can help businesses manage their online reputation effectively.	10	3	2
4.	Analyze the significance of bounce rate, exit rate, and average session duration as essential metrics in evaluating website engagement and user behavior.	10	3	3
5.	Take any product of your choice and identify any one social media to market your product. Give justification for the selection of the social media.	10	2	1

BT-Blooms Taxonomy, CO-Course Outcomes, M-Marks

Marks Distribution		CO1	CO2	CO3	CO4	L1	L2	L3	L4	L5	L6
Particulars											
Test	Max Marks	20	20	10	--	--	30	20	--	--	--
