

SR $\rightarrow$ D


$\begin{matrix} D \\ S \rightarrow R \end{matrix}$	$Q(t)$	$Q(t+1)$	S	R
0	0	0	0	X
0	1	0	0	1
1	0	1	1	0
1	1	1	X	0

$\begin{matrix} Q(t) \\ D \end{matrix}$	0	1
0	0	0
1	1	X

$$S = D$$

$\begin{matrix} Q(t) \\ D \end{matrix}$	0	1
0	X	1
1	0	0

$$R = D'$$

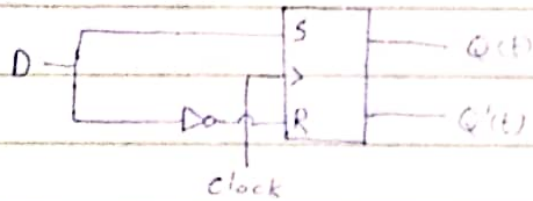

SR $\rightarrow$ JK


J	K	$Q(t)$	$Q(t+1)$	S	R
0	0	0	0	0	X
0	0	1	1	X	0
0	1	0	0	0	X
0	1	1	0	0	1
1	0	0	1	1	0
1	0	1	1	X	0
1	1	0	1	1	0
1	1	1	0	0	1

$$S = JQ(t)$$

	0	1
0	0	x
1	x	0

$$R = JKQ(t)$$

	0	1
0	x	0
1	0	0

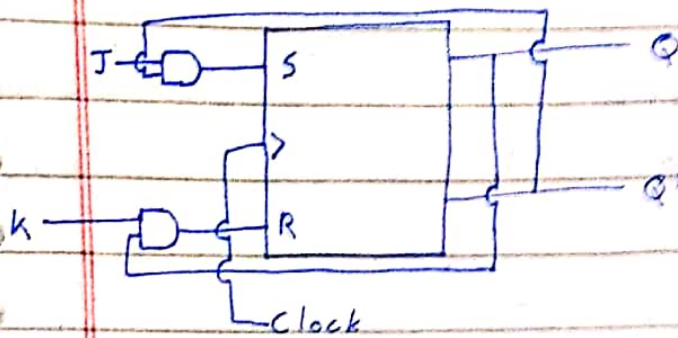

SR → T


T	Q(t)	Q(t+1)	S	R
0	0	0	0	x
0	1	1	x	0
1	0	1	1	0
1	1	0	0	1

$$S = TQ'(t)$$

	0	1
0	0	x
1	1	0

$$R = TQ(t)$$

	0	1
0	x	0
1	0	1

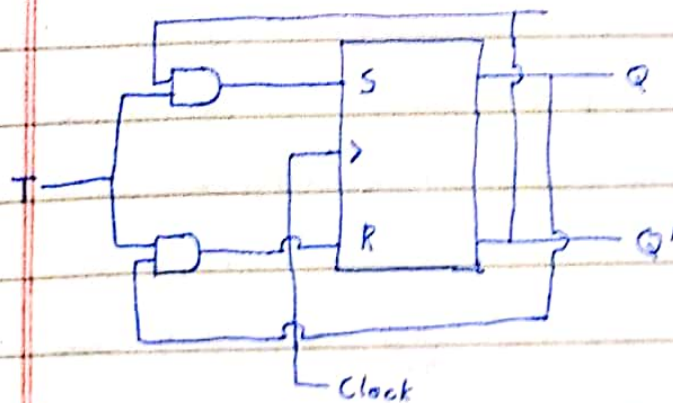


D → SR

S	R	Q(t)	Q(t+1)	D
0	0	0	0	0
0	0	1	1	1
0	1	0	0	0
0	1	1	0	0
1	0	0	1	1
1	0	1	1	1
1	1	X	X	X
1	1	X	X	X

S \ RQ	00	01	11	10
0	0	1	0	0
1	0	1	X	X

~~D = Q(t)~~ $D = S + R Q'(t)$

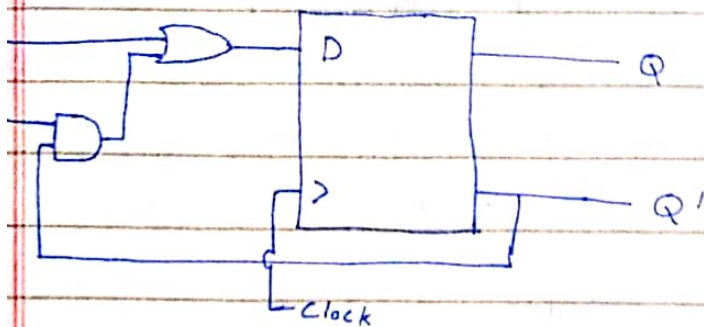


D → T

T	Q(t)	Q(t+1)	D
0	0	0	0
0	1	1	1
1	0	1	1
1	1	0	0

T \ Q	0	1
0	0	1
1	1	0

$D = T Q'(t) + T' Q(t)$

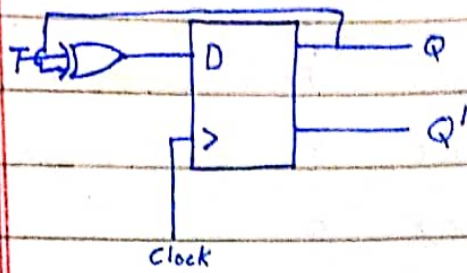


$D \rightarrow JK$

J	K	$Q(t)$	$Q(t+1)$	D
0	0	0	0	0
0	0	1	1	1
0	1	0	0	0
0	1	1	0	0
1	0	0	1	1
1	0	1	1	1
1	1	0	1	10
1	1	1	0	0

$J \backslash K_{qt}$	00	01	11	10
0	0	1	0	0
1	1	1	0	0

$$D = J Q'(t) + \cancel{J' Q'(t)} + K' Q(t)$$

$$\cancel{D = J(Q'(t) + K') + K' Q(t)}$$

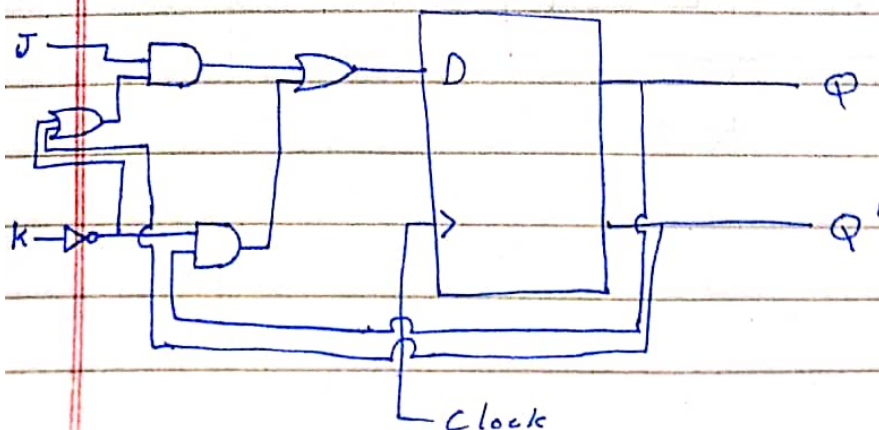


$JK \rightarrow D$

D	$Q(t)$	$Q(t+1)$	J	K
0	0	0	0	x
0	1	0	x	1
1	0	1	1	x
1	1	1	x	0

0	x
1	x

x	1
x	0

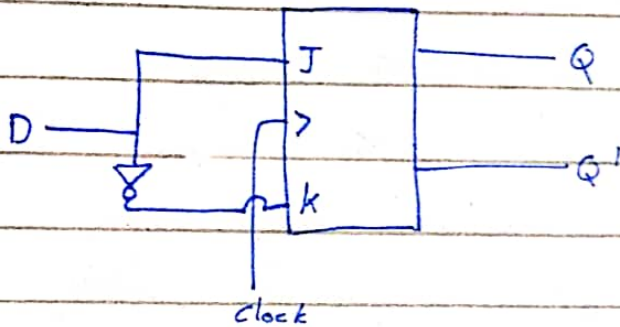


$JK \rightarrow T$

T	$Q(t)$	$Q(t+1)$	J	K
0	0	0	0	x
0	1	1	x	0
1	0	1	1	x
1	1	0	x	1

0	x
1	x

x	0
x	1

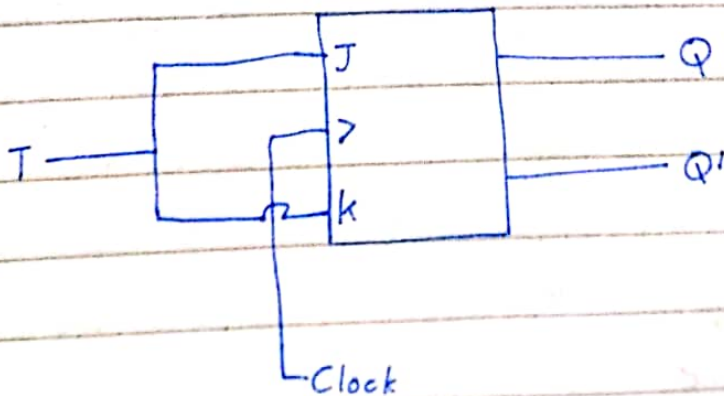


T → SR

S	R	Q(t)	Q(t+1)	T
0	0	0	0	0
0	0	1	1	0
0	1	0	0	0
0	1	1	0	1
1	0	0	1	1
1	0	1	1	0
1	1	0	X	X
1	1	1	X	X

S	R	Q(t)	Q(t+1)	T	Q
0	0	0	0	0	0
0	0	1	1	0	1
0	1	0	0	0	0
0	1	1	0	1	1
1	0	0	1	1	0
1	0	1	1	0	1
1	1	0	X	X	X
1	1	1	X	X	X

$$T = S \cdot Q(t) + R \cdot Q(t)$$

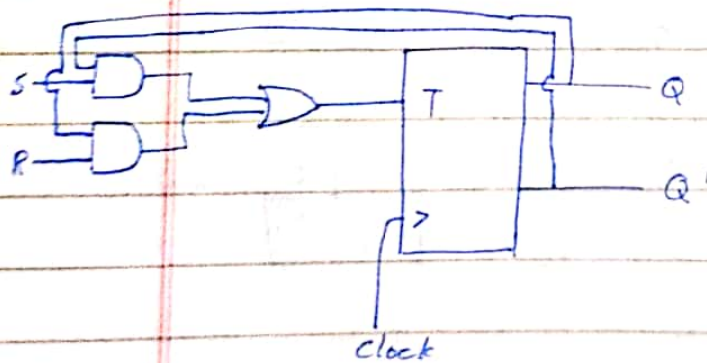

T → D

D	Q(t)	Q(t+1)	T
0	0	0	0
0	1	0	1
1	0	1	1
1	1	1	0

leave

$\frac{D}{Q}$	0	1
0	0	1
1	1	0

$$T = D \oplus Q$$