


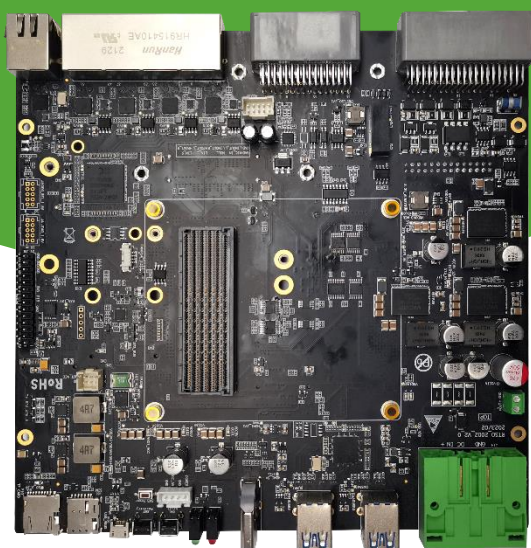

RTSO-2002 is an industrial-grade carrier board for AGX Orin, operating temperature $-20^{\circ}\text{C}\sim+80^{\circ}\text{C}$, low power consumption, high security level, can meet a variety of harsh conditions.

The NVIDIA Jetson AGX Orin module is a processor for machine deep learning introduced by NVIDIA. It has powerful computing power and small module area. It is mainly aimed at the rapid development of artificial intelligence market in recent years, such as automatic driving, AGV car, logistics car, robot and other fields, and has a broad application prospect.

RTSO-2002 carrier board with NVIDIA Jetson AGX Orin module, driven by Realtimes RTS Linux4Tegra software support package, form a board-level system solution that can be powered on and run, which is convenient to integrate into the overall project design and rapid development.

Feature

- Compatible with NVIDIA Jetson AGX Orin processors
- 4 USB interfaces, 5 Gigabit Ethernet, HDMI to meet the basic functional interface requirements of the system
- M.2 key M interface, supporting large capacity and high-speed SSD storage expansion
- M.2 key B interface, which supports 5G communication module access and realizes high-speed wireless network
- Mini-PCIe interface for 4G or digital video capture card access
- Scalable GMSL camera or SATA storage

Specifications

Interface	PN	RTSO-2002
AI Core		AGX Orin
Preinstalled system		Ubuntu20.04
Display		1 x HDMI TYPE A interface;
USB		4 x USB TYPE A 3.0 ports GEN1, support usb2.0, usb3.1 signals, provide 1A output current; 1 x Micro USB interface for system burning;
Network		5 x Gigabit Ethernet (10/100/1000Mbps adaptive; Half-duplex/full-duplex adaptive)
Storage		1 x MicroSD card slot;
SIM		1 x Micro SIM card slot;
PCIe		1 x Mini PCIe port;
M.2		1 x M.2 key M interface; 1 x M.2 key B interface;
Output Power		1 x Power output interface; (consistent with input voltage)
Expansion Interface		1 x High-speed expansion connector, 2 x Low-speed expansion double-row pins; (Scalable GMSL camera or SATA storage)
Multi-function interface		2 x Multifunctional double-row pins; (support 2 x I2C, 2 x SPI, 1 x Debug RS232, 2 x RS232, 2 x RS485, 4 x GPI, 4 x GPO, 2 x CAN, 1 x SYNC IN, 1 x SYNC OUT, 1 x SYNC PPS, 1 x POWER OUT)
RTC		1 x RTC battery interface, 1 x RTC battery holder;
FAN		1 x Fan control interface;
Button		1 x Reset button; 1 x Recovery button; 1 x Power button;



RTSO-2002 Carrier Board

PN: RTSO-2002

Adaptive NVIDIA Jetson AGX Orin

Hardware Version: V2.0

Weight

About 395g

Other Parameters

PN	RTSO-2002
Input voltage	+9V---+36V
Operation temperature	-20~+80°C

Ordering information

PN	Information
RTSO-2002	Carrier Board RTSO-2005*1;




Recommended Accessories

PN	Information
RTST-2002-GMSL (Option)	GMSL camera extension board, adapted to RTSO-2002 carrier board, supports 8-channel GMSL2 camera
RTST-2002-SATA (Option)	SATA expansion board, suitable for RTSO-2002 carrier board, supports 2 channels of SATA3.0 interface (can connect 3.5 inch and 2.5 inch SATA disk)



RTS0-2002 Carrier Board
PN: RTS0-2002
Adaptive NVIDIA Jetson AGX Orin
Hardware Version: V2.0

Product size

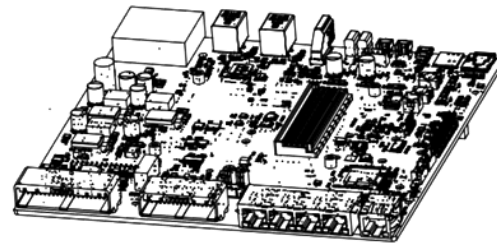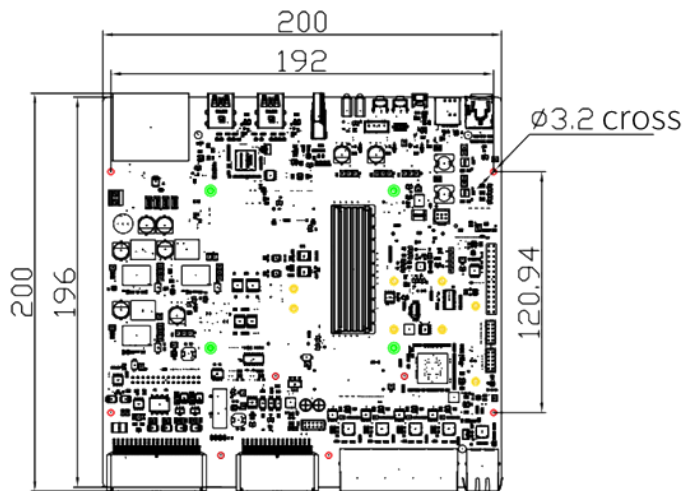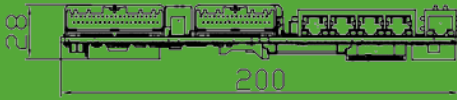

Product appearance

