

A Method for Passive Identification of Spacecraft	1
Using Doppler-Based Trajectory Matching	2
Fedor Ivanovich Vtorov ^{1*}	3
¹ Department of Automated Control Systems, National University of Science and Technology MISIS, Moscow, Russia .	4 5
Abstract	6
This paper presents a passive method for identifying unknown spacecraft using the Doppler signature of a single satellite pass, requiring neither training data nor the precise knowledge of the transmitter carrier frequency. Doppler shifts are extracted from SDR IQ samples via a phase-locked loop and averaged into a one second time series. Candidates from an open Two-Line Element catalog are processed by a seven-stage filtering algorithm before predicted Doppler tra- jectories are generated using a computationally efficient combination of SGP4 propagation and F&G (Lagrange coefficient) functions. Observed and predicted series are independently mean-centered to cancel unknown carrier offsets and SDR oscillator instability, and candidates are ranked by root-mean-square error. Using consumer-grade SDR receivers, the method achieved 28 successful single pass identifications across the VHF, UHF, L-, and S-bands, with the correct satellite ranking first in every case and an RMSE typically several times lower than the nearest competing candidate. The implementation is released as open- source software. These results show that accurate, low-cost passive spacecraft identification is achievable without specialized infrastructure or prior calibration.	7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22
Keywords: Passive satellite identification, Doppler frequency shift, single pass identification, Software-defined radio, Space situational awareness, Non-cooperative identification, Two-Line Element set, SGP4, F&G functions	23 24 25

26 **Contents**

27	1 Introduction	4
28	2 Theoretical Foundations of Passive Doppler Satellite Identification	7
29	2.1 Doppler Frequency Shift in Satellite Observation Problems	7
30	2.2 Frequency Extraction from SDR Signals	8
31	2.3 Orbit Propagation Models	8
32	3 Method for Passive Satellite Identification Based on Doppler Match-	
33	ing	9
34	3.1 General System Architecture	9
35	3.2 Hardware and Measurement Setup	10
36	3.2.1 SDR Receiver Chain	10
37	3.2.2 Reference Frequency Stability Assessment	13
38	3.3 Doppler Signature Extraction	13
39	3.3.1 IQ Data Stream and Preprocessing	13
40	3.3.2 Initial Frequency Estimation via FFT	14
41	3.3.3 Signal Tracking via Phase-Locked Loop (PLL)	14
42	3.3.4 Formation of the Frequency Time Series	16
43	3.4 Generation of Predicted Doppler Trajectories	16
44	3.4.1 TLE Acquisition and Processing	16
45	3.4.2 Orbit Propagation via SGP4 + F&G Functions	17
46	3.4.3 Observer Motion Model	18
47	3.4.4 Computation of the Predicted Doppler Shift	19
48	3.5 Satellite Identification Algorithm	19
49	3.5.1 Prefiltering of Candidate Satellites	19
50	3.5.2 Trajectory Normalisation	21
51	3.5.3 Matching Metric	22

3.5.4	Computational Complexity of the Algorithm	22	52
4	Experimental Study	24	53
4.1	Experimental Methodology	24	54
4.2	Satellite Identification Results	25	55
5	Discussion and Conclusion	29	56
5.1	Main Findings	29	57
5.2	Directions for Further Development	29	58

59 1 Introduction

60 Low earth orbit has grown significantly more congested over the past decade. The
61 Starlink constellation alone already comprises more than 8,000 satellites and is planned
62 to expand to approximately 42,000 spacecraft within the next decade (Yang et al.
63 2026). A direct consequence is denser artificial radio frequency emissions, which make
64 identification of individual sources substantially harder. When telemetry is unavailable
65 or access is restricted, linking a received signal to a specific spacecraft becomes a
66 nontrivial problem.

67 The existing approaches to this problem can be divided into three broad categories.

68 The first category comprises governmental space surveillance infrastructures, such
69 as the Space Surveillance Network (SSN) and NORAD. They operate as distributed
70 networks of specialized ground-based and orbital observation assets (Kelso 1997).
71 Such systems are unfortunately inaccessible to independent and academic users. The
72 growing number of tracked objects also introduces significant computational chal-
73 lenges associated with correlating uncataloged observations (Phillion et al. 2014). It
74 is important to mention that some systems in this category rely on optical observa-
75 tions, including astrometric tracking and photometric light curve analysis. Since these
76 methods require line-of-sight visibility and depend on favorable illumination condi-
77 tions, they are complementary to RF-based techniques and are outside the scope of
78 this work.

79 The second category consists of radio-frequency fingerprinting (RFF) techniques
80 based on physical imperfections of the transmitter hardware. In restricted scenar-
81 ios, particularly for Iridium and GPS constellations, this approach works well, with
82 reported accuracies of 80–100% when convolutional neural networks are used for clas-
83 sification (Oligeri et al. 2020; Solenthaler et al. 2025). However, RFF methods require
84 the collection of substantial training datasets through extensive measurement cam-
85 paigns. Furthermore, as demonstrated by Solenthaler et al. (2025), such methods

are typically tailored to known signal types, require separate training for each new constellation, and cannot generalize to arbitrary spacecraft in an open catalog.

The third category encompasses methods based on Doppler frequency shift measurements. Their physical generality makes them the most natural starting point for the present work. None of the works reviewed below fully solves the identification problem as defined here. The study "Non-Cooperative LEO Satellite Orbit Determination Using Single Station" ([Deng et al. 2024](#)) performs non-cooperative orbit determination from Doppler measurements collected at a single ground station. However, accurate orbit estimation requires approximately 24 hours of accumulated observations. The work of [Spiridonov et al. \(2021\)](#) addresses the identification of an unknown spacecraft using Doppler measurements and Two-Line Element (TLE) catalog data, but relies on observations spanning multiple orbital revolutions. Finally, passive characterization of spacecraft through analysis of Doppler curves was demonstrated by [Richmond and Raichle \(2018\)](#). Their implementation, however, utilized a decommissioned S-band phased-array antenna system that is not easily accessible for researchers and small satellite operators.

The key gaps are therefore: the absence of a method capable of operating using data from a single satellite pass, the dependence of existing approaches on precise knowledge of the carrier frequency, and the limitation of most solutions to a single frequency band.

Accessible passive monitoring tools are needed across several domains. In radio astronomy, satellite transmissions may exceed the power levels of astrophysical sources by many orders of magnitude. Furthermore, certain classes of radio interference can imitate Doppler-like patterns characteristic of transient astrophysical events, thereby generating false detections in automated discovery systems ([Yang et al. 2026](#)). Small satellite operators frequently encounter difficulties identifying their own satellites following deployment from a launch vehicle: existing onboard identification methods

113 exhibit substantial failure rates ([Skinner et al. 2022](#)). Finally, regulatory monitoring of
114 radio-frequency spectrum usage requires the ability to identify spacecraft transmitting
115 outside their allocated frequency bands.

116 The aim of this work is to develop and experimentally validate a method for passive
117 satellite identification based on the Doppler signature of a single pass while imposing
118 minimal requirements on computational resources and hardware infrastructure.

119 The novelty of the proposed approach is defined by three key aspects. First, unlike
120 orbit determination methods ([Deng et al. 2024](#); [Spiridonov et al. 2021](#)), identification
121 is performed using data from a single pass without the need to accumulate observa-
122 tions over multiple orbital revolutions. Second, the method does not require precise
123 knowledge of the carrier frequency. Systematic errors caused by the instability of the
124 receiver’s and transmitter’s reference oscillators, as well as tuning inaccuracy is elimi-
125 nated through an averaging operation applied during signature matching. As a result,
126 the approach remains applicable to receivers such as the HackRF One and similar
127 consumer-grade software-defined radio (SDR) platforms that do not possess ultra-
128 stable frequency references. Third, unlike RFF-based techniques ([Oligeri et al. 2020](#);
129 [Solenthaler et al. 2025](#)), the proposed method is applicable to any spacecraft repre-
130 sented within an open TLE catalog and does not require prior collection of training
131 data. In addition, a computationally efficient scheme is proposed for generating a cat-
132 alog of predicted signatures through a combination of the SGP4 propagation model
133 and F&G functions.

134 To achieve the stated objective, the following tasks are addressed:

- 135 1. Development of a method for extracting Doppler signatures from IQ (In-phase and
136 Quadrature) data using a phase-locked loop (PLL).
- 137 2. Construction of a model relating Doppler frequency shift to relative velocity while
138 accounting for acceptable approximations.

3. Development of a computationally efficient orbit propagation approach based on a combination of SGP4 and F&G functions.	139 140
4. Design of an algorithm for candidate selection and matching of observed and predicted trajectories.	141 142
5. Development and verification of a procedure for compensating receiver reference frequency instability.	143 144
6. Experimental validation of the proposed method using real-world observations in the VHF, UHF, L-, and S-bands.	145 146

The proposed method can be implemented on consumer-grade SDR hardware, making passive satellite identification broadly accessible for scientific, engineering, and regulatory use.

2 Theoretical Foundations of Passive Doppler Satellite Identification

2.1 Doppler Frequency Shift in Satellite Observation Problems

The Doppler frequency shift arises from the relative motion of a radiation source and an observer along the line of sight. For electromagnetic waves, the observed frequency increases as the source and observer approach one another and decreases as they recede. In the classical case the observed frequency is given by:

$$f_{\text{obs}} = \frac{c + v_0}{c - v_s} f_{\text{sat}} \quad (1)$$

where f_{obs} is the observed frequency, f_{sat} is the transmitter frequency, v_0 is the observer speed toward the source, v_s is the source speed toward the observer, and c is the speed of light. Positive velocities correspond to mutual approach.

For near Earth satellites, since the relative velocity is well below the speed of light, $v_{\text{rel}} \ll c$, the first-order approximation can be used:

$$v_{\text{rel}} \approx \left(\frac{f_{\text{obs}}}{f_{\text{sat}}} - 1 \right) c \quad (2)$$

162 The neglected second-order term, originating from a Taylor expansion of Equation 1,
 163 takes the form:

$$\frac{v_s(v_s + v_0)}{c^2} \quad (3)$$

164 Even at the upper end of LEO velocities, where $v_{\text{rel}} \approx 1.2 \times 10^4$ m/s, the
 165 resulting error is on the order of 10^{-9} . For an S-band signal at 2.25 GHz this is
 166 roughly 3 Hz, which is well below the frequency errors typical of consumer-grade SDR
 167 receivers (Bednarz et al. 2024).

168 2.2 Frequency Extraction from SDR Signals

169 Estimating the instantaneous frequency of a signal from complex IQ samples is a well-
 170 established problem in digital signal processing. For satellite signals it is addressed in
 171 software using SDR receivers through a combination of spectral analysis and phase-
 172 tracking techniques (Guo et al. 2015; Gao et al. 2016). A significant practical constraint
 173 is the reference oscillator instability of low cost SDR platforms, which can introduce
 174 systematic offsets into measured frequency values (Bednarz et al. 2024). The specific
 175 methods used in this work to extract Doppler signatures from IQ data are described
 176 in Section 3.3.

177 2.3 Orbit Propagation Models

178 The standard format for orbital data on objects tracked by space surveillance networks
 179 is the Two-Line Element set (TLE), distributed by organizations such as CelesTrak.
 180 Orbit Mean-Element Messages (OMMs) defined by the Consultative Committee for
 181 Space Data Systems (CCSDS) provide a modern, machine-readable representation of
 182 the same mean orbital elements and associated metadata as TLEs, while avoiding the

ambiguities and formatting limitations of the TLE format ([for Space Data Systems](#) 183
[2009](#)). Orbit propagation from both TLE and OMM data is performed using the SGP4 184
analytical model, which accounts for the principal perturbations acting on a satellite 185
and is the standard in near Earth space object tracking ([Vallado et al. 2006](#)). Due to 186
the simplicity and availability of the TLE element sets during the development stages 187
of the project, the developed program uses TLEs in favor of OMMs. Alongside SGP4, 188
propagation of the orbital state vector may be performed via Lagrange coefficients (the 189
F&G functions) which return the satellite position and velocity at an arbitrary epoch 190
analytically within the two-body framework ([Sharifi and Seif 2011](#); [Seif 2017](#)). The use 191
of these tools to generate predicted Doppler signatures is described in Section 3.4. 192

3 Method for Passive Satellite Identification Based 193 on Doppler Matching 194

3.1 General System Architecture 195

The system operates in two modes: real-time and post-processing. In real-time mode, 196
data is received directly from the SDR receiver via SDR++, a cross platform software- 197
defined radio application ([Rouma 2021](#)). In post-processing mode, the input is a 198
frequency time series file produced during a prior observation, with the option to over- 199
ride timestamps and observer coordinates. Since the two modes differ only in how input 200
data is supplied, the following describes the common processing pipeline, illustrated 201
in Figure 1. 202

In the first stage, complex IQ samples are sent from the IQ Exporter module of 203
SDR++ to the application over TCP and accumulated in an internal buffer. If the 204
signal contains a clear carrier, an optional initial frequency estimate is computed via 205
the Fast Fourier Transform (FFT) and used to initialise the numerically controlled 206
oscillator (NCO). If this FFT step is skipped, the NCO is initialised with zero offset 207

relative to the center frequency of the VFO. The signal is then tracked by a phase-locked loop (PLL). The PLL output samples are averaged over one second intervals to form a frequency time series.

At the same time, TLE sets are retrieved from a local database that is updated in advance to avoid exceeding external API rate limits. Based on the observed frequency at the initial epoch t_0 and specified spatiotemporal constraints, multi-stage candidate prefiltering reduces the object set to a manageable size. Such filtering schemes are widely used in observation-correlation and hypothesis-space reduction problems (Phillion et al. 2014). For each candidate that passes filtering, SGP4 computes the satellite position and velocity at t_0 , after which F&G functions propagate the state to all subsequent observation epochs. The observer position in the GCRS frame at any epoch is obtained by rotating the ITRS vector by the angle corresponding to elapsed time. Predicted Doppler shifts are computed from the satellite-observer relative position vector. The observed and predicted series are independently centered by subtracting their respective means, and an RMSE value is computed for each candidate. The final candidate list is ranked in ascending order of RMSE.

3.2 Hardware and Measurement Setup

3.2.1 SDR Receiver Chain

Three software-defined radio receivers were used in the experimental study. The first is the LibreSDR B210 mini, based on the AD9361 transceiver, with a specified reference oscillator stability of 0.5 ppm. Its architecture is close to that of the USRP B200 mini, whose characteristics are studied in detail in the study by Bednarz et al. (2024). The second is the HackRF One (Clifford R10+ revision) fitted with an external temperature-compensated crystal oscillator (TCXO) specified at 0.1 ppm. The third is the RTL-SDR v3 with a specified oscillator stability of 1 ppm. The HackRF and the B210 mini were used interchangeably for VHF, UHF, L- and S-band observations,

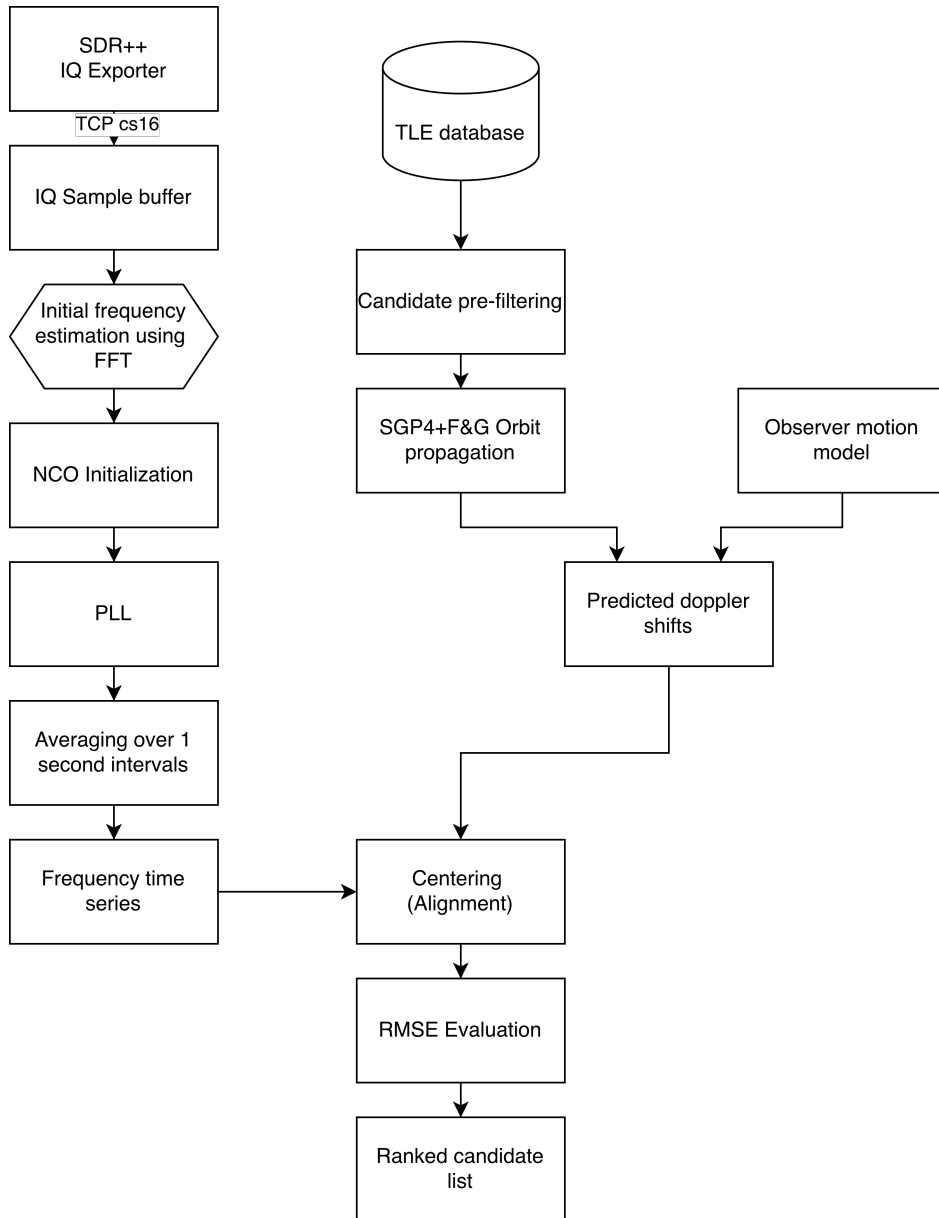


Fig. 1 Generalized processing chain of the passive Doppler satellite identification system.

whereas the RTL-SDR v3 was used in the L band only. No quantitative comparison 234
between receivers was performed within the scope of this work. A GPS-disciplined 235

oscillator (GPSDO) was intentionally excluded from the setup, as one of the objectives of this work is to demonstrate the applicability of the method on widely available consumer hardware.

The antenna front-ends varied by frequency band. In the VHF band a telescopic V-dipole antenna was used; in the UHF band a consumer-grade 7-element Yagi-Uda antenna with a folded dipole was used. Neither configuration included an external low-noise amplifier (LNA).

For the L and S bands an identical reflector, a 0.9m offset parabolic dish (AX-OFFSET D90), was used with different feeds and amplifier chains. In the L band, a left-hand circularly polarised (LHCP) helical feed, designed using an online calculator ([Calculator 2024](#)), was mounted at the focal point of the reflector. Due to polarisation reversal upon reflection from a parabolic surface ([Kraus and Marhefka 2002](#)), the system provides effective reception of right-hand circularly polarised (RHCP) signals from the source side. The receiving chain comprised a two-stage LNA with a SAW filter optimised for 1690 MHz, followed by a broadband LNA based on the TQP3M9037 transistor. In the S-band, a separate LHCP helical feed designed by the same method was used together with the SeLNA v1 LNA ([SeLNA-v1 2026](#)), a modified ADS-B LNA with replacement bandpass filters adapted for 2200-2300 MHz. The two receiving chains are shown in Figure 2.

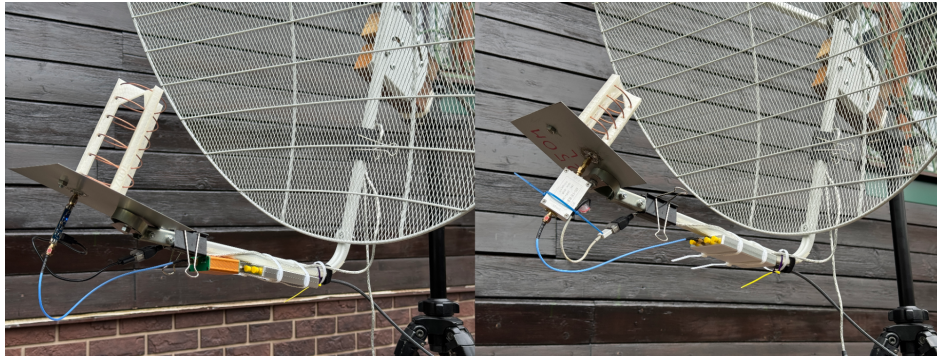


Fig. 2 Photograph of the L-band (left) and S-band (right) receiving chains.

3.2.2 Reference Frequency Stability Assessment 255

A key source of systematic error in Doppler measurements is the instability of the SDR receiver's reference oscillator. As reported by [Bednarz et al. \(2024\)](#), even receivers with specified stability of 0.5–1 ppm exhibit both constant frequency offsets and slow thermal drift. The present experiments confirmed that the frequency readings of both receivers are sensitive to ambient temperature: the best results were obtained under stable thermal conditions, whereas noticeable drift was observed during transient phases such as equipment warm-up.

The presence of a constant frequency offset in both receivers was qualitatively confirmed by briefly observing the downlink signal of the geostationary satellite SBIRS-GEO 1 (SATCAT No. 37481) at 2262.5 MHz. Because the Doppler shift of a geostationary satellite is negligible compared to SDR oscillator instability, any observed frequency offset can be attributed to the systematic error of the receiver reference. This measurement was indicative only and does not constitute a quantitative characterization of oscillator stability.

None of these error sources is eliminated by hardware calibration in the present work. Instead, constant offset is compensated algorithmically through the series-centering operation applied to both the observed and predicted series, as described in Section 3.5.2. This approach removes the dependence of the method on an ultrastable reference oscillator and preserves its operability across a broad class of consumer SDR platforms.

3.3 Doppler Signature Extraction 276

3.3.1 IQ Data Stream and Preprocessing 277

Complex IQ samples are sent to the application from the SDR++ IQ-Exporter module over TCP, with the application acting as client. Samples are transmitted in the

280 `cs16` format (pairs of signed 16-bit integers encoding the I and Q quadrature com-
 281 ponents). The sample rate and center frequency are queried dynamically from the
 282 SDR++ `rigctl` server module via the `rigctl` protocol, eliminating the need for manual
 283 configuration. Incoming samples are accumulated in a fixed-size internal ring buffer
 284 before being passed to subsequent processing stages. No additional filtering or decima-
 285 tion is applied at this stage. The full sample stream is forwarded as-is to the frequency
 286 estimation block.

287 3.3.2 Initial Frequency Estimation via FFT

288 Before the phase-locked loop is started, an optional initial frequency estimate is com-
 289 puted via the Discrete Fourier Transform. This step is intended for signals containing
 290 a distinct carrier and can substantially accelerate PLL lock (Gao et al. 2016). When
 291 enabled, the application accumulates samples for one second and computes the ampli-
 292 tude spectrum via FFT. The spectral bin with the maximum amplitude is taken as
 293 the initial carrier frequency estimate f_0 , which is used to initialise the NCO:

$$f_0 = \arg \max_k |X[k]| \quad (4)$$

294 where $X[k]$ is the complex spectrum of the input sample block. In the event that
 295 this step is skipped, for signals without a distinct carrier where peak finding is not
 296 meaningful for example, the NCO is initialised with zero offset relative to the receiver
 297 center frequency.

298 3.3.3 Signal Tracking via Phase-Locked Loop (PLL)

299 The primary tool for extracting the instantaneous signal frequency is a phase-locked
 300 loop implemented as a C++ module with a Python interface via `pybind11`. Unlike
 301 classical demodulation schemes, this implementation uses the PLL in frequency esti-
 302 mation mode. Here the output is the current estimate of the instantaneous signal

frequency rather than a recovered phase or demodulated data (Guo et al. 2015; Gao et al. 2016).

Before the loop is initialised, the maximum permissible frequency deviation from the center frequency $f_{\max}$ is computed. This is the range within which the PLL can acquire and track the signal:

$$f_{\max} = \left(\frac{c + v_0}{c - v_s} - 1 \right) \cdot f_{\text{sat}} \cdot M \quad (5)$$

For the worst case (maximum Doppler shift), a satellite at 100 km altitude with $v_s \approx 7850$ m/s and an observer moving toward it at the Earth's equatorial rotation speed $v_0 \approx 465$ m/s, this simplifies to:

$$f_{\max} \approx 2.8 \times 10^{-5} \cdot f_{\text{sat}} \cdot M \quad (6)$$

where $M > 1$ is a user-defined capture-range expansion factor that compensates for frequency tuning inaccuracy and reference oscillator instability in both the receiver and transmitter.

The key parameter of a PLL is the loop bandwidth, which determines the trade-off between signal acquisition speed and noise suppression. A wide bandwidth enables fast lock but requires a higher signal-to-noise ratio, whereas a narrow bandwidth provides accurate tracking of a weak signal but slows initial acquisition (Guo et al. 2015). The implementation provides a set of pre-configured bandwidth values that the operator can switch during an observation. The typical strategy in the L and S bands is to use a 2,000Hz bandwidth for initial lock, then narrow to 300Hz for fine tracking. In the VHF and UHF bands, proportionally smaller values were used, which empirically provided stable tracking.

The PLL output is subject to noise from phase jitter and dynamic tracking error, the dominant source of which is thermal noise in the receiving chain (Kaplan and Hegarty 2006).

326 3.3.4 Formation of the Frequency Time Series

327 To suppress noise in the PLL output stream, a one second averaging procedure is
328 applied. All frequency samples f_i arriving in the interval $[N - 0.5, N + 0.5)$, where N
329 is an integer Unix timestamp, are averaged into a single value:

$$\hat{f}(N) = \frac{1}{|S_N|} \sum_{i \in S_N} f_i, \quad S_N = \{i : |t_i - N| < 0.5\} \quad (7)$$

330 The result is a time series $\{(N_j, \hat{f}(N_j))\}$ representing the Doppler signature of the
331 observed signal sampled at one second intervals. This gets fed into the identification
332 algorithm described in Section 3.5.

333 3.4 Generation of Predicted Doppler Trajectories

334 3.4.1 TLE Acquisition and Processing

335 Two-Line Element sets are obtained from several configurable sources. The first is
336 CelesTrak, which provides the active satellite catalog through an open API. The second
337 is ReTLEctor ([ReTLEctor 2026](#)), a lightweight proxy server that caches CelesTrak
338 data to prevent rate-limit violations during bulk downloads. The third is Space-Track,
339 the official catalog of the US Space Forces Command, from which records with an
340 epoch no older than 14 days and no decay date are requested. The fourth is the
341 Mike McCants archive ([Mike McCants' Satellite Tracking TLE ZIP Files 2026](#)), which
342 contains unofficial TLE data for satellites absent from official catalogs but identified
343 through legitimate passive observations (this source does not redistribute classified
344 data). Finally, a user-supplied plain text file of TLE sets allows arbitrary orbital
345 elements to be included optionally.

346 The retrieved data is stored in a local database. When the same satellite appears in
347 multiple sources, the entry with the most recent epoch is kept. The database is updated
348 manually by the operator before each observing session. Local caching removes the

dependency on external API availability at identification time and avoids latency from
real-time network requests.

3.4.2 Orbit Propagation via SGP4 + F&G Functions

Predicted Doppler trajectory generation is performed in two stages to minimise
computational cost.

In the first stage, for each candidate object that has passed the initial filtering, the
SGP4 model (Vallado et al. 2006) is called once to compute the position and velocity
vector at the initial observation epoch t_0 :

$$\mathbf{r}_{\text{sat}}(t_0), \mathbf{v}_{\text{sat}}(t_0) = \text{SGP4}(\text{TLE}, t_0) \quad (8)$$

If the Doppler pre-filter is enabled (Section 3.5.1), the computed state is used to
calculate one predicted Doppler offset at t_0 and immediately reject candidates that do
not pass, without propagating the full orbit. The result is also used for the visibility
filter. These two steps are the last in the filtering chain.

In the second stage, for objects that pass all filters, the orbit is propagated over
the full observation interval using F&G functions (Sharifi and Seif 2011; Seif 2017).
At each epoch $t_0 + \Delta t$ the new state vector is computed independently from the initial
state $(\mathbf{r}_0, \mathbf{v}_0)$:

$$\mathbf{r}(t_0 + \Delta t) = f \mathbf{r}_0 + g \mathbf{v}_0 \quad (9)$$

$$\mathbf{v}(t_0 + \Delta t) = \dot{f} \mathbf{r}_0 + \dot{g} \mathbf{v}_0 \quad (10)$$

The coefficients $f, g, \dot{f}, \dot{g}$ are computed from the change in eccentric anomaly ΔE ,
which is found from the generalized Kepler equation by Newton-Raphson iteration:

$$n \Delta t = \Delta E - \left(1 - \frac{r_0}{a}\right) \sin(\Delta E) + \frac{\mathbf{r}_0 \cdot \mathbf{v}_0}{\sqrt{\mu a}} (1 - \cos(\Delta E)) \quad (11)$$

368 where a is the semi-major axis, $n = \sqrt{\mu/a^3}$ is the mean motion, and $\mu = 3.986004418 \times$
 369 $10^5 \text{ km}^3/\text{s}^2$ is the Earth's standard gravitational parameter. Iteration terminates when
 370 the convergence criterion $|\delta(\Delta E)| < 10^{-12}$ rad is satisfied, or after a maximum of 10
 371 iterations. Once ΔE is found, the coefficients are evaluated as:

$$f = 1 - \frac{a}{r_0}(1 - \cos \Delta E), \quad g = \Delta t - \sqrt{\frac{a^3}{\mu}}(\Delta E - \sin \Delta E) \quad (12)$$

372

$$\dot{f} = -\frac{\sqrt{\mu a}}{r r_0} \sin \Delta E, \quad \dot{g} = 1 - \frac{a}{r}(1 - \cos \Delta E) \quad (13)$$

373 To reduce computational cost, satellite and observer positions are precomputed and
 374 cached for 1,000 consecutive seconds starting from t_0 , which covers the typical duration
 375 of observable LEO passes. When the Doppler shift at a specific epoch is requested,
 376 the corresponding state vectors are retrieved from the cache without recomputation.

377 3.4.3 Observer Motion Model

378 The precise observer position in the GCRS frame at the initial epoch t_0 is computed
 379 using the Skyfield library, accounting for Earth's precession and nutation. For all
 380 subsequent epochs $t = t_0 + \Delta t$, the observer coordinates are obtained by rotating the
 381 ITRS vector by the angle corresponding to elapsed time:

$$\mathbf{r}_{\text{obs}}(t) = \mathbf{R}_z(\omega_{\oplus} \Delta t) \mathbf{R}_{\text{ITRS} \rightarrow \text{GCRS}}(t_0) \mathbf{r}_{\text{ITRS}} \quad (14)$$

382 where $\omega_{\oplus} = 7.2921150 \times 10^{-5} \text{ rad/s}$ is the Earth's rotation rate. The observer velocity
 383 in the GCRS frame is:

$$\mathbf{v}_{\text{obs}} = \boldsymbol{\omega}_{\oplus} \times \mathbf{r}_{\text{obs}} = \begin{bmatrix} -\omega_{\oplus} y \\ \omega_{\oplus} x \\ 0 \end{bmatrix} \quad (15)$$

This approximation neglects small variations in Earth’s rotation axis orientation 384
over the observation interval, which is well justified for typical LEO pass durations of 385
10-15 minutes. 386

3.4.4 Computation of the Predicted Doppler Shift 387

At each observation epoch the predicted Doppler shift is computed from the projection 388
of the relative velocity vector onto the line of sight. The unit line of sight vector is: 389

$$\hat{\boldsymbol{\rho}} = \frac{\mathbf{r}_{\text{sat}} - \mathbf{r}_{\text{obs}}}{|\mathbf{r}_{\text{sat}} - \mathbf{r}_{\text{obs}}|} \quad (16)$$

The radial approach velocity along the line of sight is: 390

$$\dot{\rho} = (\mathbf{v}_{\text{obs}} - \mathbf{v}_{\text{sat}}) \cdot \hat{\boldsymbol{\rho}} \quad (17)$$

where a positive $\dot{\rho}$ corresponds to mutual approach. Using the first-order approxima- 391
tion from Section 2.1, the predicted observed frequency is: 392

$$f_{\text{pred}} = f_{\text{sat}} \left(1 + \frac{\dot{\rho}}{c} \right) \quad (18)$$

Since the exact transmitter carrier frequency f_{sat} is generally unknown, the abso- 393
lute values of f_{pred} are not used directly in the matching algorithm. Instead, both the 394
observed and predicted series are centered by subtracting their respective means, as 395
described in Section 3.5.2. 396

3.5 Satellite Identification Algorithm 397

3.5.1 Prefiltering of Candidate Satellites 398

The TLE catalog currently contains approximately 15,000 objects, for which full 399
orbit propagation is impractical. To reduce the candidate set to a manageable size, 400

401 sequential multi-stage filtering is applied. The seven filters are ordered by increasing
402 computational cost.

403 The first five filters operate directly on TLE fields without invoking the propaga-
404 tion model. The *debris filter* rejects objects whose name contains the substrings *deb*,
405 *rb*, or *r/b* (case insensitive), eliminating known debris and rocket bodies. The *epoch*
406 *filter* rejects ephemerides older than a configurable threshold (14 days by default), as
407 propagating such old elements with the SGP4 model yields unacceptable prediction
408 accuracy. The *constellation filter* excludes satellites belonging to mega-constellations
409 (by default Starlink and OneWeb), as their signals are largely inaccessible to passive
410 reception in the bands under study. The *GEO and high-orbit filter* rejects objects with
411 mean motion $n < 6$ revolutions per day, a threshold chosen empirically because the
412 expected Doppler shift for such orbits is substantially lower than for LEO objects and
413 carries little to no discriminating information over short observation intervals. The
414 *high eccentricity filter* excludes objects with eccentricity $e > 0.25$, a threshold cho-
415 sen empirically as a compromise between reducing the candidate count and retaining
416 observable objects.

417 For the remaining objects, SGP4 is called once to compute the position and velocity
418 vector at the initial observation epoch t_0 . The result is shared by the two subsequent
419 filters. The *visibility filter* rejects satellites with elevation below the horizon $\theta_{\text{el}} <$
420 θ_{min} (default: 0°) at t_0 , restricting the candidate set to objects that were above the
421 horizon at the start of the observation. Finally, the *Doppler pre-filter* rejects satellites
422 whose predicted Doppler shift at t_0 differs from the observed value by more than a
423 configurable threshold ε :

$$|\Delta f_{\text{pred}}(t_0) - \Delta f_{\text{obs}}(t_0)| > \varepsilon \quad (19)$$

This particular filter is most effective when the center frequency of the signal is not known precisely. In that case, its use is not recommended, as it risks rejecting the true candidate.

3.5.2 Trajectory Normalisation

Direct comparison of the observed and predicted frequency series is not possible for several reasons. First, the exact transmitter carrier frequency f_{sat} is generally unknown, introducing a constant offset between the series. Second, reference oscillator instability in the SDR receiver adds a further systematic offset and slow drift. The constant offset is removed by centering: the mean of each series is subtracted from it:

$$\tilde{f}_{\text{obs},i} = f_{\text{obs},i} - \bar{f}_{\text{obs}} \quad (20)$$

$$\tilde{f}_{\text{pred},i} = f_{\text{pred},i} - \bar{f}_{\text{pred}} \quad (21)$$

The centered series $\tilde{f}_{\text{obs}}$ and $\tilde{f}_{\text{pred}}$ retain only information about the shape of the Doppler curve, which is invariant to constant offsets of any origin. The operation also makes the method robust to imprecise receiver tuning. Formally, assuming:

$$f_{\text{obs}}(t) = f_D(t) + b + \epsilon(t) \quad (22)$$

where $f_D(t)$ is the Doppler component, b is the constant bias (unknown transmitter frequency combined with the SDR local oscillator offset), and $\epsilon(t)$ is noise, subtracting the mean gives:

$$\tilde{f}_{\text{obs}}(t) = f_D(t) - \bar{f}_D + \epsilon(t) - \bar{\epsilon} \quad (23)$$

because the constant term cancels exactly: $b - \bar{b} = 0$.

441 3.5.3 Matching Metric

442 The proximity between the observed and predicted Doppler signatures is measured by
443 the root mean square error (RMSE) of the centered series:

$$\text{RMSE} = \sqrt{\frac{1}{N} \sum_{i=1}^N \left(\tilde{f}_{\text{obs},i} - \tilde{f}_{\text{pred},i} \right)^2} \quad (24)$$

444 where N is the number of timestamps common to both series. RMSE was chosen
445 because the Doppler trajectories are time-synchronised and sampled simultaneously,
446 making amplitude domain deviation the primary discriminating feature. Candidates
447 are ranked in ascending order of RMSE, with the lowest value corresponding to the
448 best match. Across the observations collected in this study, the RMSE of the correct
449 object was typically several times lower than that of the second-ranked candidate,
450 with the gap widening as observation duration increased.

451 3.5.4 Computational Complexity of the Algorithm

452 To quantify pipeline performance, 10 random observer locations and 10 random epochs
453 were combined into 100 test cases, each of which was processed by the full pipeline with
454 synthetic data. Mean execution times for the principal stages are shown in Figure 3.

455 Without the pre-filter, orbit propagation is the dominant stage (78.7% of total
456 time), driven by Newton-Raphson iteration of the Kepler equation for each of ~ 177
457 candidate satellites across 1,000 time points. Enabling the Doppler pre-filter reduces
458 the mean number of candidates reaching the F&G propagation stage from 176.6 to
459 4.7, yielding a 32-fold speedup of the propagation stage and a 4.5-fold speedup of the
460 overall pipeline. The number of remaining candidates after each filtering step is shown
461 in Figure 4.

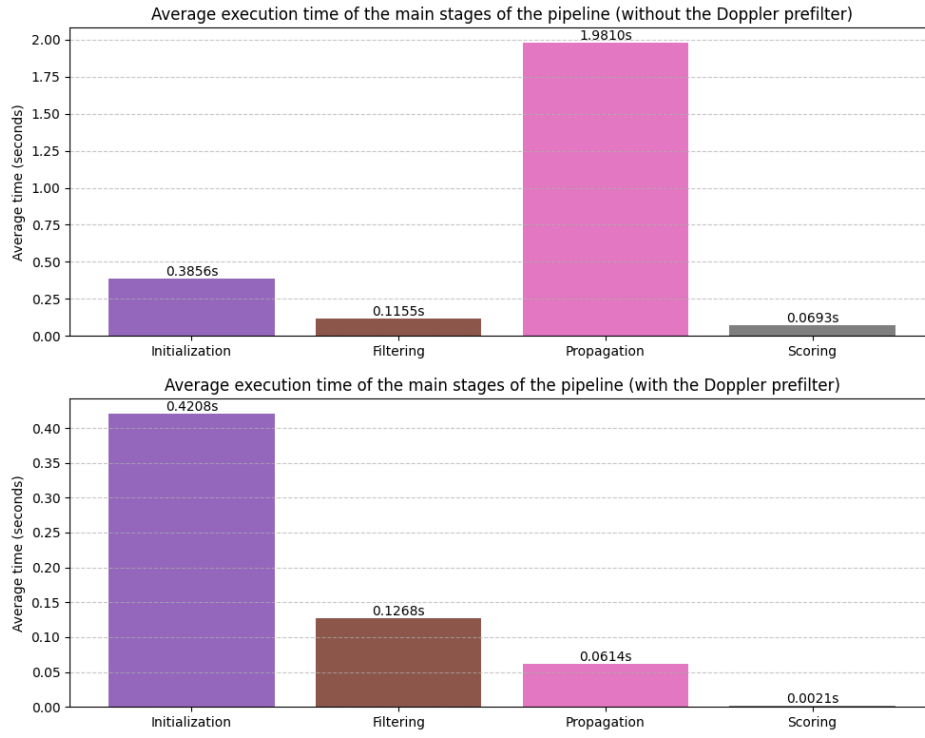


Fig. 3 Execution time breakdown by pipeline stage, with and without the Doppler pre-filter.

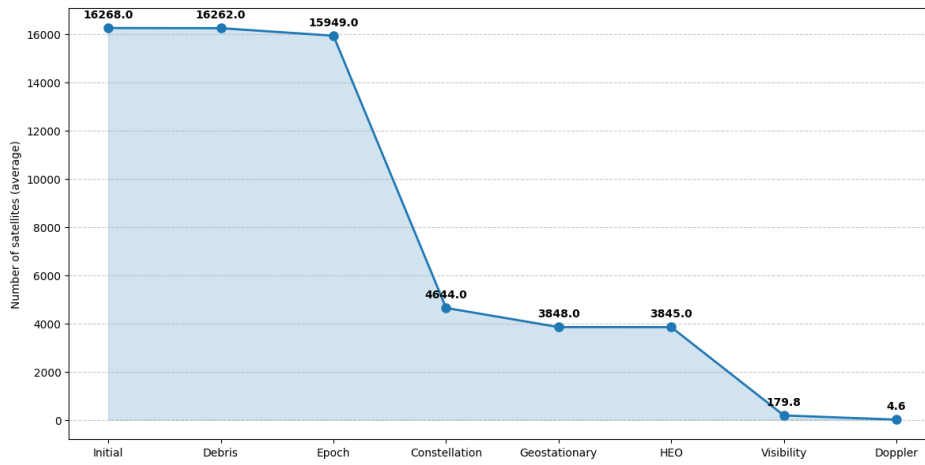


Fig. 4 Candidate count at each stage of the filtering pipeline.

462 4 Experimental Study

463 4.1 Experimental Methodology

464 Observations were conducted near the town of Aprelevka, Naro-Fominsk District,
465 Moscow Region (approximately 55.5° N, 37.1° E), over several weeks in 2026, with a
466 total active observation time of approximately 20 hours. Both receivers described in
467 Section 3.2.1 were used depending on equipment availability at the time of observation.
468 Results did not differ appreciably between receivers.

469 Observations were conducted primarily in the evening, most often around sunset,
470 because of the high density of passes by sun-synchronous satellites during that period.
471 Candidate signals were identified on an opportunistic basis: the operator monitored
472 a live spectrogram in SDR++ looking for unfamiliar signals and checked each one
473 for a pronounced Doppler shift. It appeared as the characteristic leftward drift of
474 spectral lines over time on the FFT plot. Signals showing no visible Doppler shift were
475 disregarded as geostationary or terrestrial.

476 Before each observing session the operator manually updated the local TLE
477 database from CelesTrak, ReTLEctor, and the Mike McCants archive. The last
478 source was added after several early observations yielded no identification because the
479 satellites in question were absent from the official catalogs.

480 Once a candidate signal was detected, the tripod-mounted antenna was pointed
481 at the source manually. In the UHF, L, and S bands, tracking throughout the pass
482 was maintained by continuously adjusting the antenna direction against the signal
483 level on the FFT display, with a drop in amplitude indicating pointing error. In the
484 VHF band a fixed V-dipole antenna was used without mechanical tracking. The center
485 frequency of the IQ Exporter in SDR++ was set approximately to the observed signal
486 with a downward correction for Doppler shift: since the signal frequency decreases on
487 the descending portion of the pass, the tuning was placed slightly below the observed
488 carrier. The FFT-based initial frequency estimation was enabled where needed. The

PLL capture bandwidth was set to 1,000-2,000 Hz for initial lock, then narrowed to 300 Hz for fine tracking in the L and S bands; proportionally smaller values were used at lower frequencies.

A typical pass lasted approximately 5 minutes, though recorded passes ranged from 50 seconds to 10 minutes depending on maximum elevation and observing conditions. The identification algorithm described in Section 3.5 was run live during each pass.

Identification correctness was verified in two stages. First, the antenna pointing direction at the time of observation was compared against the predicted azimuth and elevation of the identified satellite in GPredict, where agreement confirmed the plausibility of the result. Second, the next pass of the identified satellite was predicted from its TLE and observed independently. Successful tracking with a consistent Doppler curve served as the final confirmation. All 28 repeat observations were successful. Cases in which the algorithm did not produce a confident identification are discussed below.

4.2 Satellite Identification Results

The experimental dataset comprises 28 successful identifications of LEO satellites across the VHF, UHF, L, and S bands: 2 observations in VHF, 1 in UHF, 3 in L, and 22 in S. In every case identification was performed from a single pass, without external receiver frequency calibration and without activating the Doppler pre-filter. Systematic bias was removed solely through the series centering procedure described in Section 3.5.2.

In all observations the correct satellite ranked first by the RMSE metric. Results for a representative sample from each band are given in Table 1.

Across all bands, the RMSE of the true object is substantially lower than that of the nearest false candidate. In the S band, where the largest number of observations was accumulated ($n = 22$), the mean ratio $\text{RMSE}_1/\text{RMSE}_2$ was 0.073, while the mean ratio $\text{RMSE}_2/\text{RMSE}_3$ was 0.732, indicating a sharply defined minimum of the error

Table 1 Identification results for a representative sample of satellites.

Satellite	SATCAT No.	Frequency (MHz)	RMSE ₁ (Hz)	RMSE ₂ (Hz)
METEOR-M2 4	59051	137.9	4.39	45.22
IONOSFERA-M 3	64876	150	8.25	174.90
IONOSFERA-M 4	64877	400	5.49	509.64
SARAL	39086	1698.4	50.20	773.46
METEOR-M2 3 (TX1)	57166	1700	40.70	460.24
METEOR-M2 3 (TX2)	57166	1544.5	28.59	1032.61
FENGYUN 3F	57490	2264.65	28.28	1928.28
HINODE (SOLAR-B)	29479	2256.22	24.89	1525.86
METOP-B	38771	2230	75.24	690.29
PROBA-2	36037	2235	268.87	1039.19

function at the correct candidate. A similar pattern holds in the L band ($n = 3$): mean $\text{RMSE}_1/\text{RMSE}_2 = 0.060$ against $\text{RMSE}_2/\text{RMSE}_3 = 0.664$. Averaging across the VHF and UHF bands is not meaningful given the small sample sizes. Individual values for those cases are listed directly in Table 1. The table shows that even when the absolute Doppler shift is small at lower frequencies, the shape of the trajectory remains sufficient for confident discrimination between spacecraft.

The largest number of observations was made in the S band, due to the sheer number of available signals and the high discriminating power of their doppler signatures. For FENGYUN 3F, for instance, the gap between RMSE_1 and RMSE_2 exceeds two orders of magnitude. Results in the L and UHF bands are comparable in quality. In the S band, four satellites of the CENTISPACE constellation were additionally identified on different frequencies, demonstrating that the method generalizes across multiple signals within a single constellation.

A notable case is the observation of METOP-B, which was successfully identified at the beginning of its pass during the initial testing and development of the application. Later in the pass, when the spacecraft’s coherent transponder locked onto an uplink from the ground station, the observed downlink acquired a double Doppler shift: the uplink experiences Doppler on the ground-to-space path, and the coherently retransmitted downlink experiences Doppler again on the space-to-ground

path (Jet Propulsion Laboratory 2019). This resulted in an abrupt change in the observed Doppler trajectory, causing the identification algorithm to fail. The case clearly illustrates one of the method’s limitations, discussed below.

The effect of TLE age on identification accuracy is illustrated by PROBA-2, for which $RMSE_1$ was 268.87 Hz, which is substantially higher than the values typical of other observations due to the use of outdated ephemerides. Nevertheless, the correct object retained first place in the ranking with $RMSE_2 = 1039.19$ Hz, indicating robustness of the method to moderate ephemeris errors. A corresponding example output is shown in Figure 6.

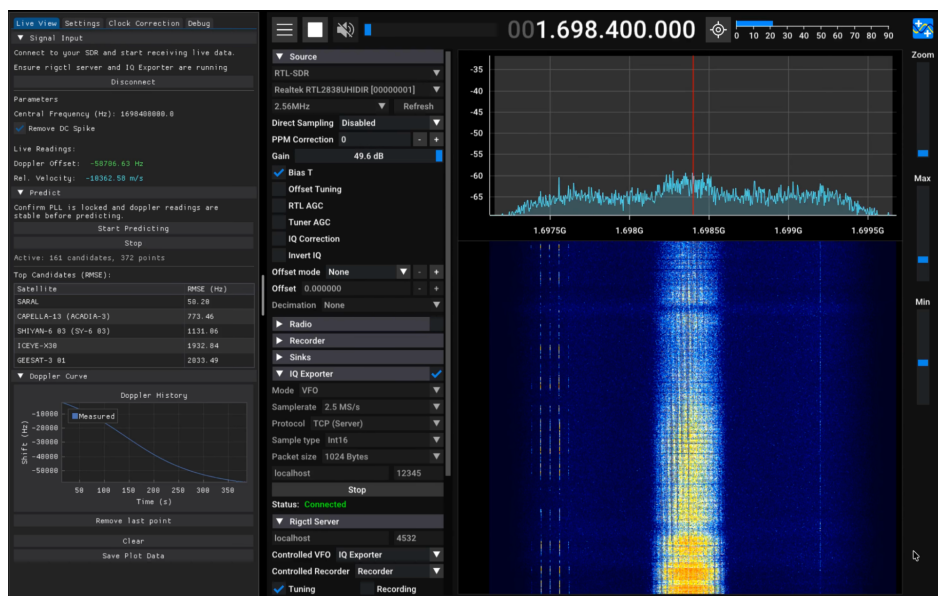


Fig. 5 Identification of SARAL in the L band.

Three characteristic failure modes were identified during the observations. The first is coherent transponder operation, illustrated above by the METOP-B case. The second is the absence of a satellite from certain TLE catalogs: the most notable examples are the NOSS-3 satellites, which do not appear in official open sources but are present in the Mike McCants archive. In such cases correct identification is impossible without

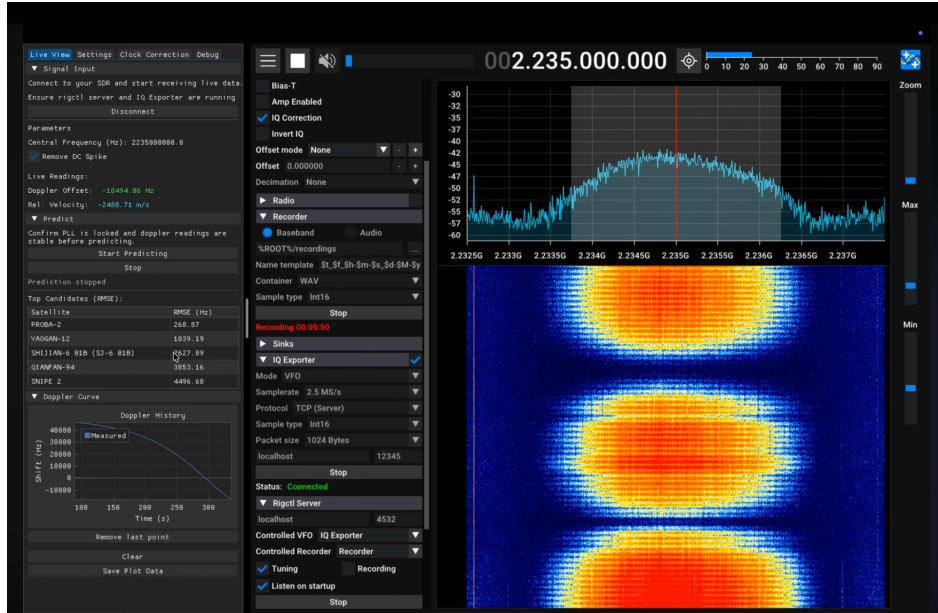


Fig. 6 Identification of PROBA-2 with outdated TLE data.

including that ephemeris source. The third failure mode is insufficient signal-to-noise ratio: under deep signal fades the PLL loses lock, which corrupts the frequency time series. Identification is also degraded for short transmissions, namely brief data-dump sessions or burst-mode transmissions, where the observed Doppler trajectory is too short for confident discrimination between candidates.

Taken together, the results confirm that passive satellite identification from a single pass is achievable with consumer grade SDR receivers across a wide frequency range, from VHF through S band, without external frequency calibration and without precise knowledge of the signal carrier frequency.

5 Discussion and Conclusion 557

5.1 Main Findings 558

This work presents a method for passive satellite identification from the Doppler signature of a single pass, developed and experimentally validated in full. All objectives stated in the introduction have been addressed. 559 560 561

A Doppler signature extraction method was developed based on a phase-locked loop implemented as a high-throughput processing module. The validity of the first-order approximation relating Doppler shift to relative velocity was established for LEO satellite observation scenarios. A computationally efficient approach to generating predicted Doppler trajectories was proposed, combining a single SGP4 call with subsequent orbit propagation via F&G functions. A trajectory matching algorithm was developed based on the RMSE metric with mean-subtraction normalisation, which simultaneously compensates for the unknown transmitter carrier frequency, the constant offset of the receiver reference oscillator, and its slow drift. The compensation procedure was thus confirmed to work without external frequency references or GPS-disciplined oscillators. 562 563 564 565 566 567 568 569 570 571 572

The method was experimentally validated on 28 satellites across the VHF, UHF, L, and S bands using consumer-grade SDR receivers. In every case the correct spacecraft ranked first by RMSE with a clear margin over the nearest false candidate. 573 574 575

The proposed method has no direct counterpart among the approaches reviewed in the literature. Its implementation on consumer SDR hardware makes it broadly accessible for applications in radio astronomy, post-deployment identification of small satellites, and radio-frequency spectrum monitoring. 576 577 578 579

5.2 Directions for Further Development 580

The most immediate avenue for development is automation of the receiving chain through integration of the antenna with a motorised rotator driven by predicted 581 582

583 orbital elements or signal to noise ratio of the unidentified signal in real time. This
584 would replace manual satellite tracking with a fully autonomous observation mode
585 and remove the dependence of signal quality on operator input.

586 A significant functional extension would be support for burst transmissions. The
587 current implementation assumes a continuous signal with a stable carrier suitable for
588 PLL tracking. Adapting the method to short burst transmissions would require an
589 alternative frequency estimation block - for instance, frame by frame FFT followed by
590 aggregation of the individual frequency estimates into a single Doppler curve.

591 A promising direction for improving identification robustness is the inclusion of
592 antenna pointing angles as an additional observable. If the antenna direction corre-
593 sponding to the signal maximum is recorded throughout a pass, the resulting angular
594 trajectory can serve as an independent constraint during candidate matching: satel-
595 lites whose predicted angular trajectory diverges from the observed one can be rejected
596 even when their Doppler RMSE is low. Combining Doppler and angular observables
597 could substantially reduce the probability of false identification in high orbital density
598 environments.

599 **List of abbreviations.**

600 *ADS-B* Automatic Dependent Surveillance-Broadcast
601 *API* Application Programming Interface
602 *CCSDS* Consultative Committee for Space Data Systems
603 *FFT* Fast Fourier Transform
604 *GCRS* Geocentric Celestial Reference System
605 *GEO* Geostationary Earth Orbit
606 *GPS* Global Positioning System
607 *GPSDO* GPS-Disciplined Oscillator
608 *IQ* In-phase and Quadrature
609 *ITRS* International Terrestrial Reference System

<i>LEO</i> Low Earth Orbit	610
<i>LHCP</i> Left-Hand Circular Polarisation	611
<i>LNA</i> Low-Noise Amplifier	612
<i>NCO</i> Numerically Controlled Oscillator	613
<i>NORAD</i> North American Aerospace Defense Command	614
<i>OMM</i> Orbit Mean-Element Message	615
<i>PLL</i> Phase-Locked Loop	616
<i>RFF</i> Radio-Frequency Fingerprinting	617
<i>RHCP</i> Right-Hand Circular Polarisation	618
<i>RMSE</i> Root Mean Square Error	619
<i>SATCAT</i> Satellite Catalog Number	620
<i>SAW</i> Surface Acoustic Wave	621
<i>SDR</i> Software-Defined Radio	622
<i>SGP4</i> Simplified General Perturbations Model 4	623
<i>SSN</i> Space Surveillance Network	624
<i>TCP</i> Transmission Control Protocol	625
<i>TCXO</i> Temperature-Compensated Crystal Oscillator	626
<i>TLE</i> Two-Line Element (set)	627
<i>UHF</i> Ultra-High Frequency	628
<i>USRP</i> Universal Software Radio Peripheral	629
<i>VHF</i> Very-High Frequency	630
<i>VFO</i> Variable Frequency Oscillator	631
Declarations.	632

Availability of data and materials. The source code of the Dopp- 633
 lerguesser system developed during this study is publicly available at 634
<https://github.com/BUSH222/dopplerguesser> (Vtorov 2026). The software is released 635
 under the MIT License. The raw IQ recordings, frequency time series, and screen 636

capture files supporting the conclusions of this article are available from the
corresponding author on reasonable request.

Competing interests. The author declares that he has no competing interests.

Funding. Not applicable.

Authors' contributions. Fedor Ivanovich Vtorov devised the method, implemented the software, conducted all observations, performed the analysis, and wrote the manuscript.

Acknowledgements. Not applicable.

References

Bednarz K, Wojtuń J, Kelner JM, et al (2024) Frequency instability impact of low-cost sdrs on doppler-based localization accuracy. *Sensors* 24(4). URL <https://www.mdpi.com/1424-8220/24/4/1053>

Calculator HA (2024) Helical antenna calculator. URL <https://sgcderek.github.io/tools/helix-calc.html>

Deng R, Qin H, Zhang Y (2024) Non-cooperative leo satellite orbit determination using single station for space-based opportunistic positioning. *Remote Sensing* 16(5). <https://doi.org/10.3390/rs16050912>

Gao X, Li Y, Bao J (2016) Efficient carrier acquisition and tracking for high dynamic and weak satellite signals. *Journal of Communications* 11:644–652. <https://doi.org/10.12720/jcm.11.7.644-652>

Guo W, Lin T, Niu X, et al (2015) Design and performance evaluation of a dual antenna joint carrier tracking loop. *Sensors* 15(10):25399–25415. <https://doi.org/10.3390/s151025399>, URL <https://www.mdpi.com/1424-8220/15/10/25399>

Jet Propulsion Laboratory (2019) Doppler tracking. DSN Telecommunications Link 660
Design Handbook 810-005, Module 202, Rev. C, NASA/JPL, Deep Space Network, 661
URL <https://deepspace.jpl.nasa.gov/dsndocs/810-005/202/202C.pdf> 662

Kaplan ED, Hegarty CJ (2006) Understanding GPS: Principles and Applications, 2nd 663
edn. Artech House 664

Kelso TS (1997) Space surveillance. <https://celestrak.org/columns/v04n01/>, accessed: 665
2026-07-01 666

Kraus JD, Marhefka RJ (2002) Antennas for All Applications, 3rd edn. McGraw-Hill, 667
New York 668

Mike McCants' Satellite Tracking TLE ZIP Files (2026) Mike mccants' satellite 669
tracking tle zip files. <https://mmccants.org/tles/>, accessed: 2026-07-01 670

Oligeri G, Raponi S, Sciancalepore S, et al (2020) Past-ai: Physical-layer authenti- 671
cation of satellite transmitters via deep learning. URL <https://arxiv.org/abs/2010.05470>, 2010.05470 672
673

Phillion D, Pertica A, Fasnfest B, et al (2014) Large-scale simulation of a process 674
for cataloguing small orbital debris. Technical Report LLNL-TR-648313, Lawrence 675
Livermore National Laboratory, URL <https://www.osti.gov/servlets/purl/1119960> 676

ReTLEctor (2026) Retlector. <https://retlector.eu/>, accessed: 2026-07-01 677

Richmond D, Raichle K (2018) Doppler curves in satellite tracking and characteriza- 678
tion. In: Proceedings of the AMOS Technical Conference, Maui 679

Rouma A (2021) Sdr++. <https://www.sdrpp.org/>, cross-platform and open source 680
software-defined radio software. Accessed: 2026-07-01 681

682 Seif MR (2017) The generalized f and g series for the satellite orbit propagation. Earth
683 Observation and Geomatics Engineering 1(2):71–81

684 SeLNA-v1 (2026) Selna-v1. URL <https://github.com/seler1500/SeLNA-v1>

685 Sharifi MA, Seif MR (2011) Dynamic orbit propagation in a gravitational field of an
686 inhomogeneous attractive body using the lagrange coefficients. Advances in Space
687 Research 48(5):904–913. <https://doi.org/https://doi.org/10.1016/j.asr.2011.04.021>,
688 URL <https://www.sciencedirect.com/science/article/pii/S0273117711002821>

689 Skinner MA, Coletti M, Voss MC, et al (2022) Mitigating cubesat confusion: Results
690 of in-flight technical demonstrations of candidate tracking and identification tech-
691 nologies. Journal of Space Safety Engineering 9(3):403–409. <https://doi.org/https://doi.org/10.1016/j.jsse.2022.05.008>, URL [https://www.sciencedirect.com/science/](https://www.sciencedirect.com/science/article/pii/S246889672200060X)
692 [article/pii/S246889672200060X](https://www.sciencedirect.com/science/article/pii/S246889672200060X)

694 Solenthaler C, Smailes J, Strohmeier M (2025) Orbid: Identifying orbcomm satellite
695 rf fingerprints. NDSS SpaceSec Workshop, URL <https://arxiv.org/abs/2503.02118>,
696 [2503.02118](https://arxiv.org/abs/2503.02118)

697 for Space Data Systems CC (2009) Orbit Data Messages, 2nd edn. No. CCSDS 502.0-
698 B-2 in Recommendation for Space Data System Standards, CCSDS, URL https://www.nasa.gov/wp-content/uploads/2017/12/orbit_data_messages.pdf

700 Spiridonov A, Saetchnikov V, Ushakov D, et al (2021) Small satellite orbit determi-
701 nation methods based on the doppler measurements by belarusian state university
702 ground station. IEEE Journal on Miniaturization for Air and Space Systems 2:59 –
703 66. <https://doi.org/10.1109/JMASS.2020.3047456>

704 Vallado DA, Crawford P, Hujsak R, et al (2006) Revisiting spacetrack report #3. In:
705 AIAA/AAS Astrodynamics Specialist Conference, aIAA-2006-6753

- Vtorov FI (2026) Dopplerguesser. <https://github.com/BUSH222/dopplerguesser>, 706
source code of the Dopplerguesser system developed during this study. Accessed: 707
2026-07-01 708
- Yang X, Zhi Q, Yang Y, et al (2026) An attempt to search for unintended electromag- 709
netic radiation from starlink satellites with the 21 centimeter array: Methodology 710
and rfi characterization. URL <https://arxiv.org/abs/2603.07631>, 2603.07631 711