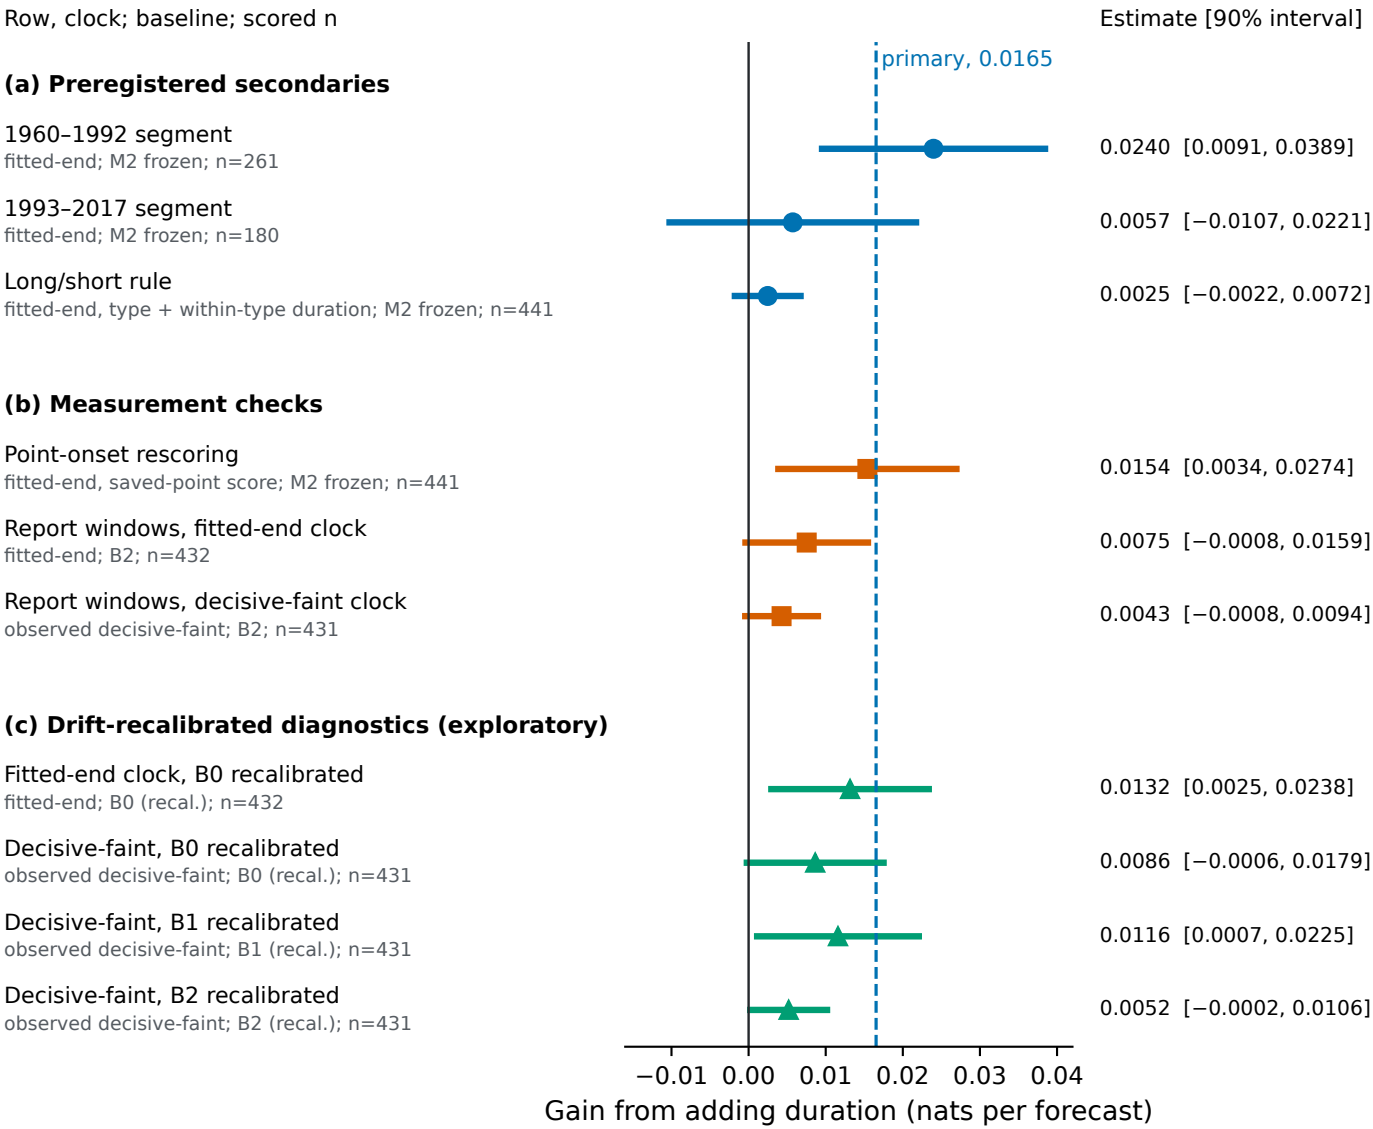
Row, clock; baseline; scored n
Estimate [90% interval]
primary, 0.0165
(a) Preregistered secondaries
1960–1992 segment
fitted-end; M2 frozen; n=261
0.0240 [0.0091, 0.0389]
1993–2017 segment
fitted-end; M2 frozen; n=180
0.0057 [−0.0107, 0.0221]
Long/short rule
fitted-end, type + within-type duration; M2 frozen; n=441
0.0025 [−0.0022, 0.0072]
(b) Measurement checks
Point-onset rescoring
fitted-end, saved-point score; M2 frozen; n=441
0.0154 [0.0034, 0.0274]
Report windows, fitted-end clock
fitted-end; B2; n=432
0.0075 [−0.0008, 0.0159]
Report windows, decisive-faint clock
observed decisive-faint; B2; n=431
0.0043 [−0.0008, 0.0094]
(c) Drift-recalibrated diagnostics (exploratory)
Fitted-end clock, B0 recalibrated
fitted-end; B0 (recal.); n=432
0.0132 [0.0025, 0.0238]
Decisive-faint, B0 recalibrated
observed decisive-faint; B0 (recal.); n=431
0.0086 [−0.0006, 0.0179]
Decisive-faint, B1 recalibrated
observed decisive-faint; B1 (recal.); n=431
0.0116 [0.0007, 0.0225]
Decisive-faint, B2 recalibrated
observed decisive-faint; B2 (recal.); n=431
0.0052 [−0.0002, 0.0106]
−0.01
0.00
0.01
0.02
0.03
0.04
Gain from adding duration (nats per forecast)