


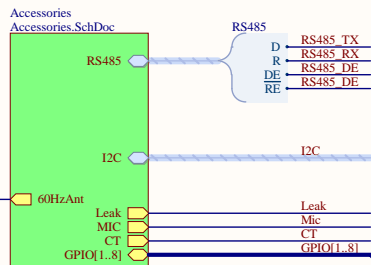
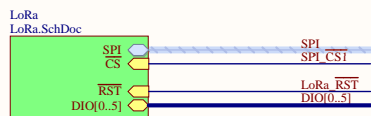
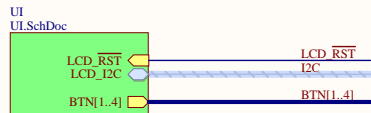
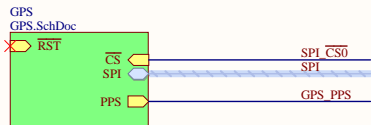


Peripherals Mapping
U0(UART 0) - Debug/Prgrm
U2(UART 2) - RS485 CEA2045
VSP1(SPI3) - GPS and LCD (can do UART to GPS if desired)

Naming The Power Nets




Need low for Download Boot mode
and used to reset IO Expander on watchdog

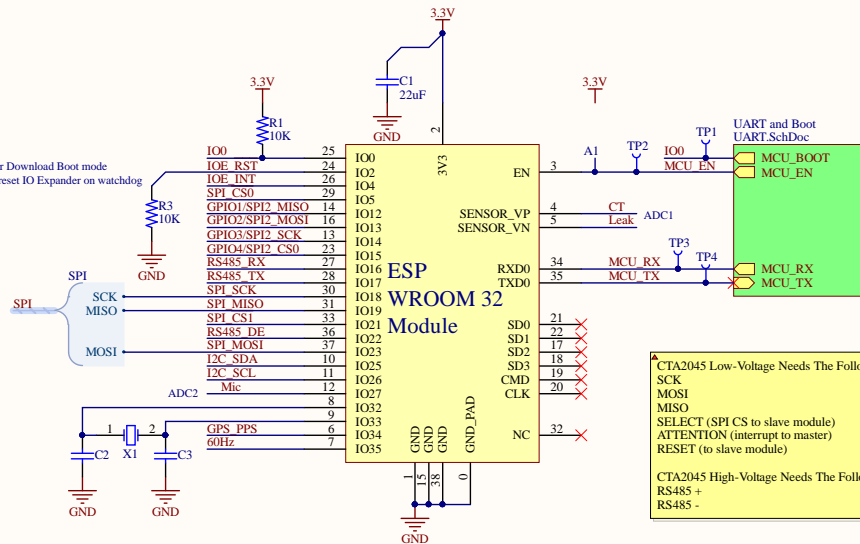





CTA2045 Low-Voltage Needs The Following:
SCK
MOSI
MISO
SELECT (SPI CS to slave module)
ATTENTION (interrupt to master)
RESET (to slave module)

CTA2045 High-Voltage Needs The Following:
RS485 +
RS485 -

TODO:
* Replace Crystal and crystal caps with own part - check crystal caps values

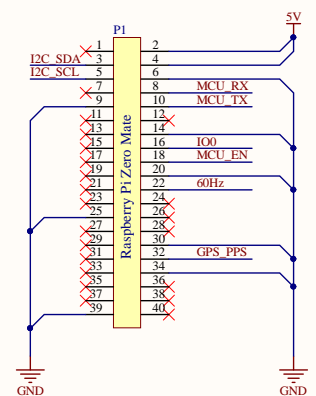


IO Expander

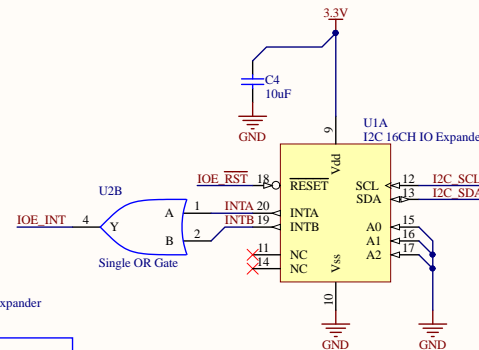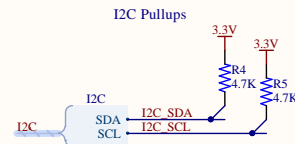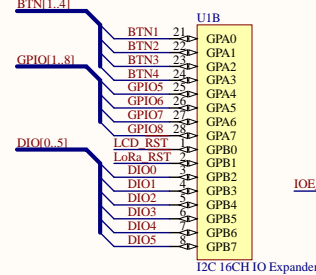

Title		
Main		
Size	Number	Revision
B		1.1
Date:	3/6/2018	Sheet of
File:	C:\Users\Main\SchDoc	Drawn By: Craig Hesling


Main Board Interface

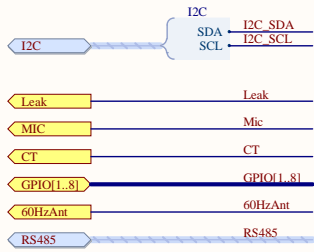

The accessories interface was designed around being able to run a CTA2045 Low Power interface (SPI + 2 IO pins) and two relays.


Other potentially useful protocols, like I2C, RS485, and sensor controls have also been exposed into the header.

Current Transformer

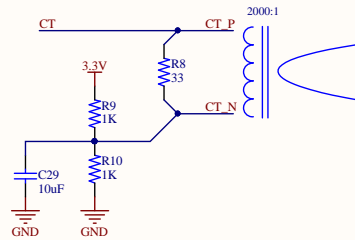


Leak Detection Cable

The cable seems to operate between 1 to 5MOhms
Note that it goes high-Z when completely dry


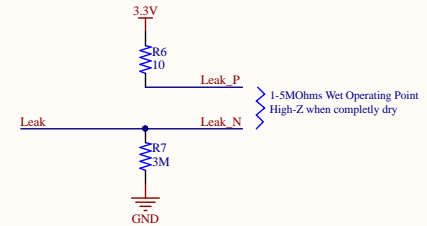


Accessory Ports




Cannot open file
E:\Altium\gridballast(Hardware\Cont
roller\Info\CAT5-RJ45-Pairs.png

Cable twisted pairs graphic from
<http://T1huji.free.fr/rj45.htm>

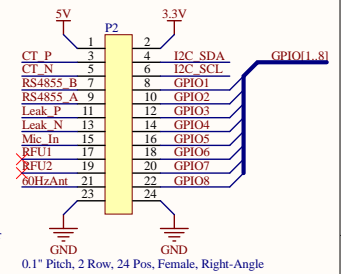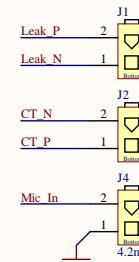


0.1" Pitch, 2 Row, 24 Pos, Female, Right-Angle

RS485 Transceiver

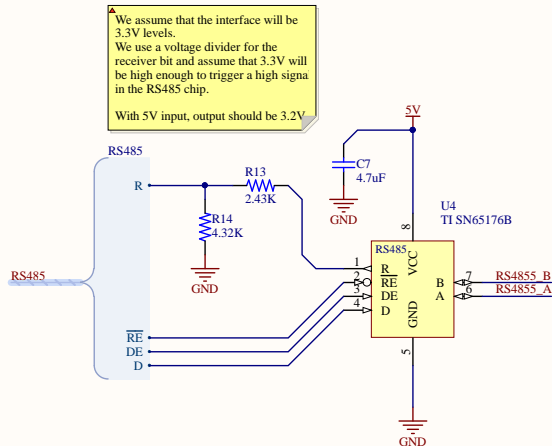


Microphone Amplifier and DC Bias

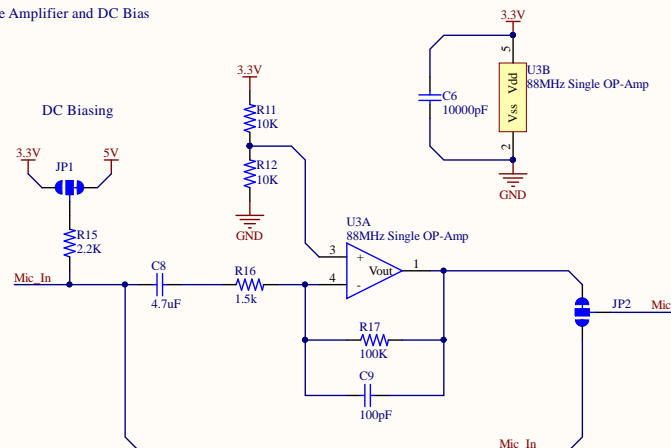

JASON COHN/REUTERS



Title			
Accessories			
Size B	Number	Revision	
		1.1	
Date:	3/6/2018	Sheet	of
File:	C:\Users\...\Accessories.SchDoc	Drawn By:	Craig Hesling

A

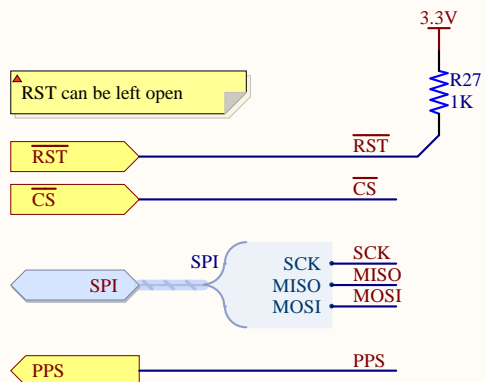

B

▲ V_BCKP:
vcc = Unused
Can use as coin
cell battery backup

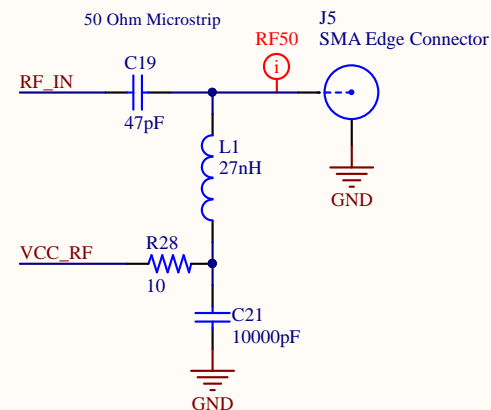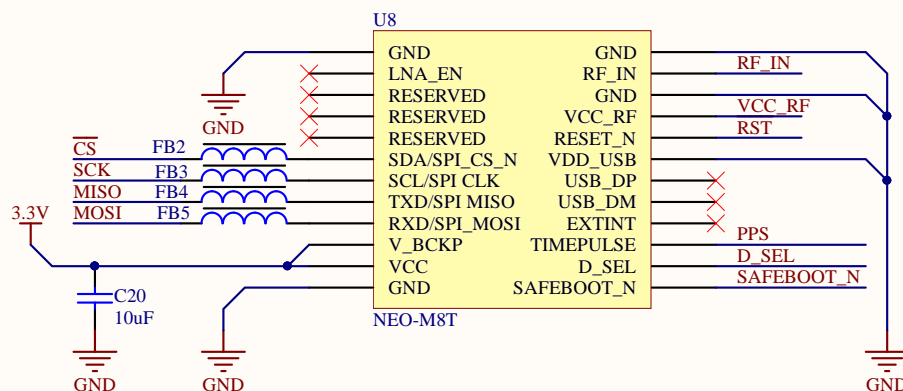


C

D

▲ D_SEL:
open = UART/DDC
low = SPI

SAFEBOOT_N:
open = Unused
(do not pull low on boot)

VDD_USB:
LDO'ed 3.3V = USB Active
gnd = Unused

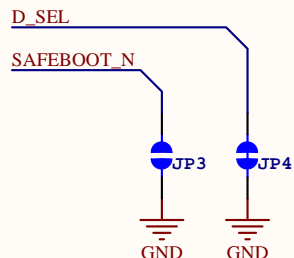


Title GPS		
Size A	Number	Revision 1
Date:	3/6/2018	Sheet of
File:	C:\Users\...\GPS.SchDoc	Drawn By: Craig Hesling

A


B

C


D

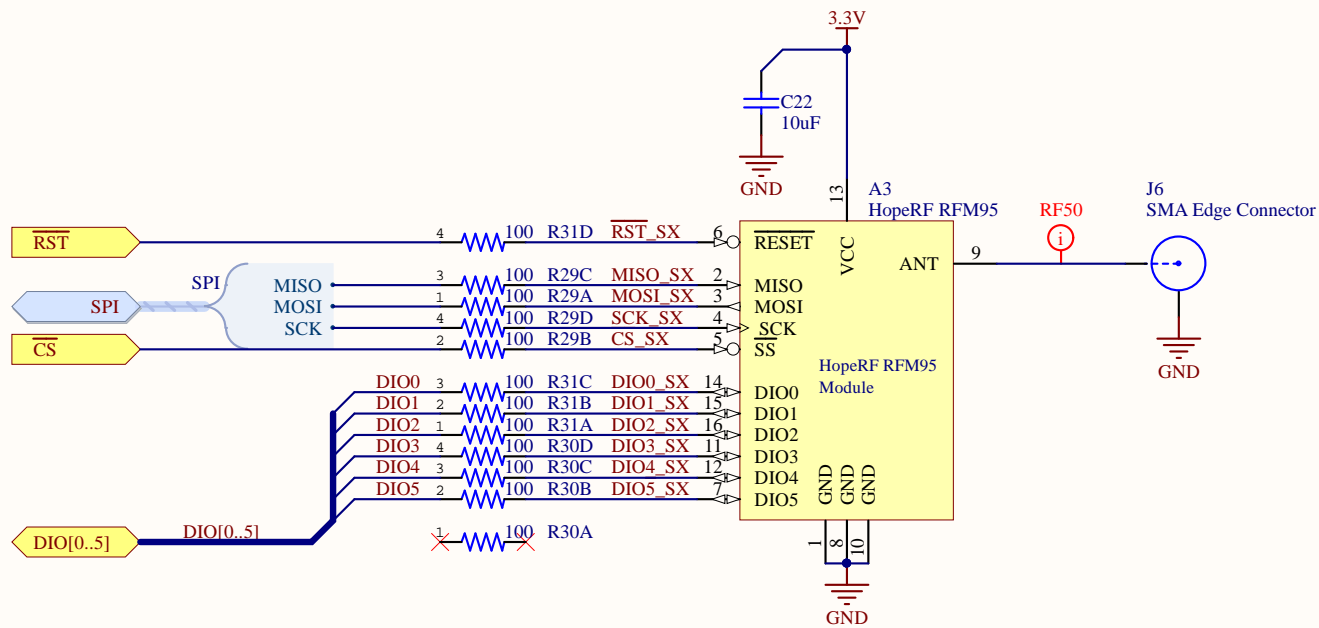

Title			LoRa	
Size	Number		Revision	
A			1	
Date:	3/6/2018		Sheet	of
File:	C:\Users\...\LoRa.SchDoc		Drawn By: Craig Hesling	


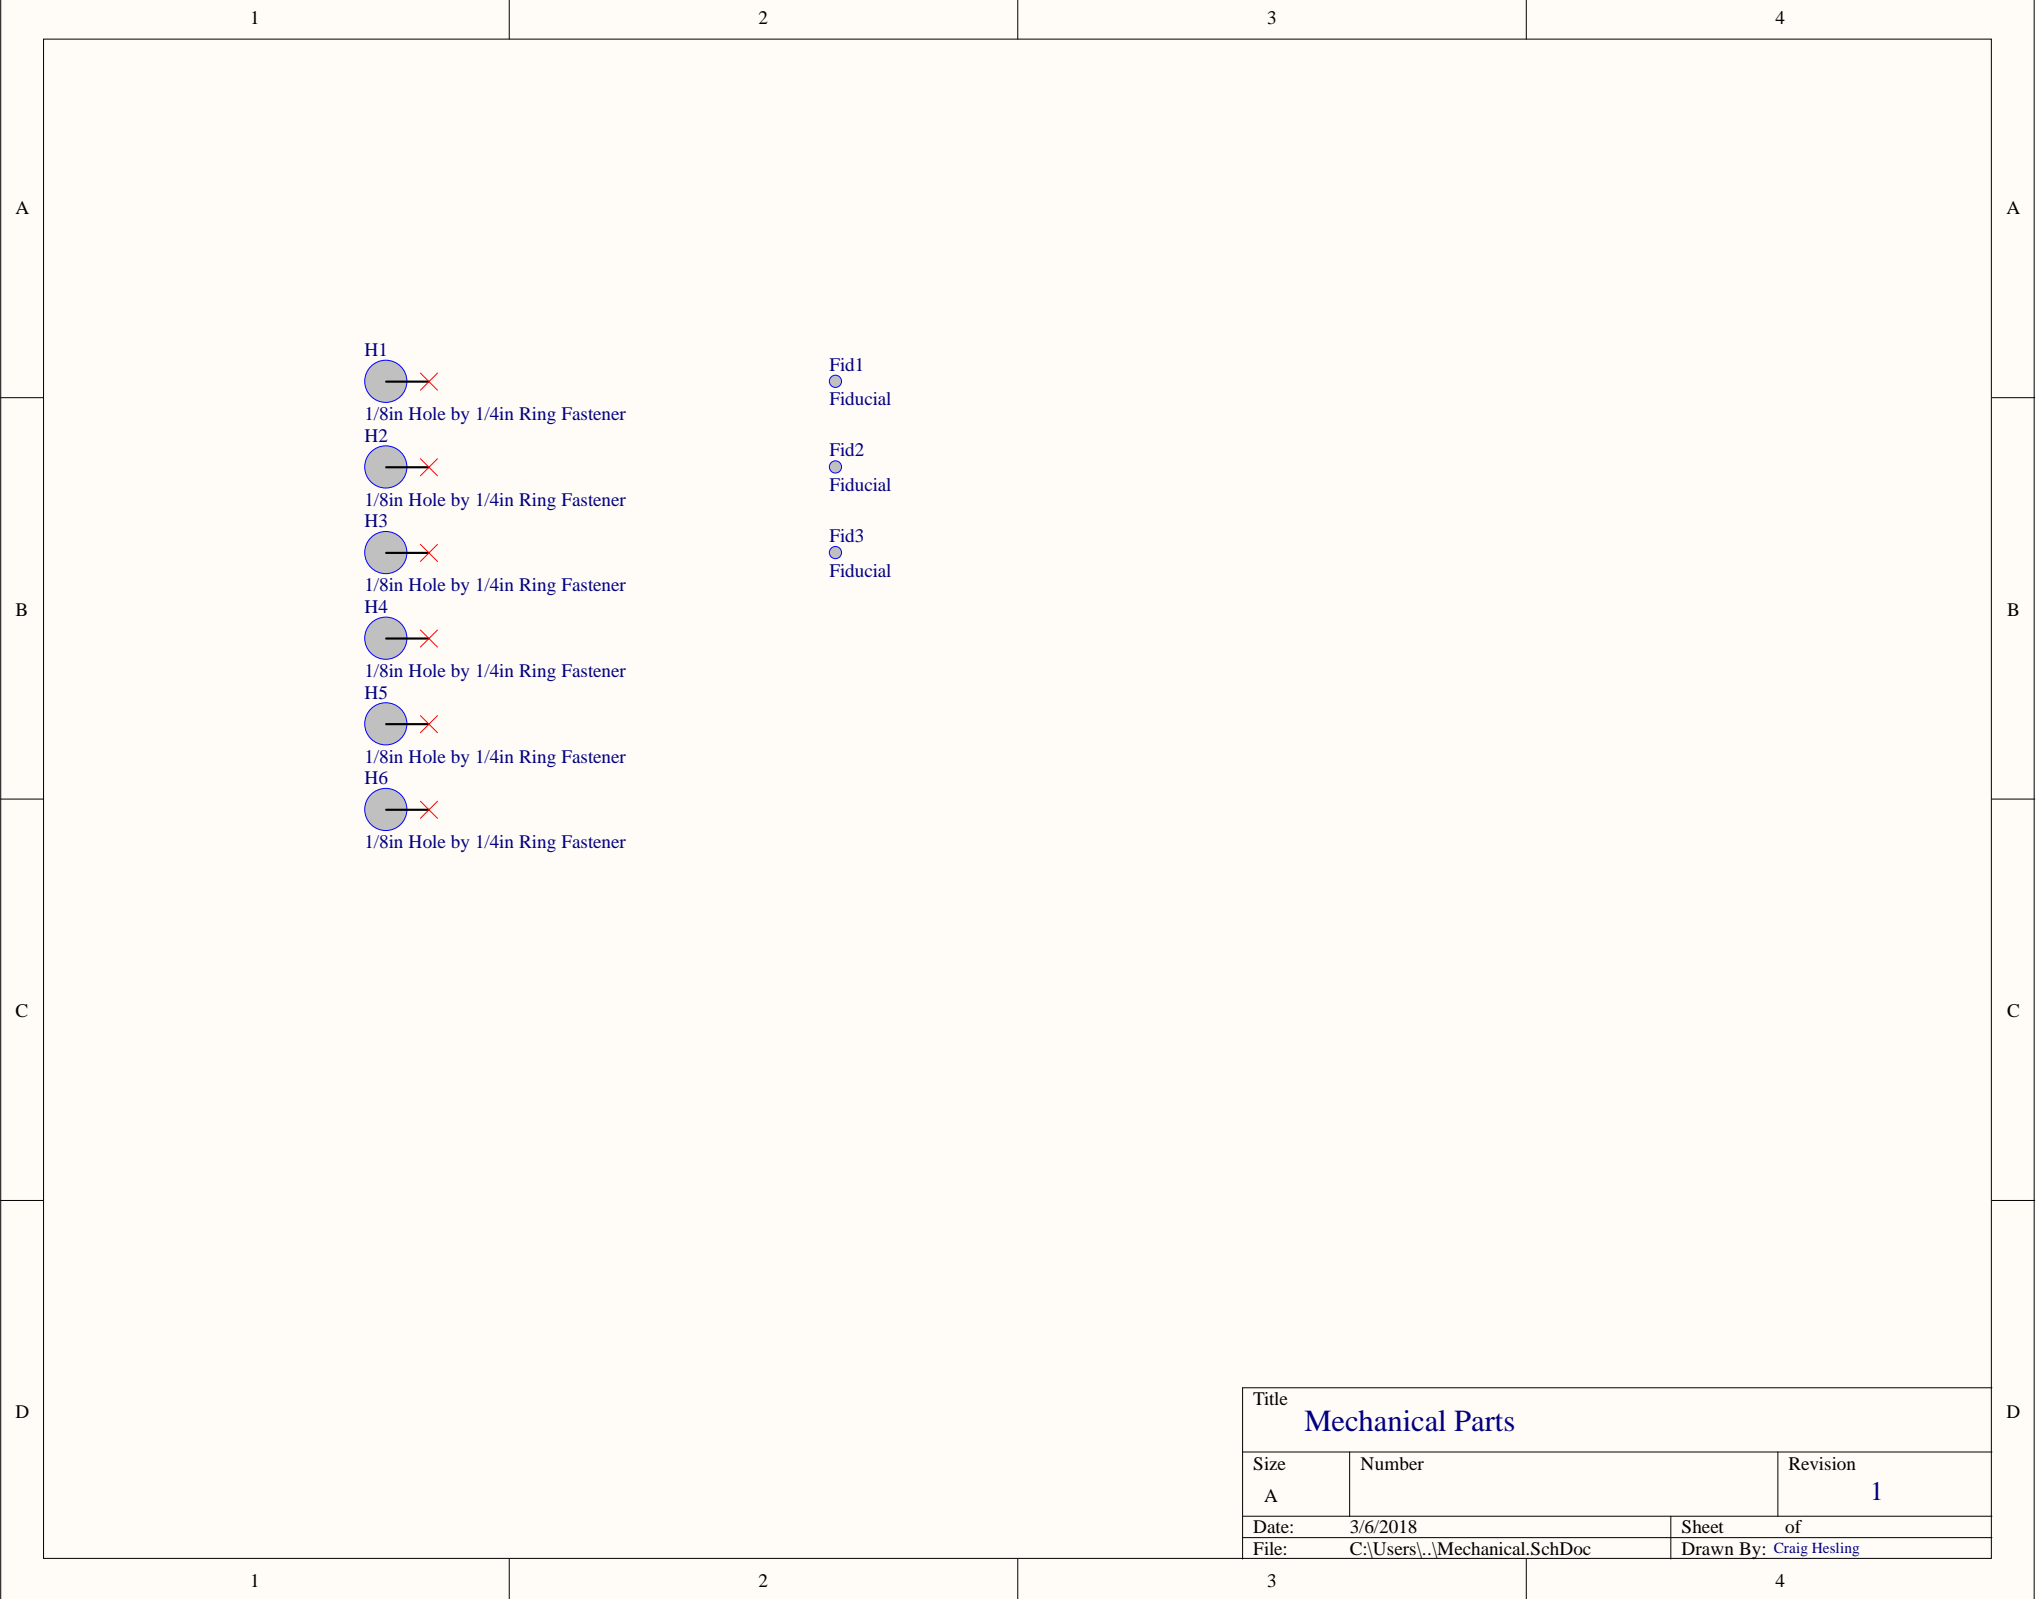


60Hz Zero Crossing Pulse


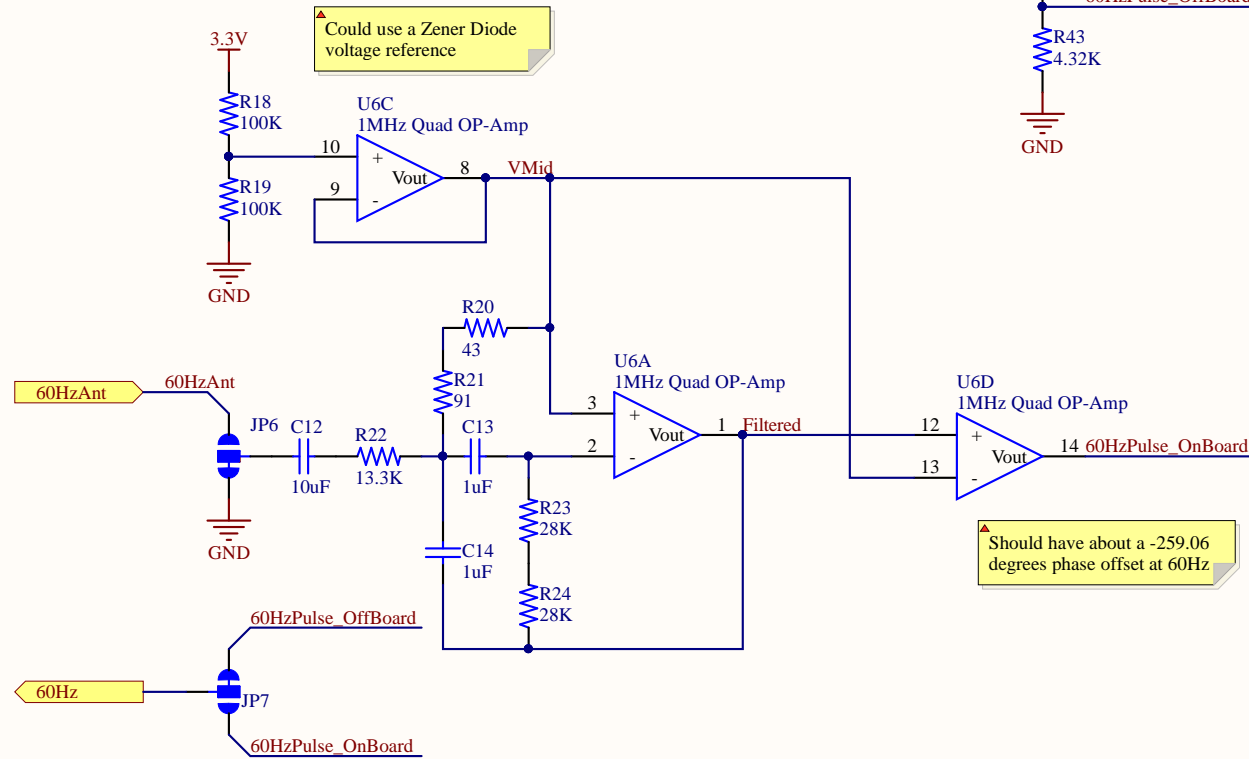


These jumpers simply allow you to bypass the zero crossing detector above. They must be changed in tandem. If using the onboard 60Hz detector, remove the 60Hz 5V Digital Input resistor (R42)


Unused OP-Amp

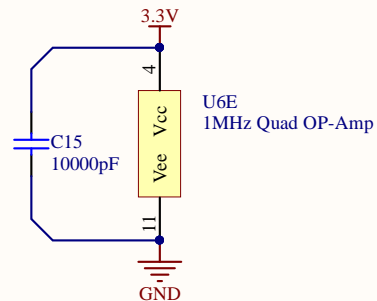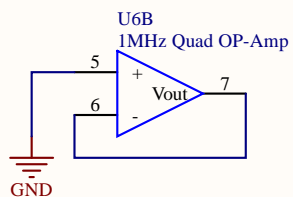


60Hz 5V Digital Input

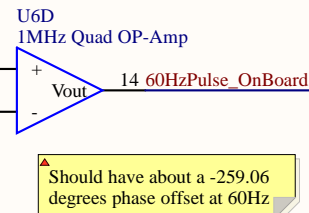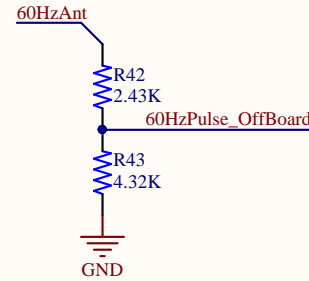



3.3V Regulation


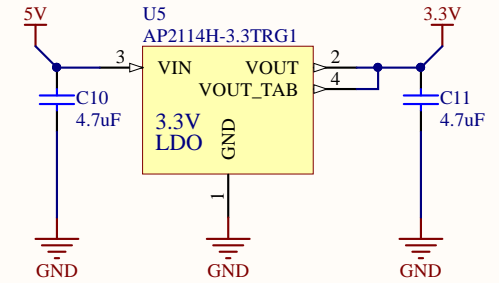


VREG Status Indicator

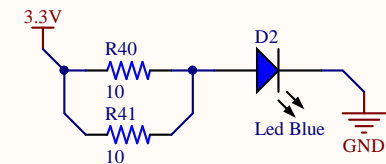

Title		
Power		
Size	Number	Revision
A		1.1
Date:	3/6/2018	Sheet of
File:	C:\Users\...\Power.SchDoc	Drawn By: Craig Hesling

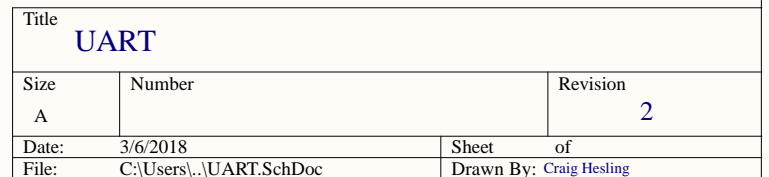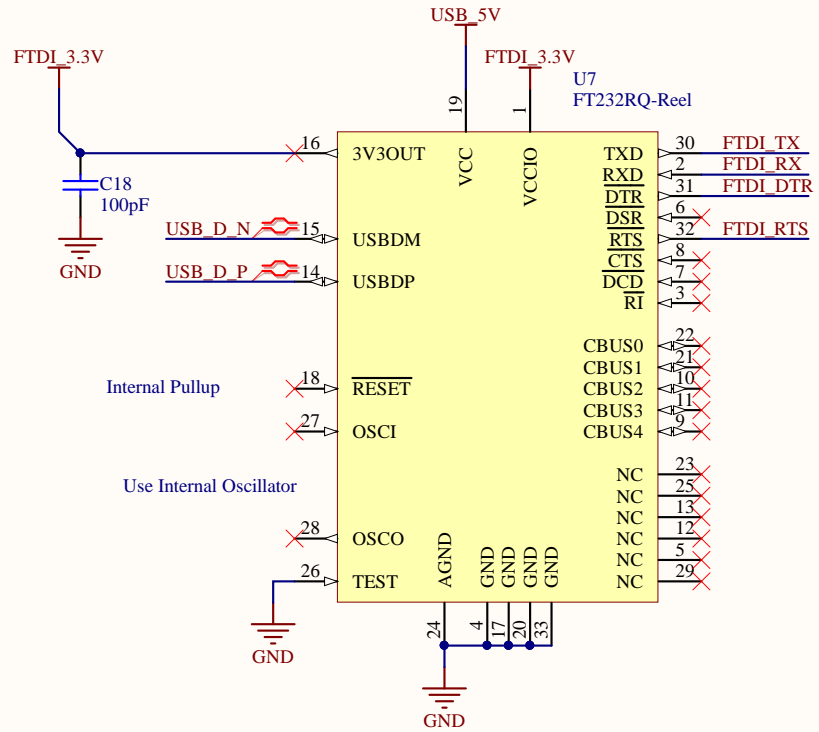

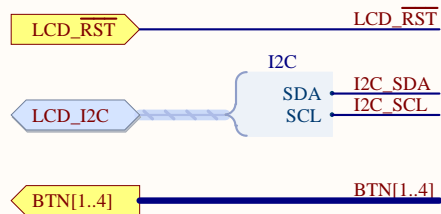

$$R1 = [(V_{out} - 3V) - 0V] / 10\mu A$$

$$R1 = [(12.0985V - 3V) - 0V] / 10\mu A$$

$$R1 = 909.853k\Omega$$

Using V_{out_min} , V_{out_max} , and the 910kOhm 1% tolerance, we have the following:


$$I_{ref_min} = [(V_{out_min} - 3V) - 0V] / (910k\Omega * (1+.01))$$

$$I_{ref_min} = 9.66523 \mu A$$




$$I_{ref_max} = [(V_{out_max} - 3V) - 0V] / (910k\Omega * (1-.01))$$

$$I_{ref_max} = 10.3431 \mu A$$


I_{ref_min} and I_{ref_max} are within 10uA+-2uA.

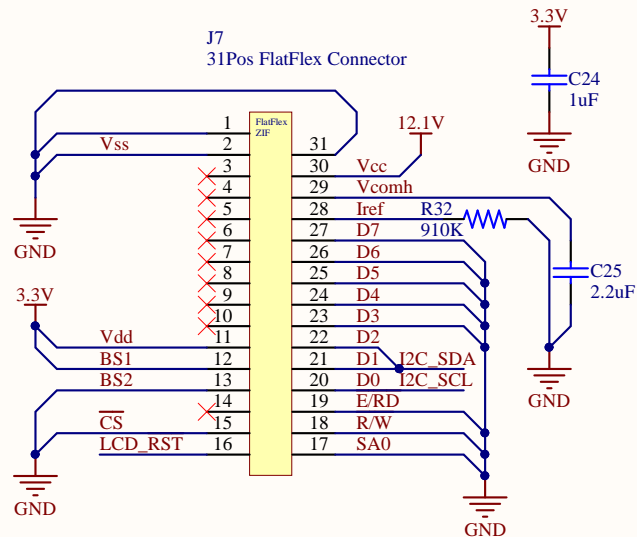

Display Navigation Buttons

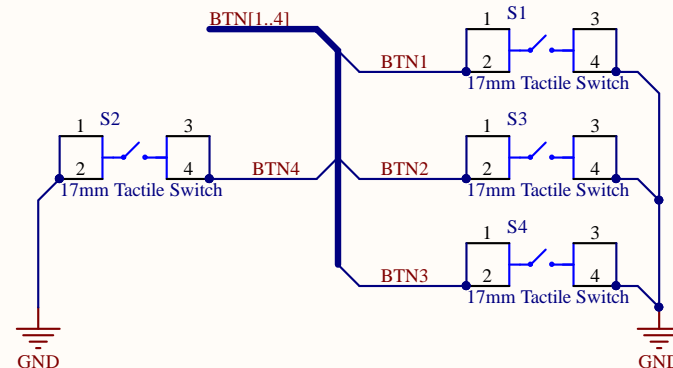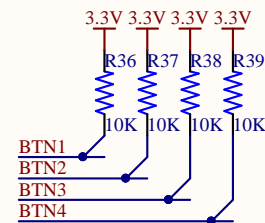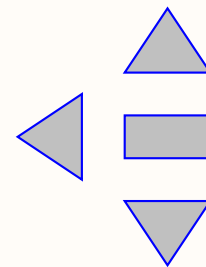

This is the boost converter for the OLED's display 12.1V supply.

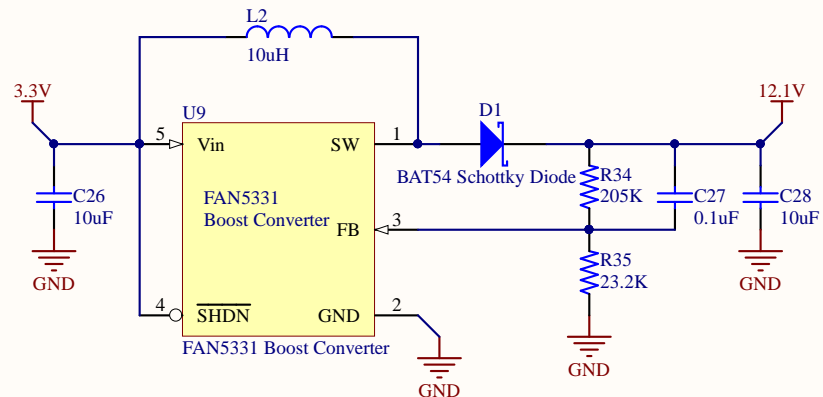

$$V_{out} = 1.23V * (1 + 205k/23.2k)$$

$$V_{out} = 12.0985V$$

Using the resistor's 1% tolerance, we have the following:

$$V_{out_min} = 1.23V * [1 + (205k * (1-.01)) / (23.2k * (1+.01))]$$

$$V_{out_min} = 11.8833V$$

$$V_{out_max} = 1.23V * [1 + (205k * (1+.01)) / (23.2k * (1-.01))]$$

$$V_{out_max} = 12.3181V$$

Title

User Interface

Size

A

Number

Date: 3/6/2018

File: C:\Users\...\UI.SchDoc

Revision

1.1

Sheet of

Drawn By: Craig Hesling

<https://learn.adafruit.com/assets/27580>