


1


- 1 - Remove the cable adapter and the cable shaft
- 2 - Unscrew the 3x screws

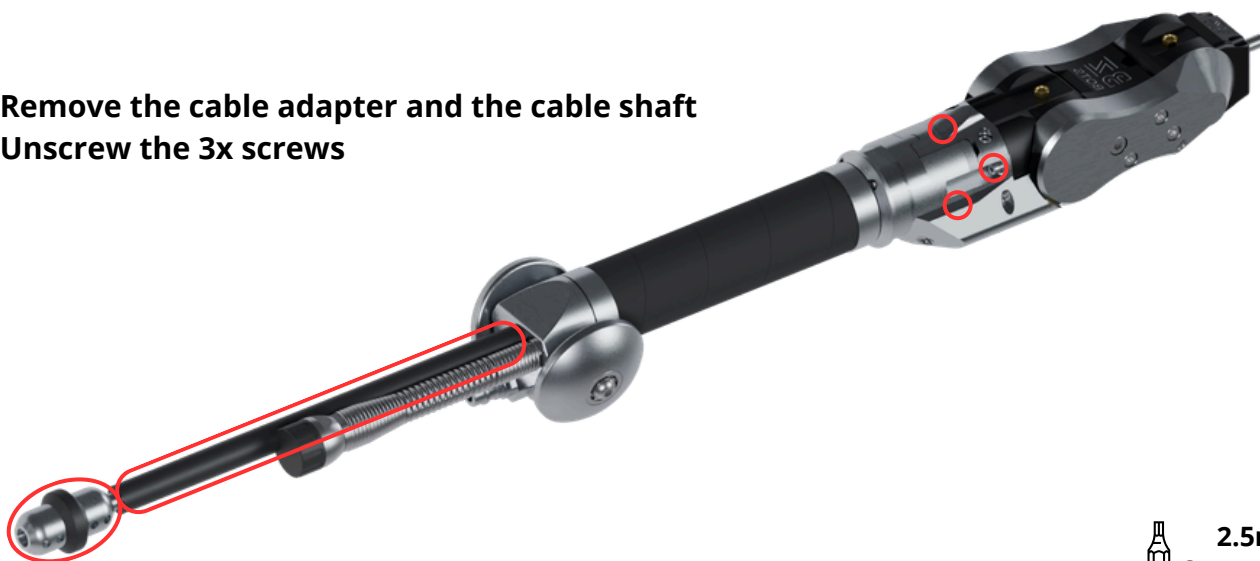

 2.5mm
 3mm

2

Remove the milling module

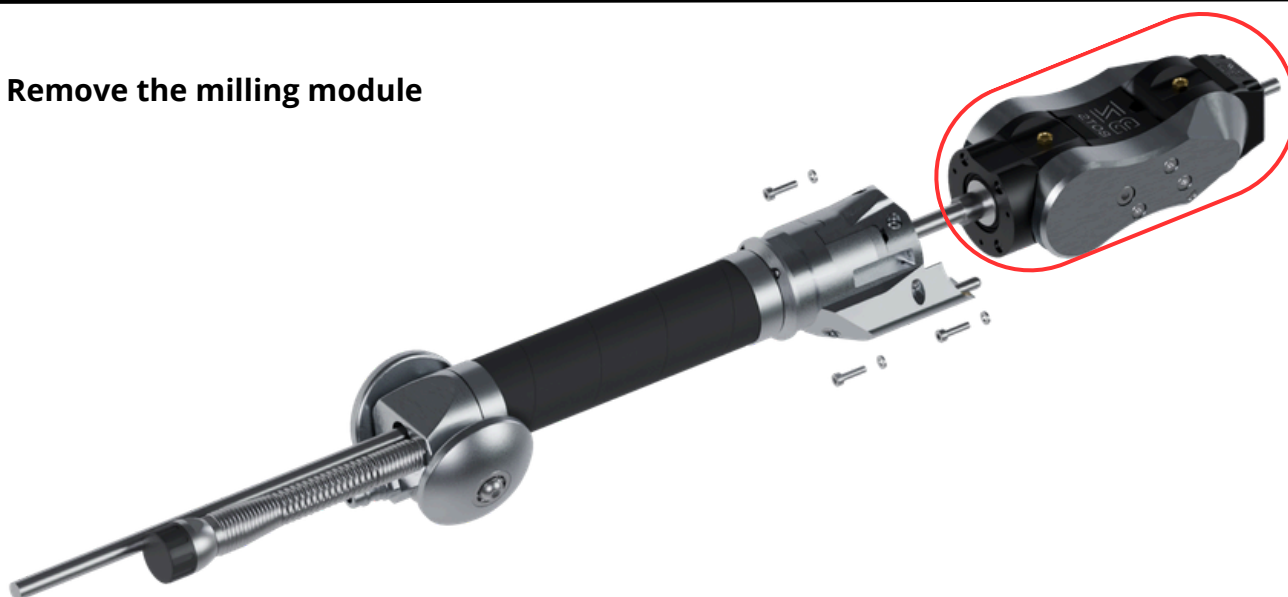

3

- 1 - Unscrew the 2x screws
- 2 - Pull the camera module
- 3 - To replace the camera module, perform the steps in reverse order



 T10