


Z7 的声子收集效率

一个 10.37 keV 的 K 线事件，有多少能量最后到了 TES 里 —— 先从一个脉冲读出来，再推到整个探测器

李知恒 · 明尼苏达大学 · SuperCDMS SNOLAB Run 4 · 2026 年 9 月
github.com/ZhihengLi0/urop → [snolab/collection_efficiency/](https://github.com/ZhihengLi0/urop/tree/main/snolab/collection_efficiency/)

问题是什么

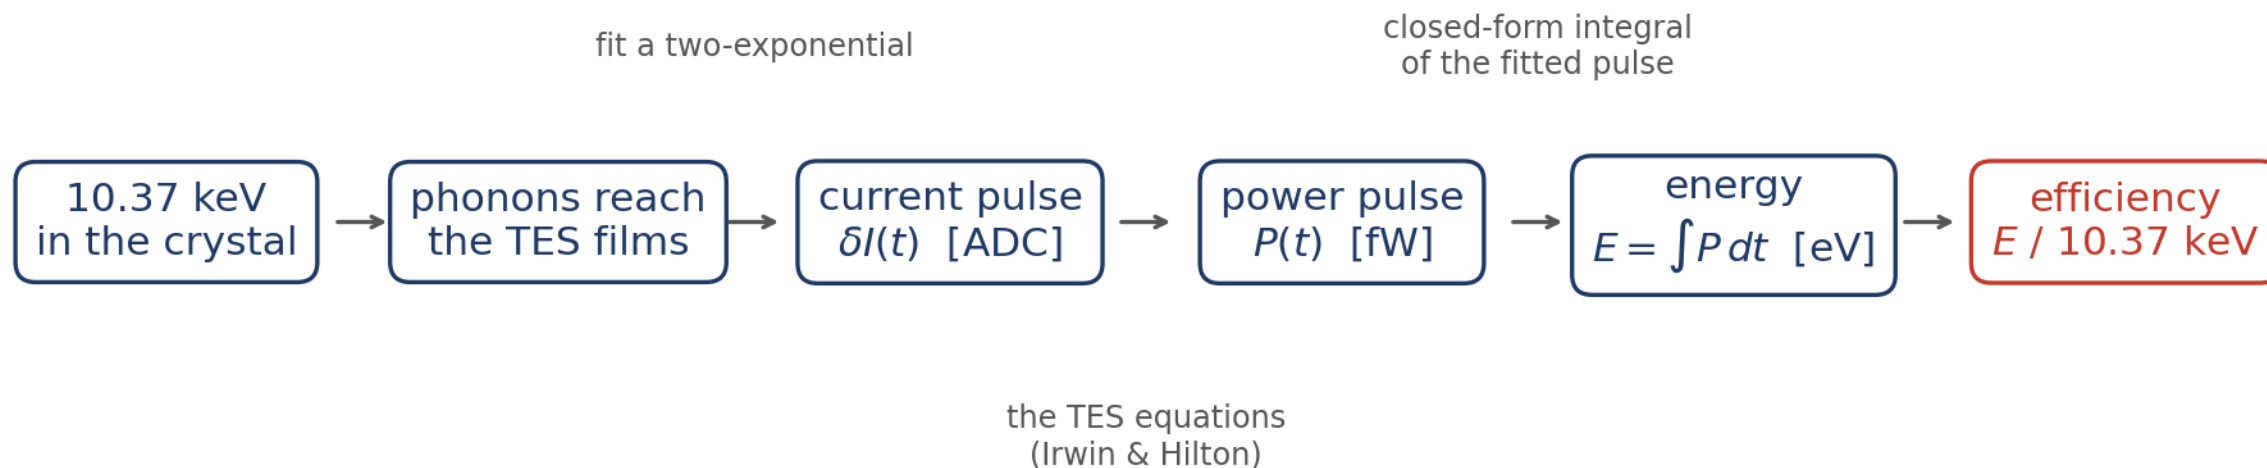

收集效率 = 到达 TES 薄膜的能量 ÷ 事件放进晶体的 10.37 keV

我们记录下来的是一条电流脉冲。

电流曲线下面的面积是电荷，不是能量——所以必须先把脉冲换成功率。

样本：Z7，Ge 活化的 K 线事件（2207 个事件，30 个 series，11 个通道的原始波形全部保存）。

电流 → 功率 , 功率 → 能量

$$P(t) = I_0 (R_L - R_0) \delta I(t) + 2 R_L (\delta I(t))^2$$

linear term

quadratic term

$$E = \int P(t) dt = I_0 (R_L - R_0) A (\tau_f - \tau_r) + 2 R_L A^2 \left(\frac{\tau_f + \tau_r}{2} - \frac{2 \tau_f \tau_r}{\tau_f + \tau_r} \right)$$

for the fitted pulse $\delta I(t) = A [e^{-t/\tau_f} - e^{-t/\tau_r}]$ integrated from $-\infty$ to $+\infty$: zero before it starts, decays to zero after

Z7 PBS1 bias point (measured, from detectorConfig): $I_0 = -18.07 \mu\text{A}$, $R_0 = 44.16 \text{ m}\Omega$, $R_L = R_p + R_{sh} = 19.24 \text{ m}\Omega$

$$\Rightarrow I_0 (R_L - R_0) = 4.50 \times 10^{-7} \text{ V} \quad \text{and} \quad 2 R_L = 0.0385 \Omega$$


功率 = 电流变化 δI 之后焦耳热的变化量：一个线性项，加一个很小的二次项。

两个系数都是这个通道实测的偏置点——没有任何拟合和调参。


拟合出双指数，从 $-\infty$ 积到 $+\infty$ ：能量就是 A 、 τ_f 、 τ_r 的一个公式。

一个脉冲，三种读法

Z7 PBS1，事件 30646：同一条波形，读成 ADC 计数、读成电流、读成功率

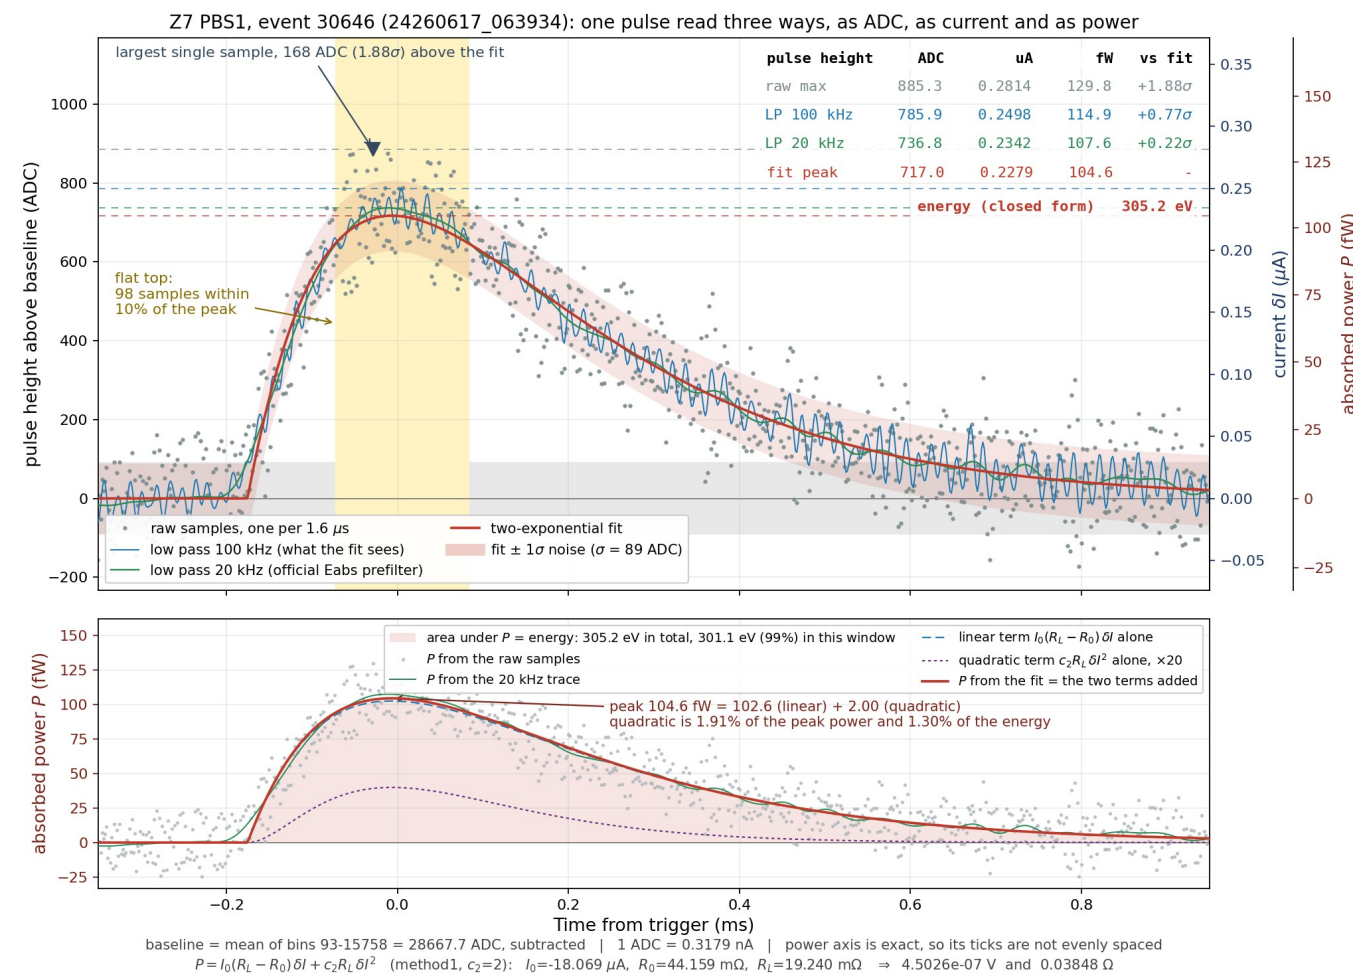


脉冲高度：从拟合取，不从最大的采样点取

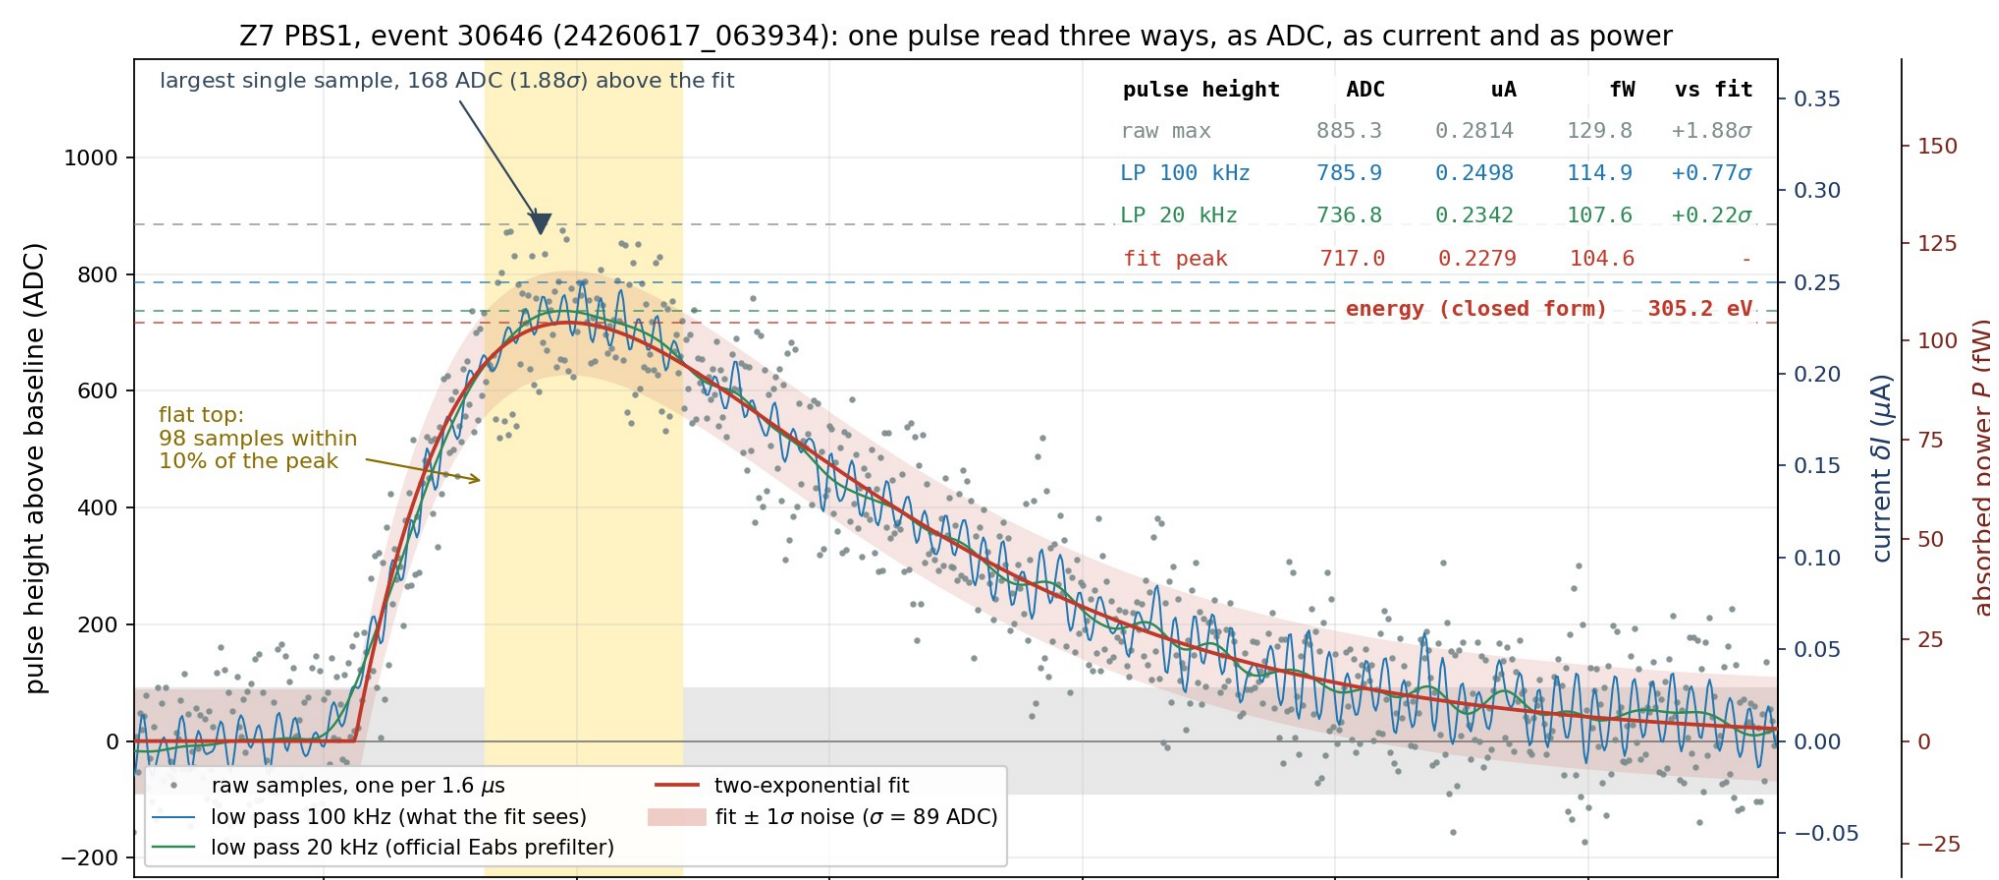

黄色竖带：98 个采样点都在峰高的 10% 以内。其中最大的那个，就是噪声往上跳得最多的那个。

原始数据最大值 885 ADC ，拟合峰值 717 ADC ：取最大值偏高 23%。滤波能减轻，拟合能消除。

功率脉冲，它的面积就是能量

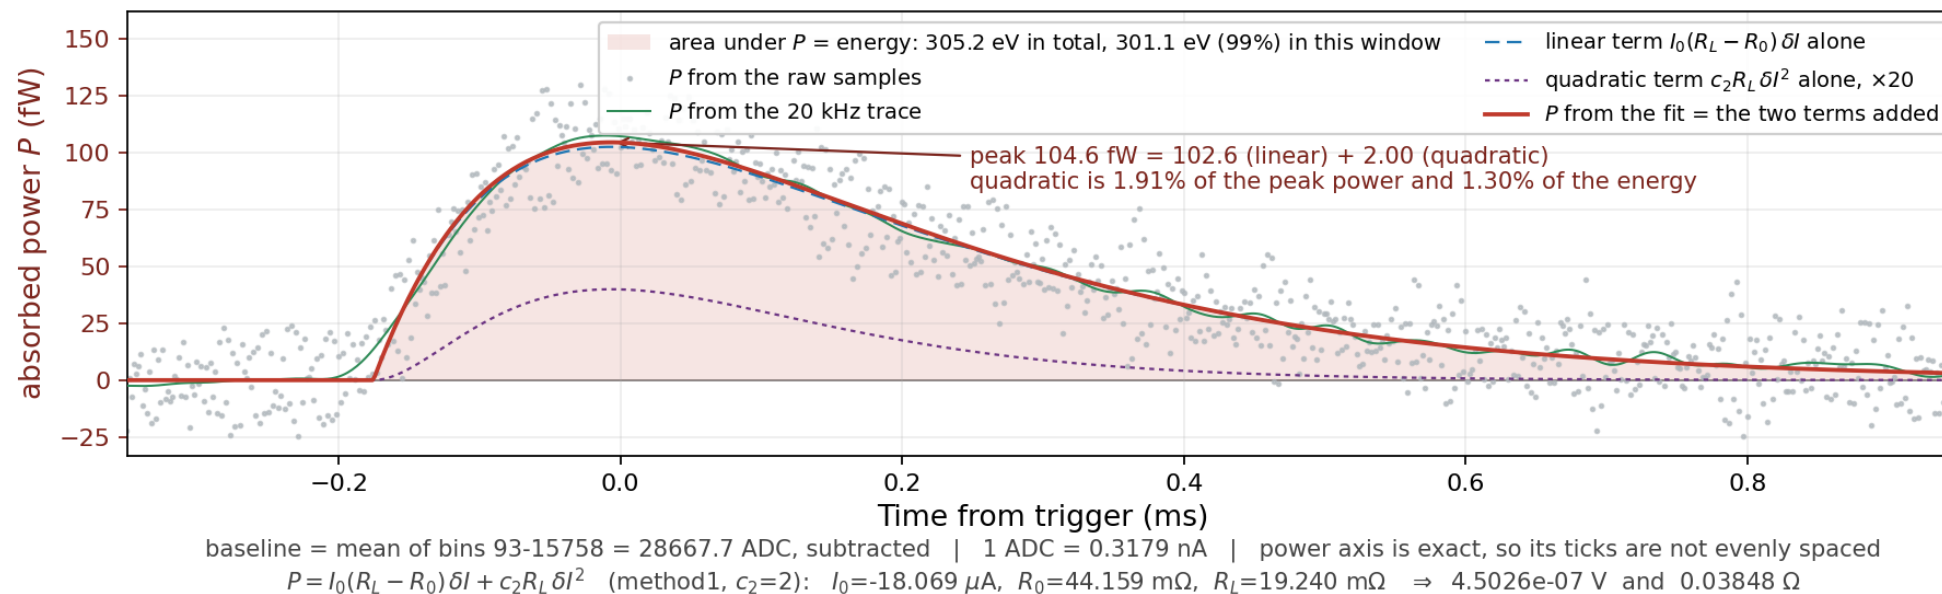


红线：拟合出的电流代进公式。蓝色虚线：只有线性项。紫色点线：只有二次项，放大 20 倍。

二次项只占峰值的 1.9% —— 功率脉冲的形状和电流脉冲一样。

粉色面积就是这个通道吸收的能量：305 eV。

为什么积分的是拟合脉冲，不是原始数据

从 52 ms 波形的开头一路累计的能量；触发在点线处




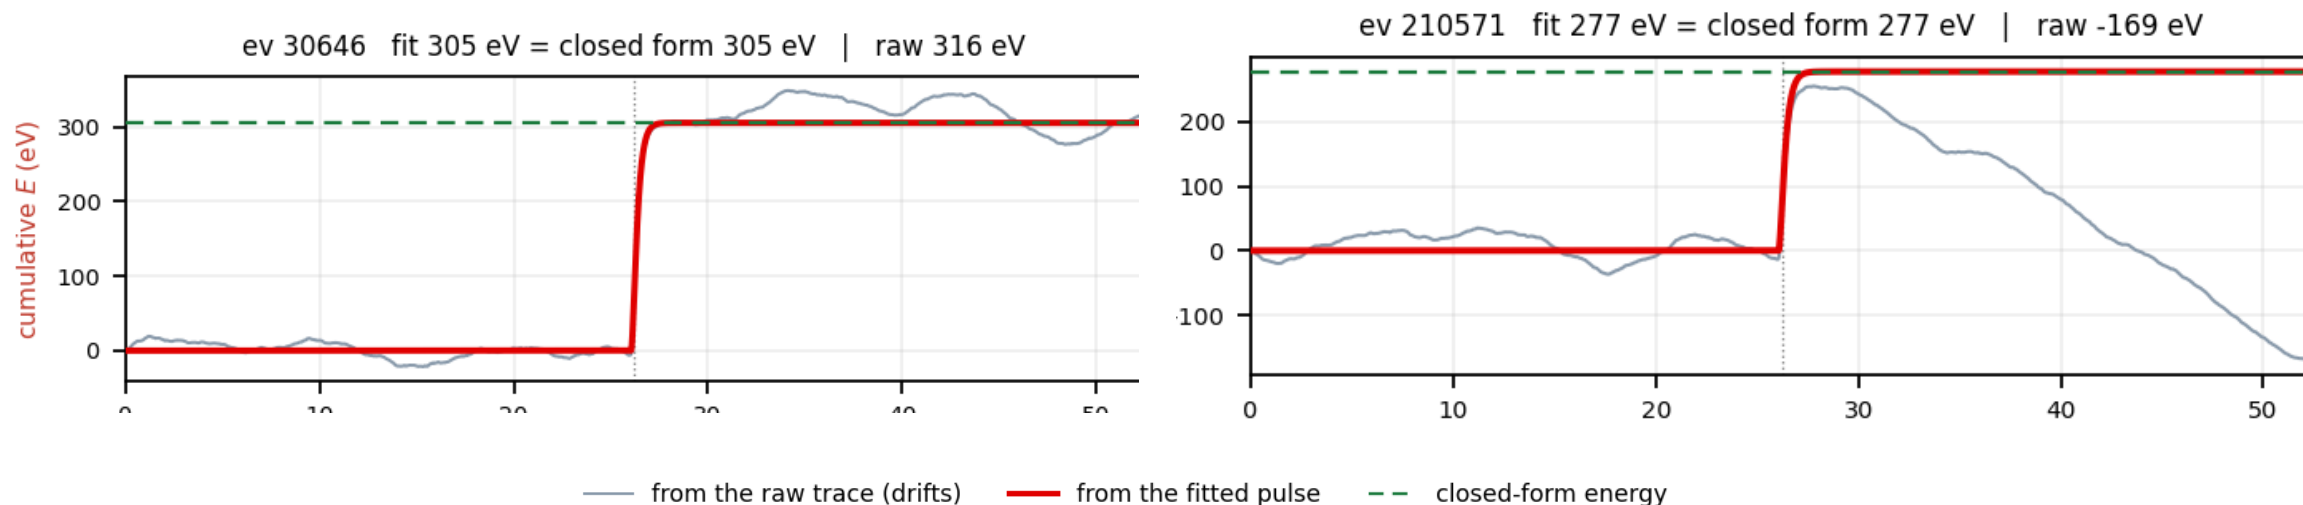


红线，来自拟合：脉冲之前是 0，1 ms 之内升上去，之后保持水平——终点正好等于公式算出的值。

灰线，来自原始波形：一直在漂。基线偏 1 nA，15 ms 积下来就是 42 eV。右图：拟合 277 eV，原始波形 -169 eV。

同一个事件的其他通道：加起来是 33%

Z7 事件 30646 ; 11 个通道里的 4 个

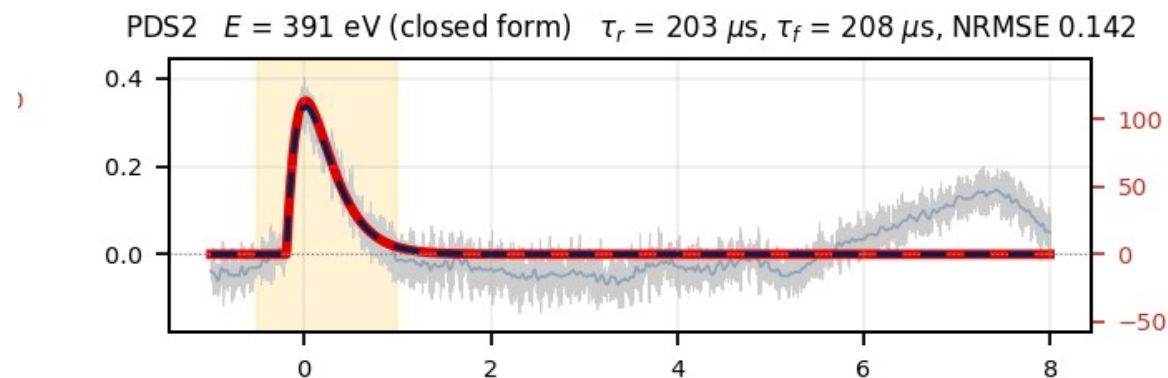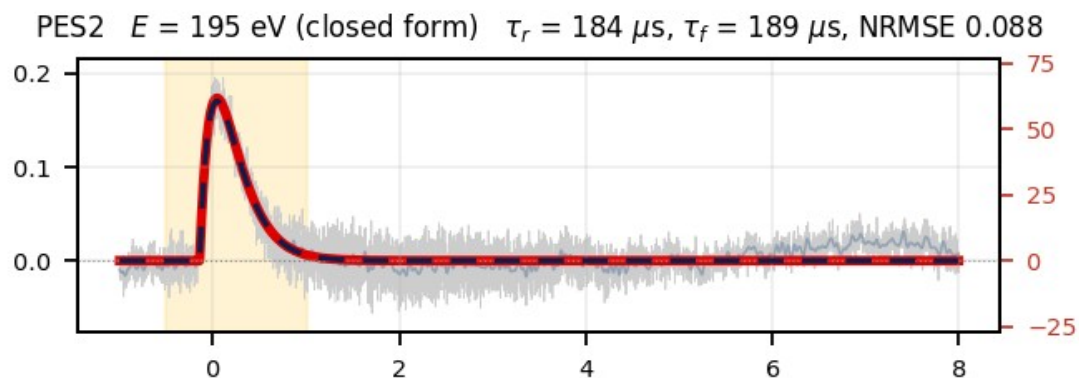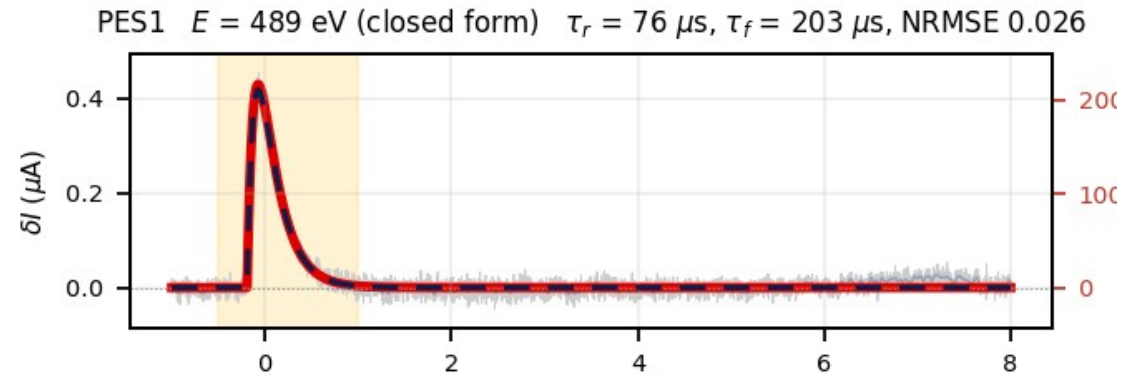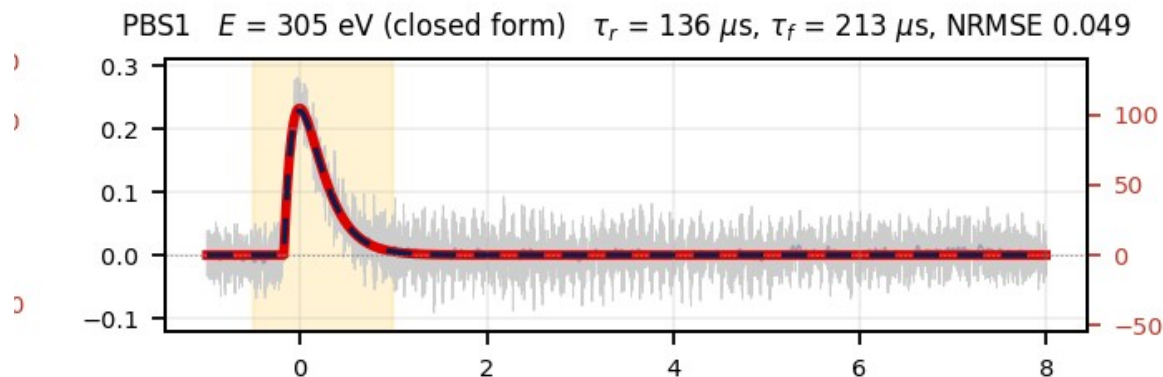


各通道分到的能量很不均匀 (PES1 489 eV , PES2 195 eV) : 事件发生的位置更靠近一侧。

11 个通道加起来 : 3419 eV = 10.37 keV 的 33.0% 。 PDS2 (右下) 有一个缓慢的大起伏 —— 记住它。

现在看所有事件：一个通道给出又宽又歪的分布

PBS1 , 1917 个 K 线事件，每个事件一次拟合、一次积分

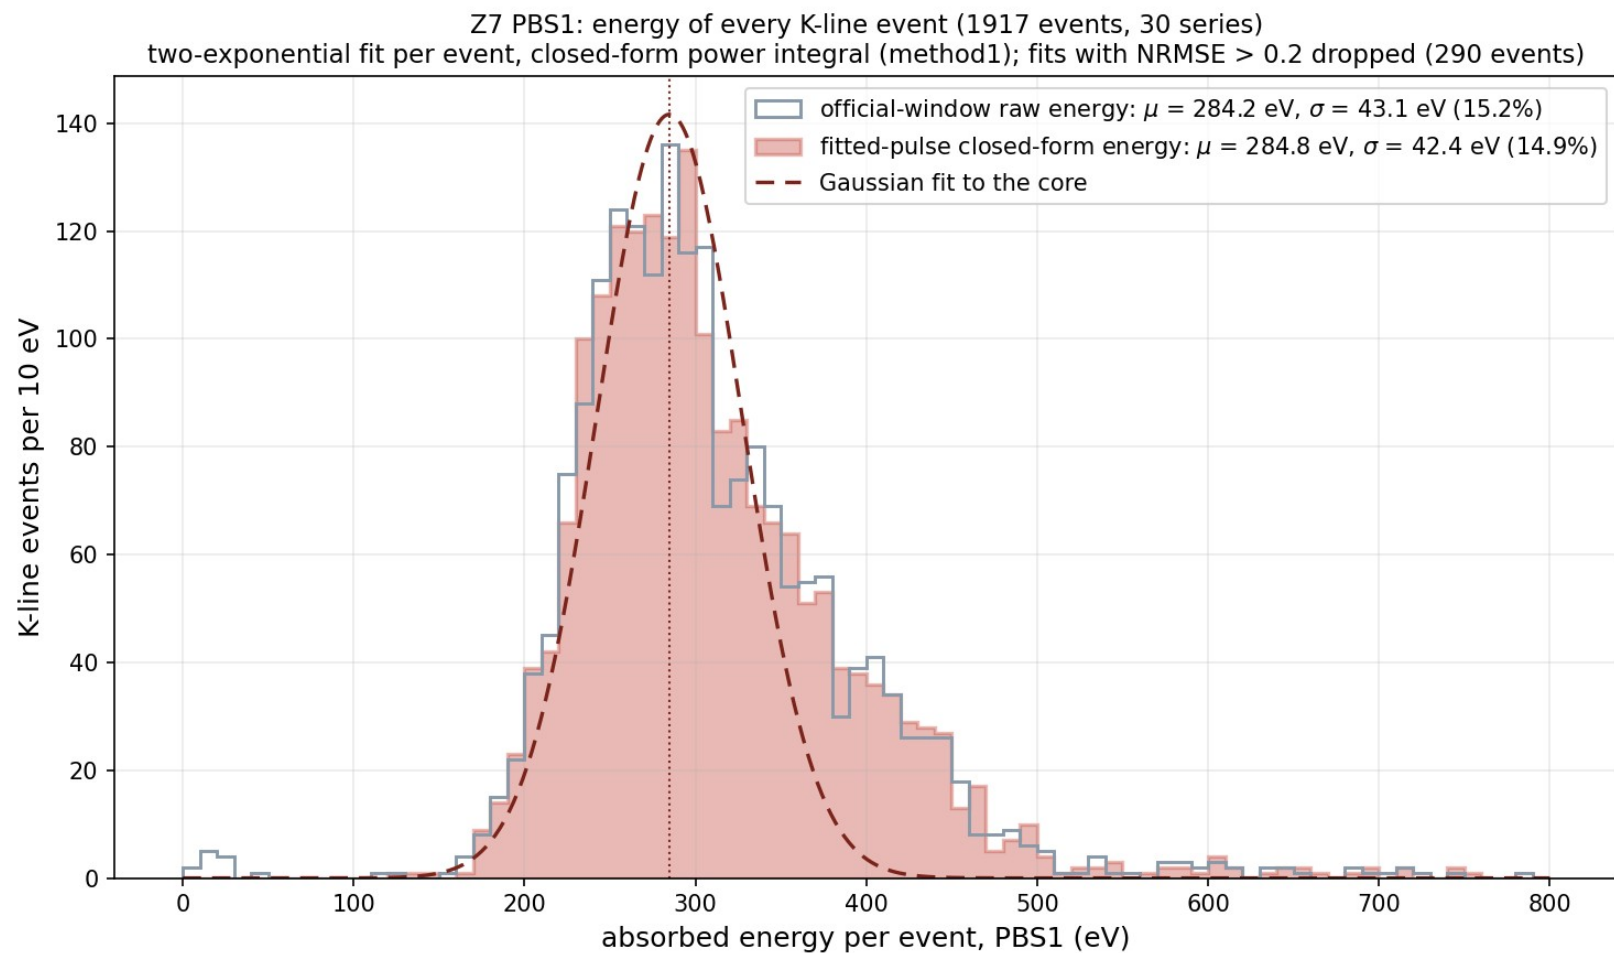

红色：来自拟合。灰色：官方窗口在原始波形上算的。峰位只差 0.2%。


峰 285 eV，宽度 15% —— 这可是一条能量固定的谱线。

往右拖的尾巴，是发生在这个通道附近的事件。

单通道的宽度是事件位置，不是噪声。

各通道求和： $32 \pm 1\%$

每个 K 线事件被 TES 吸收的总能量

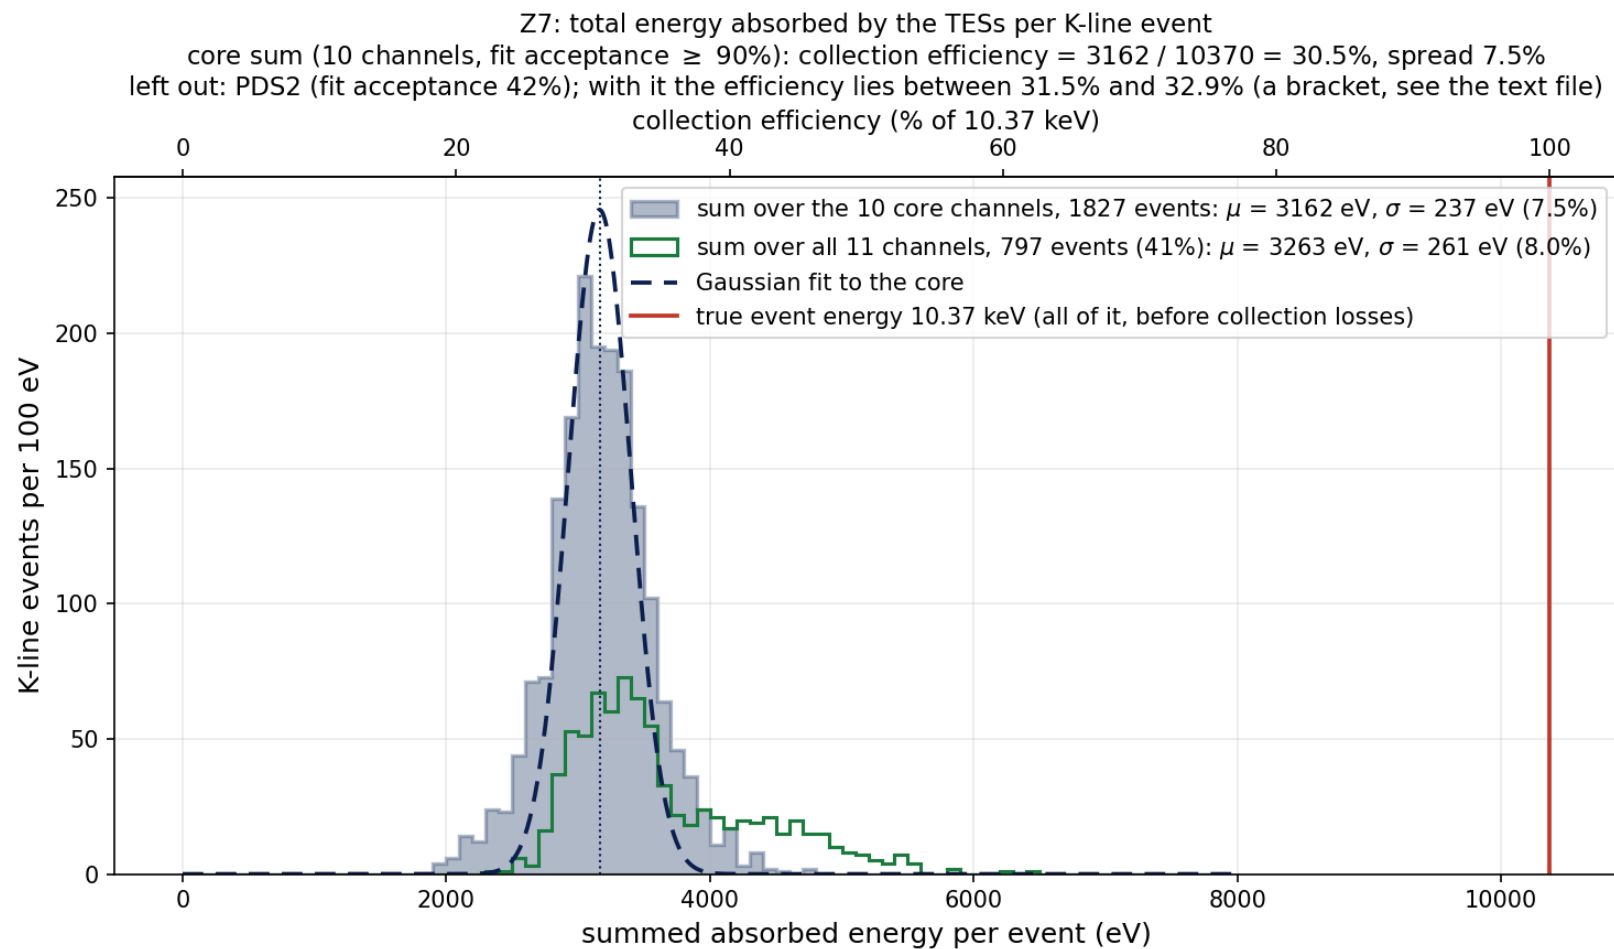

10 个通道求和，1827 个事件：
 $3162 \text{ eV} = 30.5\%$ ，宽度降到 7.5%
—— 位置效应抵消了。

PDS2 只有 42% 的事件能拟合上
(那个缓慢起伏)，而且这些事件不典型；它的份额只能给一个范围。

完整效率 31.5–32.9%：
 $32 \pm 1\%$ 。

红线：10.37 keV —— 三分之二的
能量根本没到 TES。

总结，以及还没落实的

电流脉冲通过 TES 方程变成功率脉冲；功率下面的面积就是能量。二次项只有 2%。

能量来自拟合脉冲、从 $-\infty$ 积到 $+\infty$ ：没有最大值的噪声偏差，没有漂移。


单通道：15% 宽、歪的（位置效应）。10 个通道求和：7.5%、对称。

Z7 把一个 10.37 keV 事件的 $32 \pm 1\%$ 吸收进 TES。CDMS 文档在 R37 CUTE tower 上报的是 26–41%。

还没落实：只做了 Z7·Z7 的 HV 偏压没有确认（按 0 V 算）· 没有 dI/dV ，电感项被丢掉· PDS2 就是那 $\pm 1\%$ · 12.5% 的事件在任何通道都拟合不上，没进直方图。

Backup — 事件谱

Z7: summed PTOFamps over 27 series, rebuilt from the Prompt processing with no cut applied
the note's version of the same plot rejects SumPF/PT below 0.1; the difference between the two curves is what that cut removes

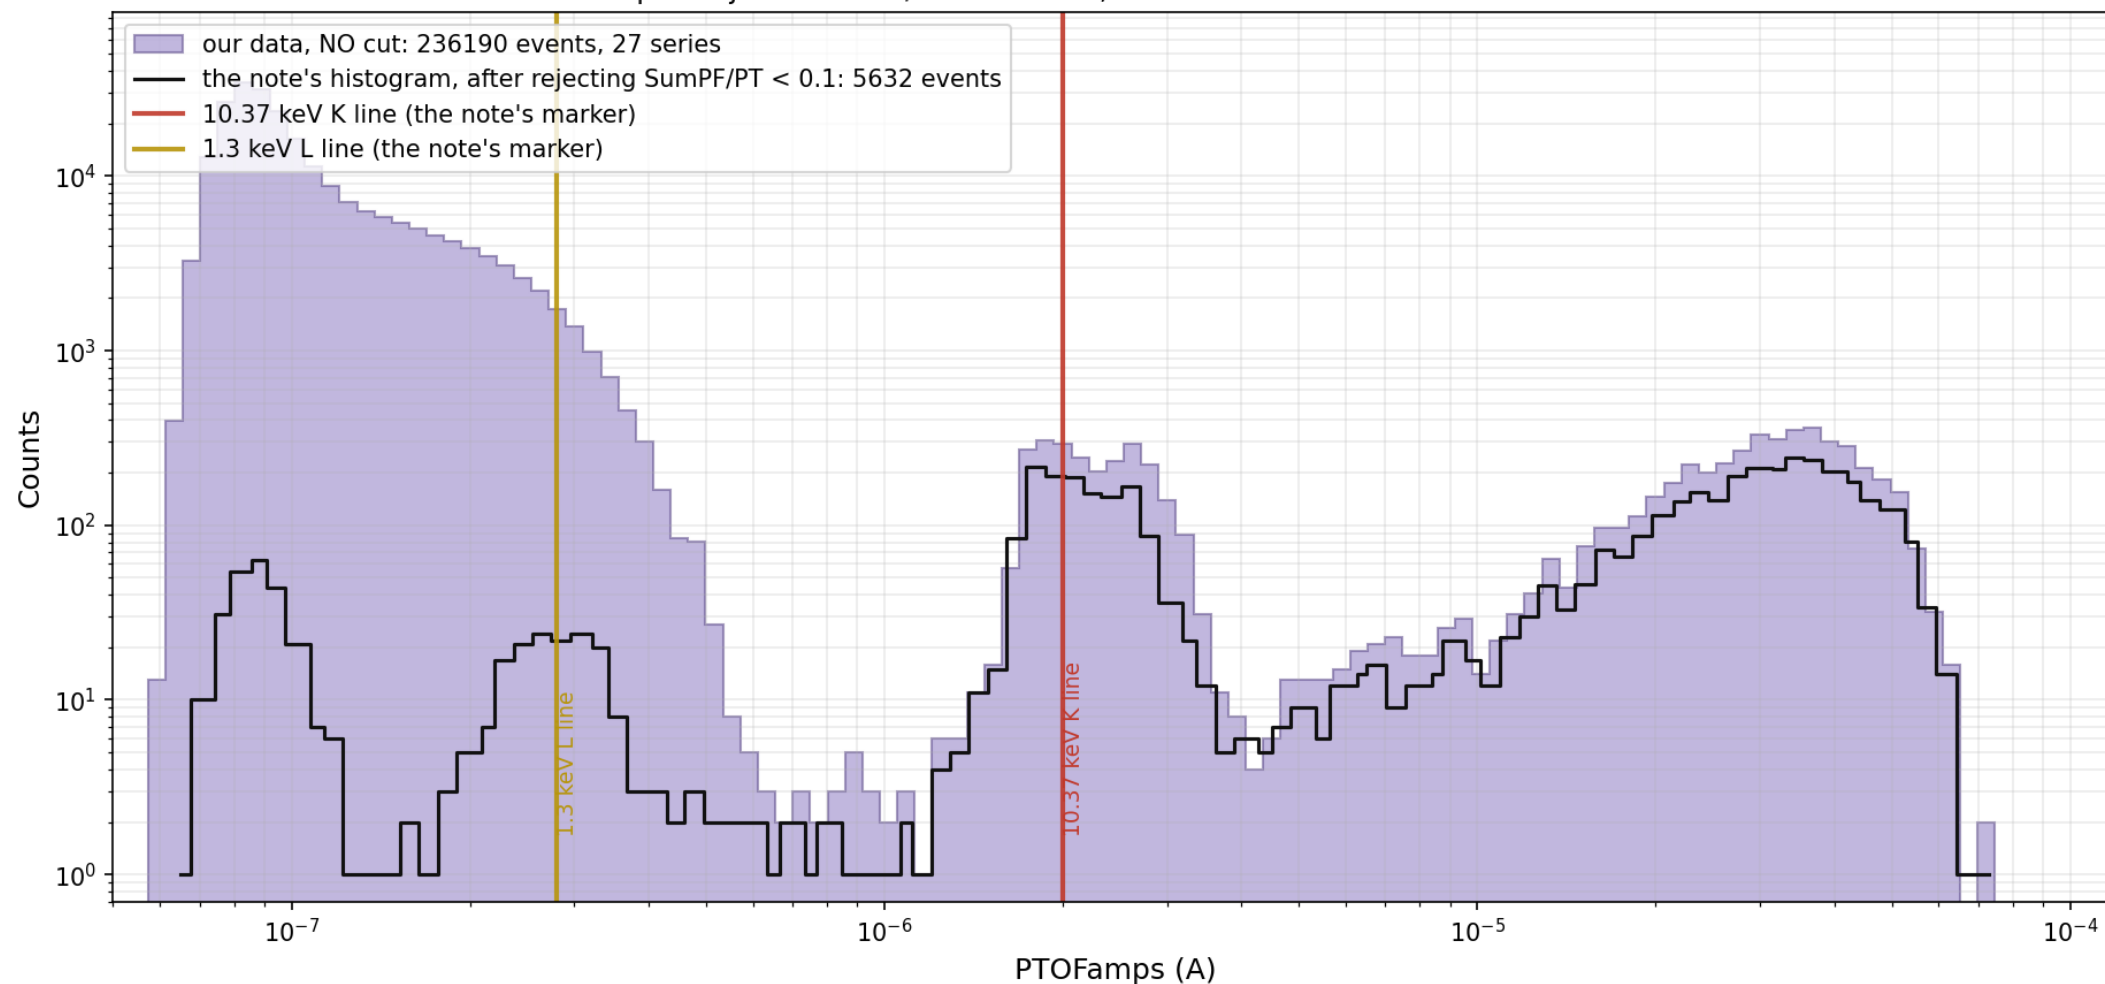

Backup — 功率公式的三个版本

$P = I_0(R_L - R_0) \cdot \delta I + c_2 \cdot R_L \cdot (\delta I)^2$ $c_2 = 2$ (method 1 , 本报告用的)、 1 (精确的小信号解)、 -1 (method 2)


相对精确解：method 1 高 0.58% ， method 2 低 1.15% —— 远小于单通道 15% 的宽度和 PDS2 的范围。

完整方程里的电感项需要 L 和 loop gain ，要从 dI/dV 来，MSI 上这些 series 没有这个数据；这一项被忽略。

官方 Eabs (触发在第 16383 点，基线是 93..15758 点的平均，5 阶 20 kHz 预滤波，窗口 $-0.5/+1$ ms ，同一个公式) 复现到 0.2% ；直方图页上的灰色轮廓就是它。


Backup — 15 个事件，拟合电流和功率 (PBS1)

Z7 PBS1: fitted current pulse (dashed navy) and the power pulse it implies (red)
 Z7 24260617_063934, K-line events | method1: $P(t) = 10(R_L R_0) \cdot dI(t) + 2 \cdot R_L \cdot L \cdot (dI(t))^2$ | bias point per channel from detectorConfig, ADC/A = 3.145728e+09
 the current is the two-exponential FIT, refitted directly in amperes (model $A[\exp(-t/\tau_r) - \exp(-t/\tau_f)]$), 5 free params, pretrigger free in 16383+-3000; the raw trace is drawn only for reference
 integration runs over the whole trace, 0 to 52.43 ms; for the fitted pulse this equals the closed-form integral, so the energy no longer depends on the window

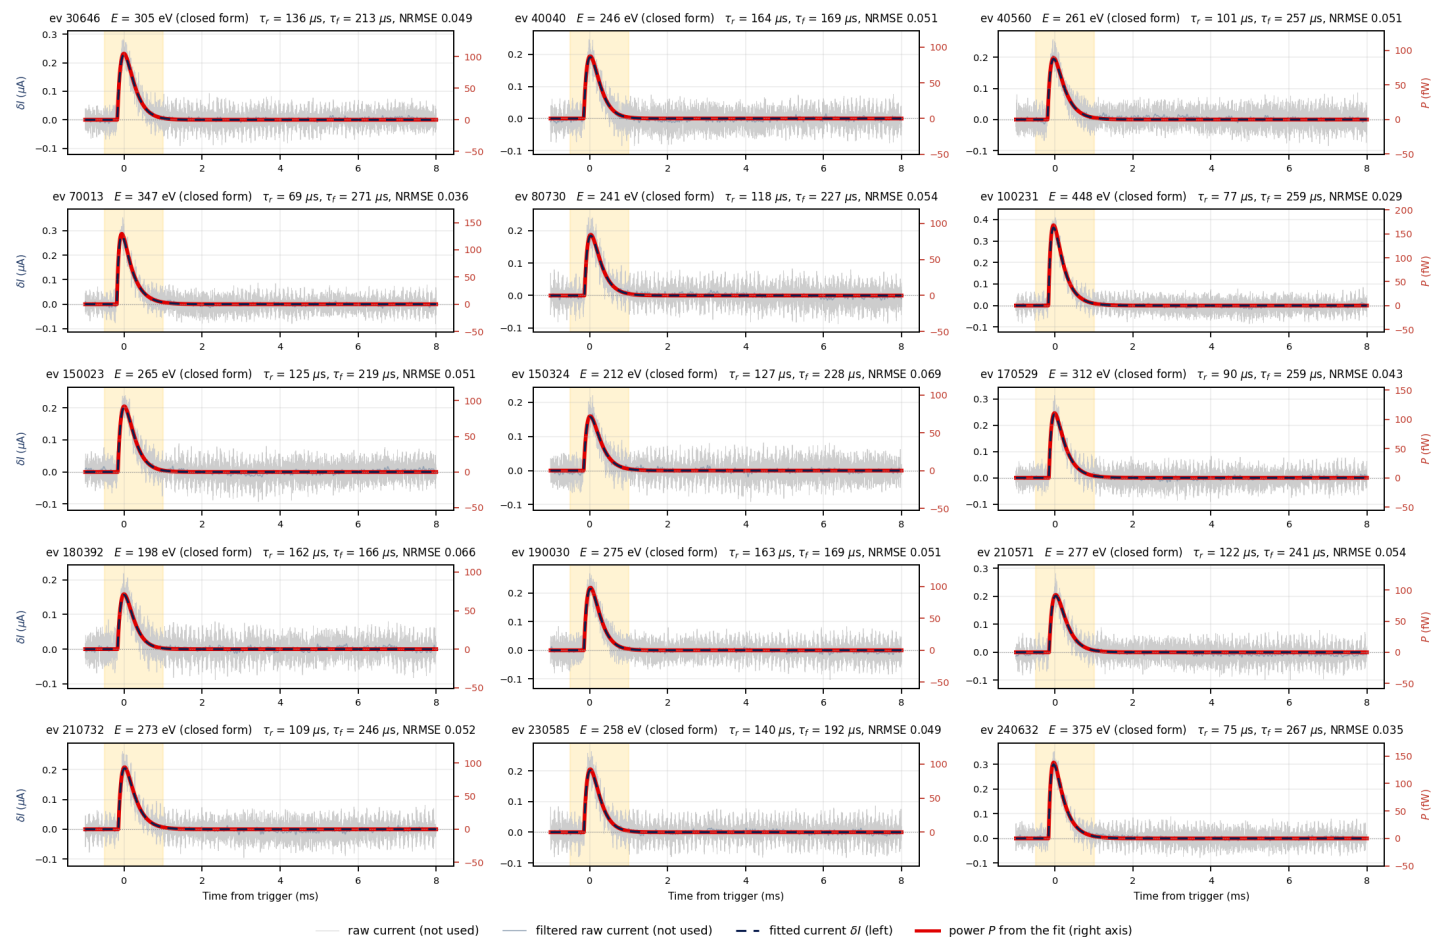


Backup — 15 个事件，累计能量（ PBS1 ）

Z7 PBS1: integrated power = absorbed energy, fitted pulse vs raw trace
Z7 24260617_063934, K-line events | method1: $P(t) = 10(R-LR0)*dl(t) + 2*R_L*(dl(t))^2$ | bias point per channel from detectorConfig, ADC/A = 3.145728e+09
the current is the two-exponential FIT, refitted directly in amperes (model $A[\exp(-t/\tau_f) - \exp(-t/\tau_r)]$), 5 free params, pretrigger free in 16383+-3000; the raw trace is drawn only for reference
integration runs over the whole trace, 0 to 52.43 ms; for the fitted pulse this equals the closed-form integral, so the energy no longer depends on the window

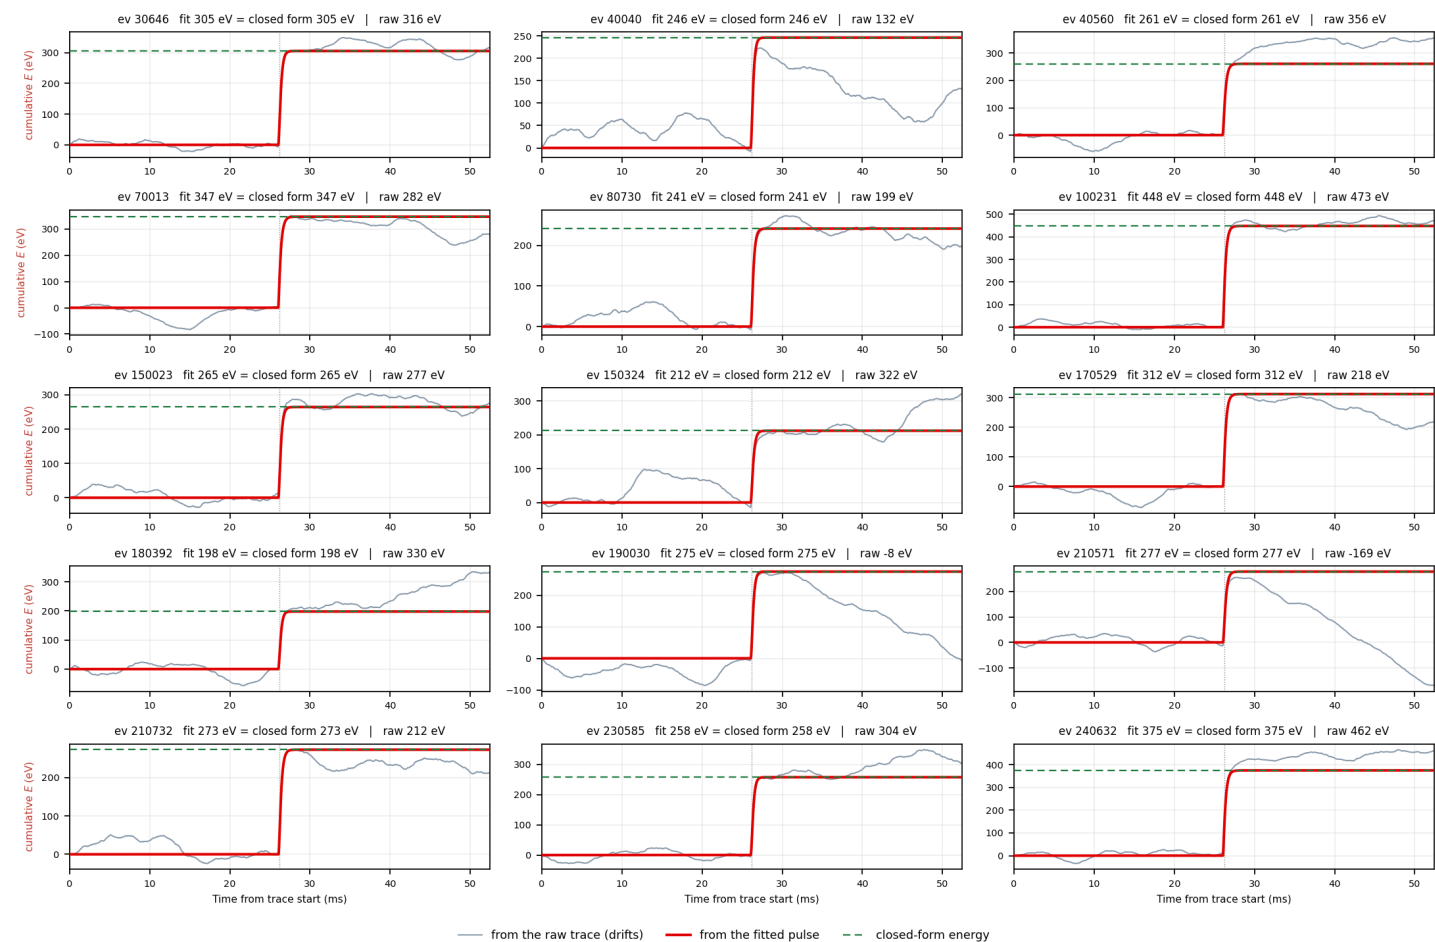

Backup — 事件 30646 , 全部通道

Z7 event 30646, all channels: fitted current and power
sum over channels from the fits: 3419 eV = 33.0% of 10.37 keV (official-window raw sum 3397 eV = 32.8%)
Z7 24260617_063934, K-line events | method1: $P(t) = I_0(R_L - R_0) * dl(t) + 2 * R_L * L * (dl(t))^2$ | bias point per channel from detectorConfig, ADC/A = 3.145728e+09
the current is the two-exponential FIT, refitted directly in amperes (model $A[\exp(-t/\tau_f) - \exp(-t/\tau_r)]$, 5 free params, pretrigger free in 16383+-3000); the raw trace is drawn only for reference
integration runs over the whole trace, 0 to 52.43 ms; for the fitted pulse this equals the closed-form integral, so the energy no longer depends on the window

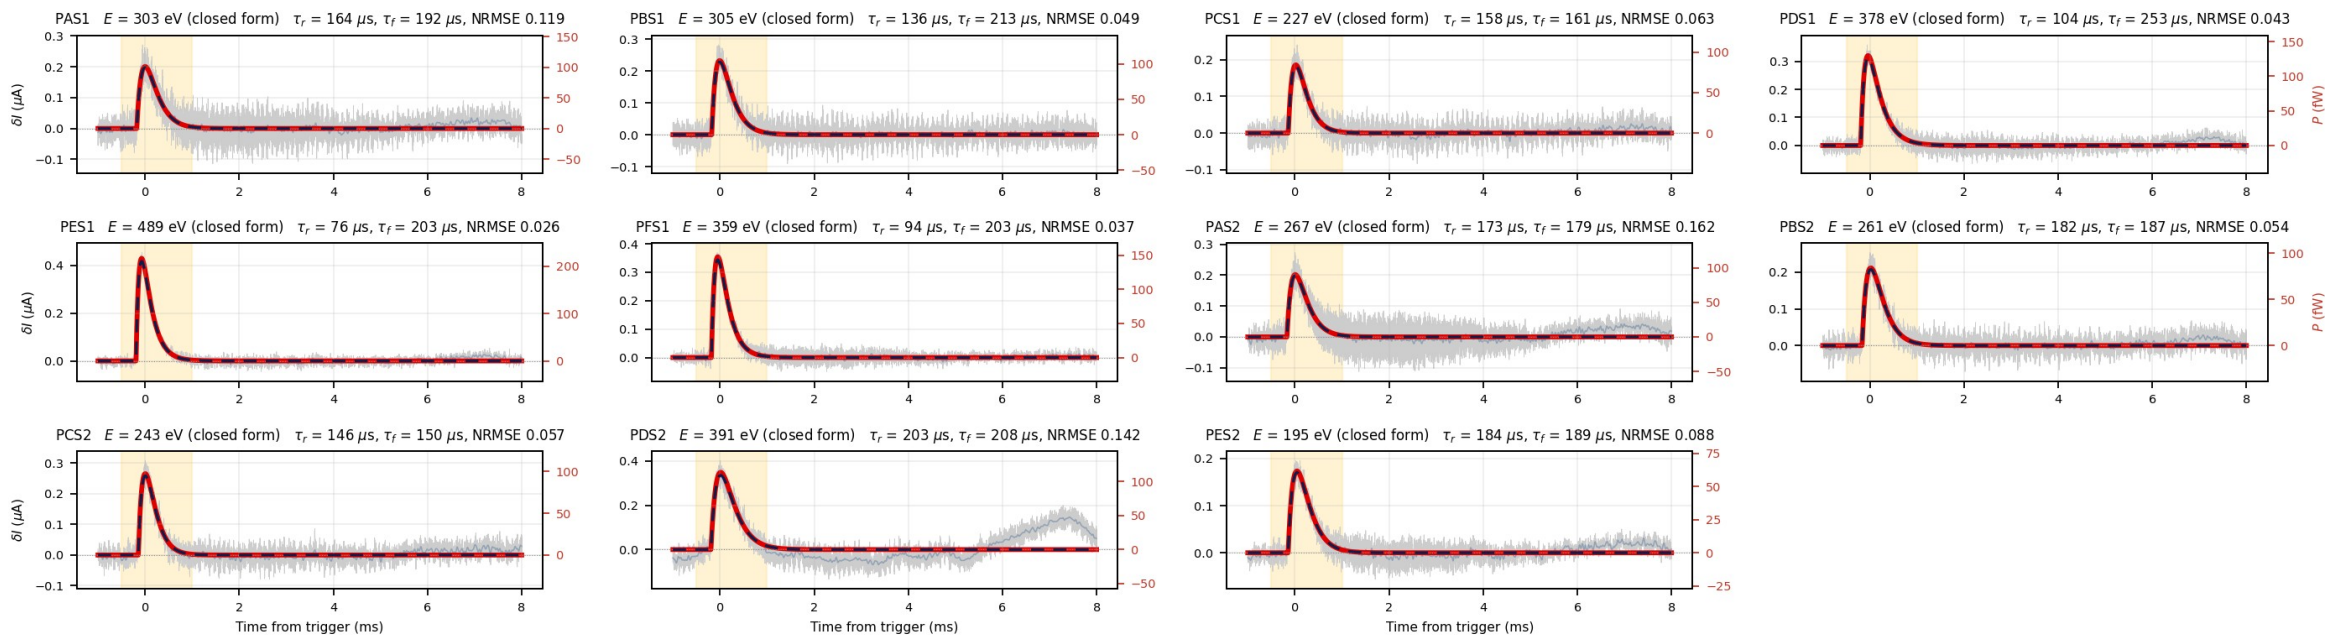

Backup — 每个通道的能量分布

Z7: energy of every K-line event, one panel per channel (30 series)

each entry is one event: its trace fitted with the two-exponential and the power integrated in closed form, method1 quadratic

the dashed curve is a Gaussian fit to the core, so its centre is the PEAK; these distributions are right skewed, so peaks must not be added (the plain means do add, to 3710 eV = 35.8% of the 10.37 keV K line)

