



Plattenelektrode als Leckagesonde, Typ EP (konduktiv) *mit allgemeiner bauaufsichtlicher Zulassung Z-65.40-191*

Die Plattenelektrode als Leckagesonde der Type EP ist vom „DIBt“ zur Überwachung von Auffangräumen, Auffangvorrichtungen, Kontroll- und Füllschächten zugelassen. Der Sondenkörper der EP besteht je nach Anforderung aus den Materialien PE, PPH, PVC, PTFE oder PVDF. Die Elektrodenspitzen sind aus Edelstahl 1.4571, Hastelloy B, Hastelloy C, Titan, Tantal oder Monell. Hierdurch ist die EP für den Einsatz bei hoch aggressiven Medien geeignet.

Die Elektrodenrelais ER-107..., ER-217... oder ER-145... (eigensicher Steuerstromkreis) liefern eine Messspannung, die über den in der konduktiven Elektrode eingebauten Widerstand, durch die Signalleitung einen Betriebsstrom fließen lässt. Steigt das leitfähige Medium bis zur Höhe der Elektrodenspitzen des Standaufnehmers an, wird ein Stromkreis geschlossen. Dies führt zu einem Umschalten der potentialfreien Ausgangskontakte am Elektrodenrelais. Um den unterschiedlichen Leitfähigkeiten der Flüssigkeiten gerecht zu werden, können die Elektrodenrelais ER-107..., ER-217... oder ER-145... in zwei unterschiedlichen Ansprechbereichen (1...30 k Ω / 6...90 k Ω) geliefert werden. Innerhalb dieser Bereiche ist der Ansprechwert mittels eines Potentiometers einstellbar.

Liegt eine Leitungsunterbrechung vor, werden die Ausgangskontakte (wie bei Alarm durch das Erreichen der Ansprechhöhe bzw. Spannungsausfall) umgeschaltet. Tritt ein Leitungskurzschluss auf, entspricht dies einer „Alarmmeldung“ (wie bei dem Erreichen der Ansprechhöhe). Das Elektrodenrelais arbeitet nach dem Ruhestromprinzip, d.h. bei einem Netzausfall schalten die Ausgangskontakte, wie beim Erreichen der Ansprechhöhe.

- Hohe chemische Beständigkeit
- Geringe Ansprechhöhe
- Einsatz in Kategorie 2 (Ex-Zone 1) mit ER-145...
- Leitungsüberwachung auf Kabelkurzschluss / Kabelbruch

Systemaufbau

Das Leckageanzeigesystem besteht aus der EP und den Elektrodenrelais ER-107..., ER-217... oder ER-145... (siehe Rubrik 10). Das Leckageanzeigesystem kann an unsere „Optisch Akustische Alarmgeber“ der Typenreihe OAA-107... angeschlossen werden (siehe Rubrik 01).

Plate Electrode as Leak Detector EP Type (Conductive) *with general approval for constructions Z-65.40-191*

The EP plate electrodes are approved by the DIBt (German Institute for Structural Engineering) for monitoring collecting basins, collecting devices, control and filling shafts.

The detector body of the EP is made of the materials PE, PPH, PVC, PTFE or PVDF, depending on requirements. The electrode tips are made of stainless steel, 1.4571, Hastelloy B, Hastelloy C, titanium, tantalum or Monell. Through this the EP is suitable for use with highly aggressive media.

The electrode relays ER-107..., ER-217... or ER-145... (intrinsically safe control circuit) supply a measuring voltage which allows an operating current to flow via the resistance built in the conductive electrode through the signal line. If the conductive medium rises to the height of the electrode tip of the level sensor, a circuit is closed. This causes a change-over of the voltage-free output contacts on the electrode relay.

In order to take into account different conductivities of the liquids, the electrode relays ER-107..., ER-217... or ER-145... can be supplied in two different response ranges (1...30 k Ω / 6...90 k Ω). Within these ranges the responding value can be adjusted by means of a potentiometer.

If a cable interruption occurs the output contacts are changed over (as for an alarm caused through reaching the response height or a voltage breakdown). If a cable short-circuit occurs this corresponds to an „alarm signal“ (as when the response height is reached). The electrode relay works according to the closed-circuit principle, i.e. in case of a power failure the output contacts switch as when reaching the response height.

- High chemical resistance
- Low response height
- Use in category 2 (Ex-zone 1) with ER-145...
- Line monitoring for cable short-circuit / cable break

System Construction

The leakage indication system consists of the EP and the electrode relays ER-107..., ER-217... or ER-145... (see section 10). The leakage indication system can be connected to our „optical acoustic alarm annunciator“ of the type series OAA-107... (see section 01).



EP

Technische Daten

Schutzart EN 60529 IP 68

Material Sondenkörper PPH, PVC, PE, PVDF, PTFE

Kabel TPK (Technisch Polymerer Kunststoff)

Auf Wunsch FEP (Teflon)
EX (YM2, Mischung auf PVC-Basis, blau)

Kabellänge auf Wunsch

Material Fühlerstäbe Edelstahl (1.4571), Hastelloy B, Hastelloy C, Titan, Tantal, Monell

Betriebstemperatur atmosphärisch

Betriebsdruck atmosphärisch

Widerstandswert der 22 kΩ / 100 kΩ

Leitungsüberwachung je nach Ausführung

Typenschlüssel

Grundbezeichnung

Material des Sondenkörpers

PP = Polypropylen
PE = Polyethylen
PV = Polyvinylchlorid
PT = Polytetrafluorethylen
PVDF = Polyvinylidenfluorid

Stabmaterial

VA = Edelstahl (1.4571)
HB = Hastelloy B
HC = Hastelloy C
TI = Titan
TA = Tantal
MO = Monell

Kabellänge in m

01 = 1 m
02 = 2 m usw.

Widerstand der Leitungsüberwachung

000 = kein Widerstand (ohne Prüfzeichen)
022 = 22 kΩ (mit Prüfzeichen)
100 = 100 kΩ (mit Prüfzeichen)

Kabelmaterial

ohne Angabe = TPK
FEP = Teflon
EX = YM2, Mischung auf PVC-Basis, blau

E □ □ □ □ □

Technical Data

System of protection EN 60529 IP 68

Material probe body PPH, PVC, PE, PVDF, PTFE

Cable TPK (Technical polymere plastic)

On request FEP (Teflon)
EX (YM2, mixture on PVC basis, blue)

Cable length on request

Material sensor rods Stainless steel (1.4571), Hastelloy B, Hastelloy C, Titanium, Tantalum, Monell

Operating temperature atmospheric

Operating pressure atmospheric

Resistance of the 22 kΩ / 100 kΩ

line monitoring according to the type

Type Key

Basic designation

Material of the leak detector

PP = Polypropylene
PE = Polyethylene
PV = Polyvinylchloride
PT = Polytetrafluorethylene
PVDF = Polyvinylidenfluoride

Rod material

VA = Stainless steel (1.4571)
HB = Hastelloy B
HC = Hastelloy C
TI = Titanium
TA = Tantalum
MO = Monell

Cable length in m

01 = 1 m
02 = 2 m etc.

Resistance of the line monitoring


000 = no resistance (without check symbol)
022 = 22 kΩ (with check symbol)
100 = 100 kΩ (with check symbol)

Cable material

without indication = TPK
FEP = Teflon
EX = YM2, (YM2, mixture on PVC basis, blue)

E □ □ □ □ □

Maßbild Dimensional Drawing

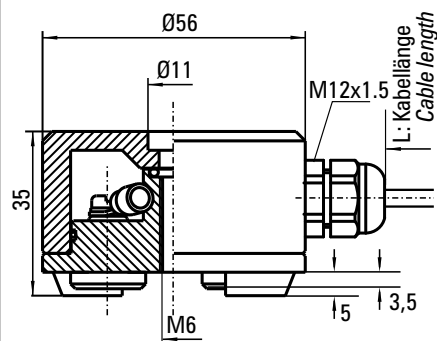

Bemaßung in mm / Dimensioning in mm

Irrtümer und Änderungen vorbehalten.

Subject to change without prior notice, errors excepted.