

USBprog User's Manual

Bernhard Walle*

1st January 2010

*bernhard@bwalle.de

Contents

1	Overview	3
1.1	The USBprog Hardware	3
1.2	The USBprog Software	3
1.3	About this Document	4
1.4	Terms and Definitions	4
1.5	Getting Support	4
2	Getting Started with the Hardware	6
2.1	Connectors, Jumpers and LEDs	6
2.1.1	Connectors	6
2.1.2	Jumpers	6
2.1.3	LEDs	8
2.2	Initialise the Hardware	8
2.2.1	Check if the Bootloader is Installed	8
2.2.2	Flashing the Bootloader	8

1 Overview

1.1 The USBprog Hardware

If you read this document, you have probably already an USBprog device. In the past, every microcontroller has its own programming hardware that is mostly relatively expensive. If you work with multiple microcontroller environments, you end up with plenty of programmers on your desk that are not only expensive but also waste space.

On the other side, most self-built programming hardware (for example several ISP programmers for the Atmel AVR controllers) was for the parallel port. However, modern PCs have no parallel port. While you can extend a PC with a parallel port PCI card, you're lost on notebooks. Building and programming USB hardware is not really difficult but still more work than for the parallel port.

The most important thing is the firmware. Once programmed with a so-called *bootloader* the firmware can be exchanged. While it's necessary to have an ISP programming device¹ once to program the USBprog, a normal PC or Mac with the *USBprog software* is sufficient to change the firmware. So it takes only a few seconds to make a JTAG device from an Atmel MTK II clone, for example.

Warning: This document only describes the USBprog hardware in version 3.0. If you still have an USBprog 2.0 device, please refer to the online documentation! If you are unsure, look at picture [2.1 on page 6](#).

1.2 The USBprog Software

As already mentioned in the section above, you need a special PC software to exchange the firmware of the USBprog. This software is available as both GUI and command line version that can be also used in scripts and Makefiles. For following systems are supported:

- Microsoft Windows 2000 and XP
- Linux (tested on openSUSE and Ubuntu)
- MacOS X (tested on Leopard)

¹That can be a second, already initialised USBprog or another ISP programmer.

If you use another Unix system such as OpenSolaris or *BSD, chances are high that the software runs out of the box as long as a port of *libusb* is available.

Note: It's known that the software doesn't run in Windows Vista and Windows 7 has not been tested. If you use one of that operating systems, we recommend using a virtual machine (for example VirtualBox which is free for personal use) with a Linux installation in it.

1.3 About this Document

This documentation should be both: A guide to get started for people that just bought the hardware and want to install the software and use the hardware and also a reference documentation for both the software and the most common firmwares.

If you have any suggestions how to improve the software and the documentation or if you just find problems, please don't hesitate to contact the author via e-mail at bernhard@bwalle.de. However, I probably cannot help with hardware or firmware problems. In that case, please contact the developer of USBprog which is Benedikt Sauter (sauter@embedded-projects.net).

1.4 Terms and Definitions

At first we introduce the term *firmware* and *bootloader* as we use it in the rest of the document.

Firmware The main advantage of the USBprog device is that the firmware can be exchanged. The firmware is the program which is loaded into the flash memory of the USBprog device and which is used to perform a specific task: Programming AVR microcontrollers, emulating a JTAG debugger and so on.

Bootloader While the main firmware is exchanged with the computer program, the flash contains also a part (at the highest possible location) that can load the other firmware part. This part is—in the ideal world—only loaded once into the USBprog flash and then never gets overwritten.

1.5 Getting Support

If you have problems with the document here, there are several places where you can get support:

1. There's a web-based forum at <http://forum.embedded-projects.net> which is quite well-visited. Also the guy who has developed USBprog, Benedikt Sauter, reads that forum regularly.
2. Additionally, there's also a mailing list at Berlios (usbprog-pub@lists.berlios.de). You can subscribe, unsubscribe or read the archive at <https://lists.berlios.de/pipermail/usbprog-pub/>.

3. For general questions about microcontroller programming, <http://www.mikrocontroller.net> is always worth looking at. There are also plenty of USBprog users out there.
4. Especially for problems with the USBprog software, you can also send me an email directly at bernhard@bwallo.de.

2 Getting Started with the Hardware

2.1 Connectors, Jumpers and LEDs

At first we have to introduce the jumpers, connectors and LEDs which we talk about in the next sections. All figures in that document are meant to be drawn in the same perspective (USB connector on the right) as figure 2.1.

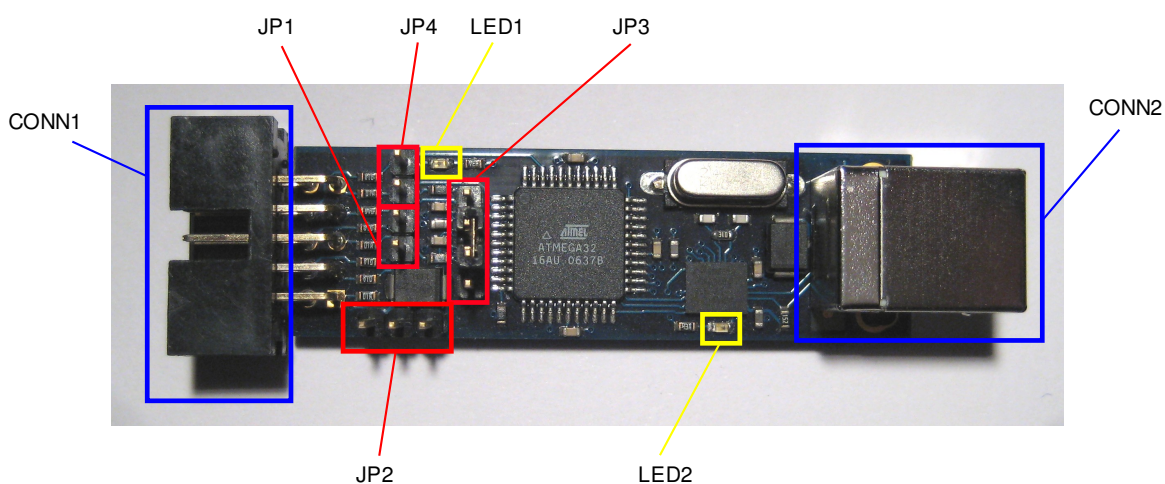


Figure 2.1: The USBprog device (version 3.0) with all connectors, jumpers and LEDs

2.1.1 Connectors

CONN1 is the output interface which is used to do something useful with the USBprog beside from blinking LEDs. For example if you use the *avrispmk2* firmware, this is an ISP interface which is used to program microcontrollers.

CONN2 is obviously the USB connector which is used to connect your USBprog to the computer. You have to use a *Type B* cable which is the normal cable to connect USB devices—apart from micro or mini USB.

2.1.2 Jumpers

JP1 (the lower two of the four pins) is the jumper that must be connected if the bootloader of the USBprog should be updated. See also section 2.2 on [page 8](#) how to flash the bootloader.

JP2 controls how the power supply of the circuit that should be programmed (connected to **CONN1**). Figure 2.2 shows the possible connections:

The default is no power supply for the programmed circuit. In that case you must ensure that the device is supplied with power by other means. This is the safest possibility.

If you connect the two leftmost pins, that means that the 5 V VCC is directly from the USB port. This setting is dangerous because an error (short-circuit) in your circuit can damage the computer.

An alternative is the setting of the two leftmost pins: In that case, the 5 V VCC is not directly from the USB port but with a Schottky diode. This is safer than the direct connection.

JP3 has two functions: At first it can be used as 5 V serial interface for debugging. You cannot directly connect this jumper to the computer but you need some level converter in between¹. This functionality is only needed by firmware developers.

More important is another function which is used by the bootloader at startup. To put the device in update mode, disconnect the device, then connect pins 2 and 3 as shown in figure 2.3 and connect the device again.

JP4 is application specific, i. e. used directly by the firmware that is flashed into the USBprog. Currently, **JP4** is not used by any of the public firmwares.

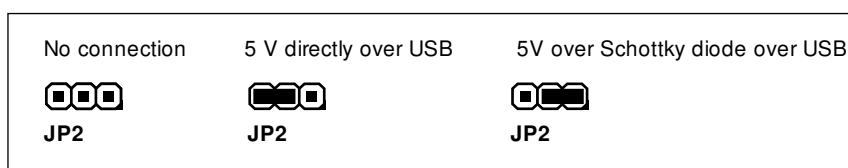


Figure 2.2: Possible connections of **JP2**

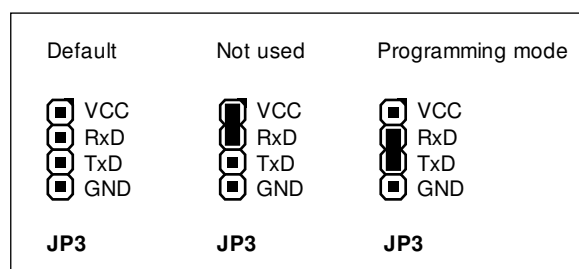


Figure 2.3: Possible connections of **JP3**

¹If you want to build such a level converter yourself, look for example at <http://www.nslu2-linux.org/wiki/HowTo/AddASerialPort>. If you want to buy such a cable in Germany, the [Embedded Project Shop](#) also has one. Look for "FTDI-Kabel TTL-232R USB zu TTL serielles Kabel (5.0 V)".

2.1.3 LEDs

LED1 (red) is used by the firmware. There are two common scenarios:

If the USBprog is in *update mode*, the LED blinks slowly. In the wide-spread Atmel MTK II clone firmware, this LED shines while the programming of the microcontroller is ongoing.

LED2 (green) is just the Power LED.

2.2 Initialise the Hardware

This section describes how to install the bootloader. If you bought a version of USBprog which already contains the bootloader, you can safely skip that step. If you don't know if you have a version with bootloader, please read section [2.2.1](#).

2.2.1 Check if the Bootloader is Installed

2.2.2 Flashing the Bootloader

When buying a USBprog at the [Embedded Projects Webshop](#) you can choose between a slightly cheaper version without an already flashed bootloader and a slightly more expensive version that already has flashed the bootloader.

Flashing the bootloader is the only step where you need a second programming device. It's possible to use an already initialised USBprog with the "AVRISP mk2 Clone" firmware flashed. Any other programmer for Atmel AVR microcontrollers will do it, too. You need the standardised *ISP* interface.

In the rest of the document we assume that you have already a USBprog and you want to initialise a second one. It should be easy to use that description for another programmer since the *AVRdude* software supports basically every AVR programmer that is out there.