

SOVY

# Digital Calculator PO1\_DGC\_HSI

Nihal Khaled  
Nour El Gammal

## Table of Contents

1. Document Status .....	2
2. Document History .....	2
3. Reference Documents .....	2
4. Project Description .....	3
5. System Context Diagram .....	3
6. System Requirements .....	4
7. Hardware features.....	6

## 1. Document Status

Name	SOVY
Version	1.0
Status	Proposed
Author	NK,NM
Date	13/2/2021

## 2. Document History

Version	Author	Date	Change
1.0	NK, NM	13/2/2021	Initial Creation
1.1	NK, NM	14/2/2021	Updating the system context diagram


### 3. Reference Documents

Ref. No.	Doc. Name	Version	Status
1	PO1_DGC_CR_DigitalCalculator	1.0	Released

### 4. Project Description

“Sovy” is a simple digital calculator which consists of a keypad which contains all the buttons required to perform any basic mathematical operations and a LCd-screen to displays the operation. A tune is generated from a buzzer every time the user presses a key.

### 5. System Context Diagram

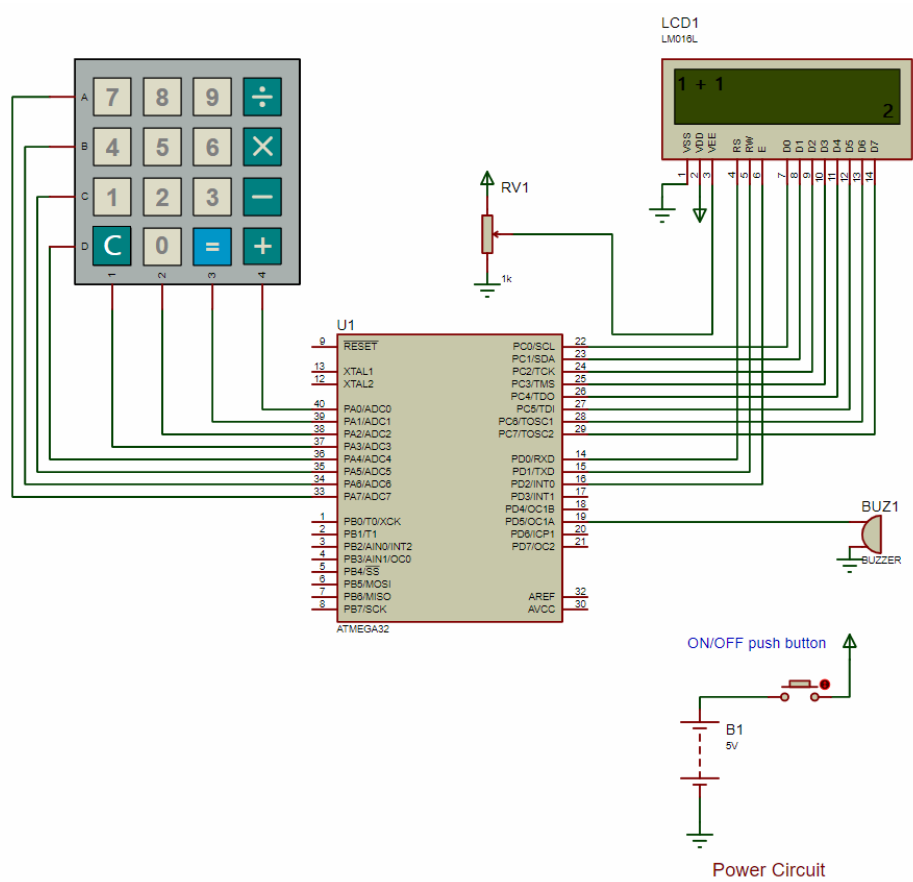

Req_ID	Req_1ST123_HSI_overall_001-V1.0	Covers	Covers_1ST123_CR_01-V1.0
Description:	<p>The Keypad(4x4) in total contains 16 keys, each of one is used to send a particular input to the microcontroller as required by the user. 10 keys are used for numbers from 0 to 9. 4 keys are used for addition, subtraction, multiplication, division. Each row and column in the keypad has a separate pin which is connected to separate pin on the Atmega32 microcontroller.</p> <p>There is also a switch that is responsible for switching the system on/off (Lcd &amp; Keypad).</p>		

Req_ID	Req_1ST123_HSI_overall_002-V1.0	Covers	Covers_1ST123_CR_02-V1.0
Description:	<p>A key press is detected using polling based method. Initially, all the rows and columns are logic high. Each row is made logic low one by one. And the corresponding column which is made logic low, by a key press, is detected. The detected row and column numbers are scanned in the array(software) which return the corresponding number entered assigned to the pressed key.</p>		

Req_ID	Req_1ST123_HSI_overall_003-V1.0	Covers	Covers_1ST123_CR_03-V1.0
Description:	<p>An LCD Display of 16x2 characters is used to display the output of this project. The LCD Display was directly interfaced to the microcontroller. It will output any data fed to it on its data lines.</p> <p>An LCD contains the following pins:</p> <ol style="list-style-type: none"> <li>1. Vdd : The supply voltage of the LCD. 5V DC is supplied from the Microcontroller to this pin to turn on the LCD.</li> <li>2. Vss : The Ground Connection of the LCD. It is connected to the ground.</li> <li>3. Vo : The Contrast Control Pin. It is connected to a potentiometer in order to control the contrast for the display.</li> <li>4. R/W pin: This pin is used to select between the Read and Write Option of the LCD. When this pin is made logic low, a write operation is performed and data is sent from the microcontroller to the LCD using the D0-D7 pins. When this pin is set high, a read operation is performed and data is sent from the LCD to the microcontroller using the D0-D7 pins on the LCD.</li> </ol>		

	<p>5. Register Select pin: This pin is used to select whether to send data to display or perform some command on the LCD. When this pin is set high, a write operation will send data onto the data register for displaying on the LCD. When this pin is set low, a write operation will send some LCD specific command to be performed on the LCD.</p> <p>6. Enable Pin: This pin is used to enable the LCD. It is operated on the rising edge of a pulse. When data is fed onto the data lines and the R/W pin set, application of a short pulse will result in data being sent to the LCD.</p> <p>7. Data pins: These 8 pins are used as a bus to send or receive data between the microcontroller and the LCD.</p> <p>8. A(Led positive) pin is connected to 5v.</p> <p>9. K (Led negative) pin is connected to ground.</p>
--	---

Req_ID	Req_1ST123_HSI_overall_004-V1.0	Covers	Covers_1ST123_CR _03-V1.0
Description:	When a particular row is set low, and happens that the 1 <sup>st</sup> operand of the operation to be in this row and is pressed, the corresponding column is set low and a key press, is detected. By that time, the LCD will be initialized and ready for receiving data. Then, it will be displayed on the LCD. Similarly, the operator and the 2 <sup>nd</sup> operand will also be displayed. And by pressing the equal key, the result will be displayed.		

Req_ID	Req_1ST123_HSI_overall_005-V1.0	Covers	Covers_1ST123_CR _04-V1.0
Description:	When any key in the keypad is pressed, it will generate a high pulse when it is released, which will turn the buzzer on.		

## 7. Hardware features

Hardware Component	Features
1- LCD	<p>This 16x2 LCD display has the outline size of 80.0 x 36.0 mm and VA size of 66.0 x 16.0 mm and the maximum thickness is 13.2 mm. WH1602W 16x2 LCD Displays are built-in controller ST7066 or equivalent. It is optional for + 5.0 V or + 3.0 V power supply. The LEDs can be driven by pin 1, pin 2, or pin 15 pin 16 or A/K.</p>
2- Keypad	<p>A 4x4 keypad will have eight terminals. in them four are rows of matrix and four are columns of matrix. these 8 pins are driven out from 16 buttons present in the module. those 16 alphanumeric digits on the module surface are the 16 buttons arranged in matrix formation.</p> <ul style="list-style-type: none"> <li>• Maximum voltage across each segment or button: 24v.</li> <li>• Maximum current through each segment or button: 30mA.</li> <li>• Maximum operating temperature: 0°C to + 50°C</li> </ul>
3- Microcontroller	<p>ATmega32, low-power Microchip 8-bit AVR RISC-based microcontroller combines 32 KB ISP flash memory with read-while-write capabilities, 1 KB EEPROM, 2 KB SRAM, 54/69 general purpose I/O lines, 32 general purpose working registers, a JTAG interface for boundary-scan and on-chip debugging/programming, three flexible</p>

	<p>timer/counters with compare modes, internal and external interrupts, serial programmable USART, a universal serial interface (USI) with start condition detector, an 8-channel 10-bit A/D converter, programmable watchdog timer with internal oscillator, SPI serial port, and five software selectable power saving modes. The device operates between 1.8-5.5 volts.</p>
4- Buzzer	<ul style="list-style-type: none"> <li>• Rated Voltage: 6V DC</li> <li>• Operating Voltage: 4-8V DC</li> <li>• Rated current: &lt;30mA</li> <li>• Sound Type: Continuous Beep</li> <li>• Resonant Frequency: ~2300 Hz</li> </ul>