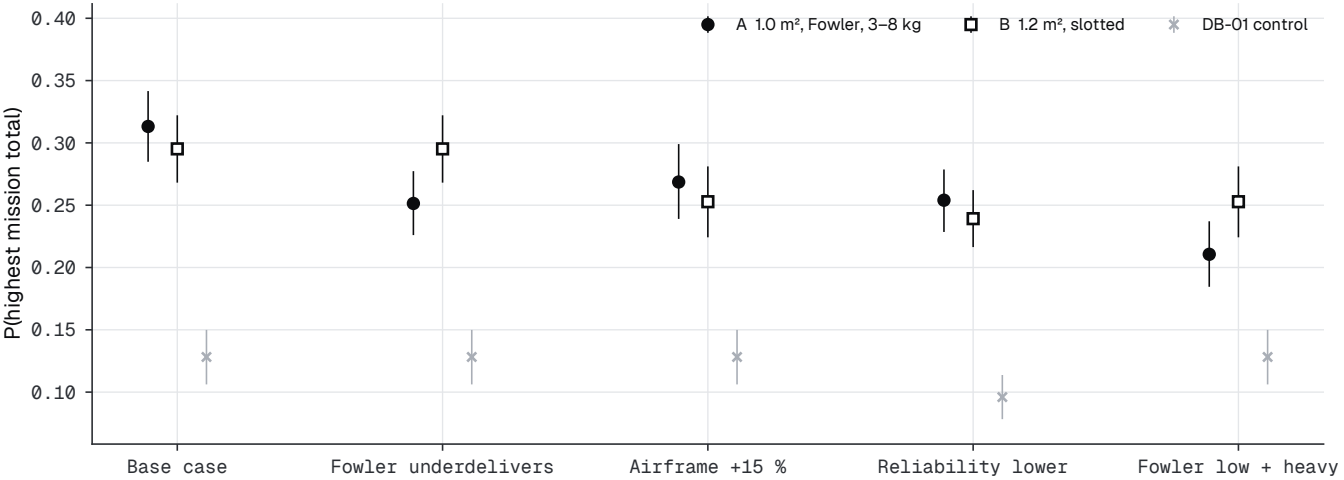
A 1.0 m², Fowler, 3–8 kg
B 1.2 m², slotted
DB-01 control
P(highest mission total)
0.40
0.35
0.30
0.25
0.20
0.15
0.10
Base case
Fowler underdelivers
Airframe +15 %
Reliability lower
Fowler low + heavy