Quadratic lift of a 63-bit prime coset input

Exact formulation and planted-input check, 2026-10-17 UTC. A target-blind 380-point factor base lies in a 788-element multiplicative coset. Replacing each x^788 = g^788 equation with a twelve-gate square-and-multiply chain reduces maximum input degree from 788 to 4, including the retained S3 chain. The new variables and equations may make solving harder; no degree-of-regularity or runtime result has been obtained.

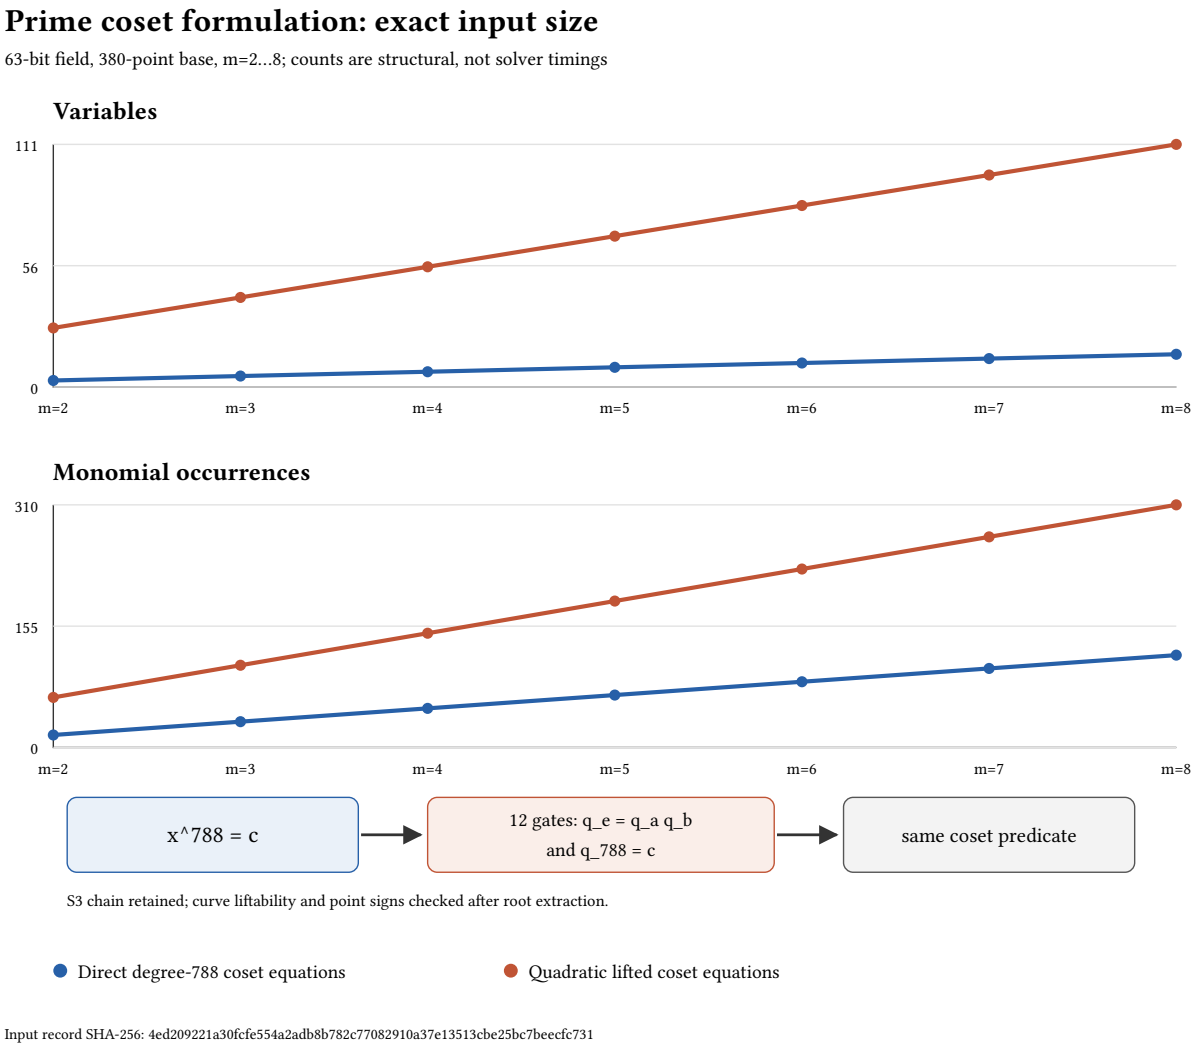

Input record SHA-256: 4ed209221a30fcfe554a2adb8b782c77082910a37e13513cbe25bc7beecfc731

At m=8, the direct system has 15 variables, 16 equations and 118 monomial occurrences. The lifted system has 111 variables, 112 equations and 310 monomial occurrences. These counts are serialized input sizes, not Gröbner matrix sizes. The formulation is a chained-S3 system with eight summands; it is not a direct S8 computation.

For this 380-column base, signed multisets bound uniform-target coverage by binomial(760+m−1, m)/r. At m=7 the ceiling is 0.323848%; at m=8 it is 31.048916%. Collisions can only lower these values. Extra target shifts, bases, or another complete-target method need explicit cost accounting.

Independent check

The archived planted point sum satisfies all 16 direct and 112 lifted equations in an independent SageMath 10.10.rc0 evaluator. Changing one auxiliary value violates two equations. Of 788 coset x-values, only 380 lift to points on the chosen curve, so roots require point checking. A separate two-variable Gröbner diagnostic worked over the 63-bit field; it says nothing about whether the m=8 system is tractable.

Required next comparison

A frozen trial should compare direct and lifted inputs on the same base and targets, with equal-realized-size random and small-x controls, bounded solver time and memory, root certificates, useful rank, complete setup, linear algebra, unseen target recovery, and matched rho. Censored solver attempts remain censored. The companion Markdown report links the exact system JSON, source, independent replay, and raw capability output.