


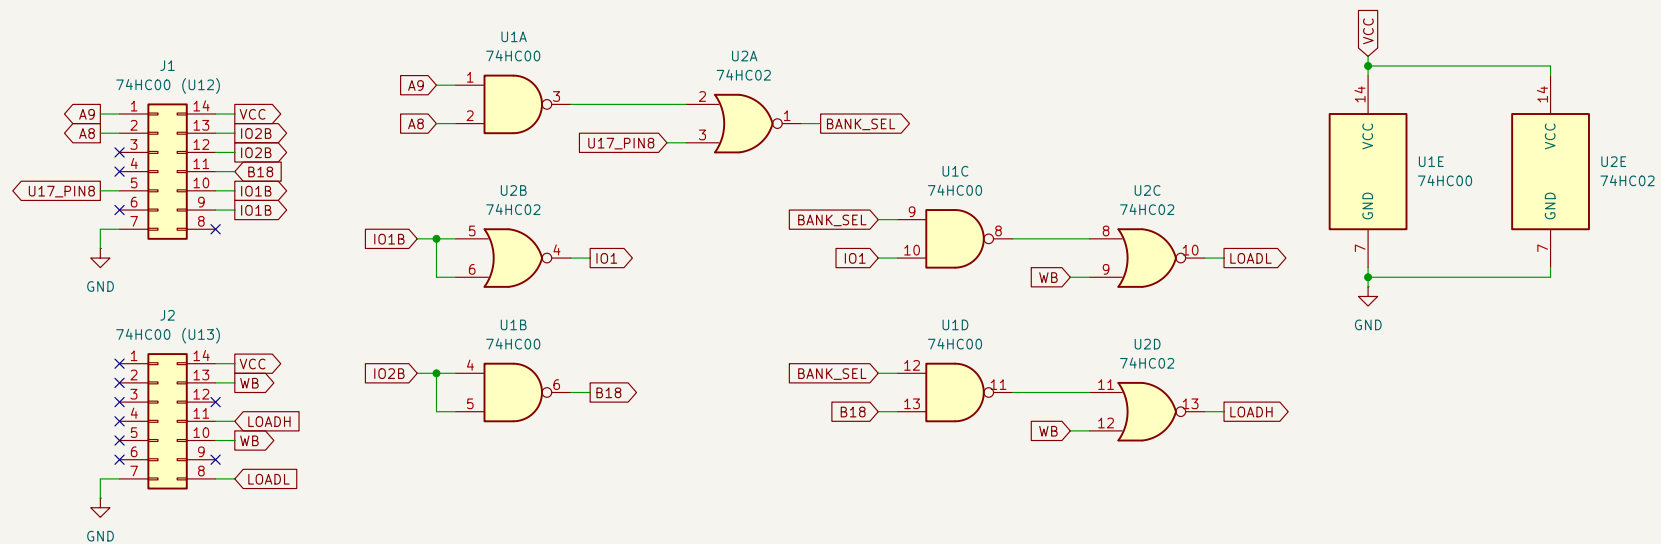

Fitting: take the 74HC00s out of U12 and U13 on the Rev 1.0 ACE Board. J1 plugs into U12's socket and J2 into U13's. Both sockets face the same way, and U13's pin 1 is 23.00 mm from U12's pin 1 along the row, so J2 sits 23.00 mm from J1 on the patch.

LOADL and LOADH go high only on a write to the bank register, \$B3FF or \$B7FF, while PHIZ is high: A9·A8·(A0–A7 all ones), with IO1 for LOADL and B18 for LOADH, and /WB. U17_PIN8 is the 74HC30's output, /(A0–A7).

A.C. Wright Design

Sheet: /
File: ACE RAM Patch.kicad_sch

Title: ACE RAM Patch

Size: A4 Date: 2026-09-24

KiCad E.D.A. 10.0.3

Rev: 1.1

Id: 1/1