


Day-11: Static Route

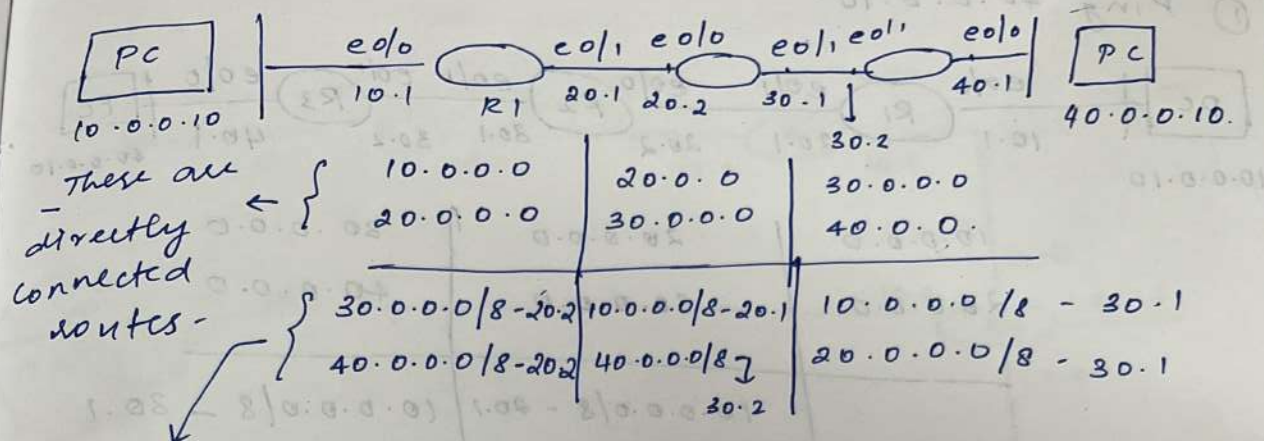

These are called static routes. The routes which we add manually in the routing table.

How to write static routes?

- First add the network ID's of missing routes & prefix.
 - Now give gateway as next hop.
 - We have to check both left & right before giving the gateway.
 - For R2, 10.0.0.0 → check left → 20.1 (next hop)
 - 40.0.0.0 → check right → 30.2 (next hop).
- Command for static route:


ip route ip address subnet mask gateway

Eg: ip route 30.0.0.0 255.0.0.0 20.0.0.2

H/W:

Day-12

① Ping 40.0.0.10

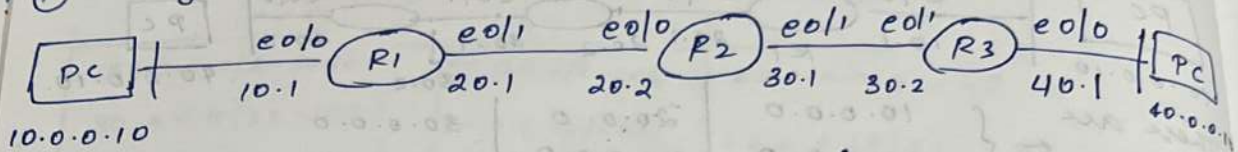

10.0.0.0	20.0.0.0	30.0.0.0
20.0.0.0	30.0.0.0	40.0.0.0
10.0.0.0/8 - 20.1		10.0.0.0/8 - 30.1
40.0.0.0/8 - 20.2		40.0.0.0/8 - 30.2

Yes we can ping 40.0.0.10 from 10.0.0.10, because after echo data is generated it goes to switch → R1 (there is route) → R2 → R3 → PC. Now response will be given from PC2 with destination as 10.0.0.10 → R3 → R2 → R1 → PC-1. Reply is also given. So we can ping

②. Ping 20.0.0.2 → But delete all static routes.

No we cannot ping. In R1, there is route for 20 network but in R2 there is no route for 10 network in directly connected routes. So 20.0.0.2 cannot be pinged.