


Day-12 Static Route - II

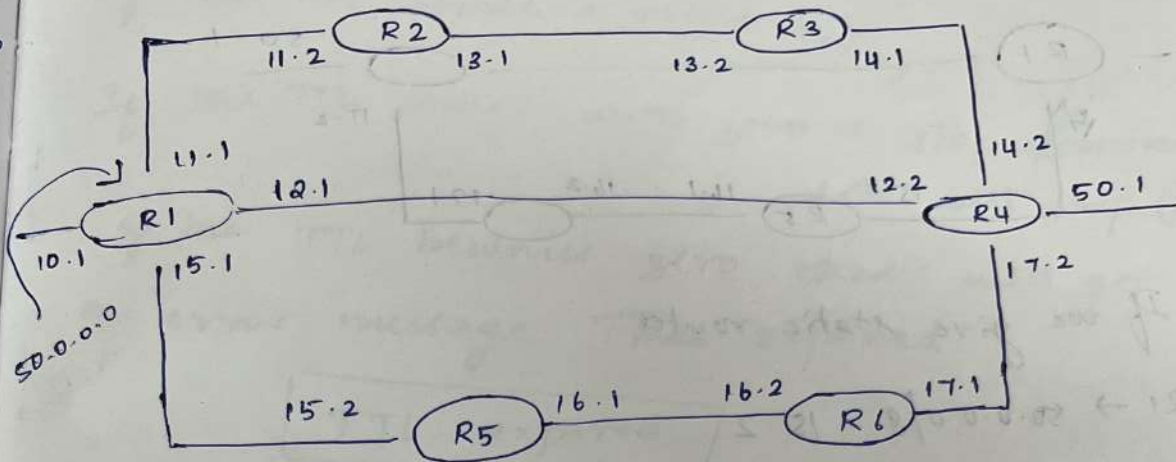

→ Without giving static routes we cannot ping directly

If we give static routes for R1,

$50.0.0.0/8 - 11.2$

$50.0.0.0/8 - 12.2$

$50.0.0.0/8 - 15.2$

There are three routes with same matching bits so now it will decide to do load sharing.

(X)


If a data is sent to router, it will check destination IP in routing table, if multiple routes are there then we should see highest matching bits. If it is same then load sharing.

(X)

algorithm

Load sharing → [per destination] - maths function
Based on maths function it will send to either one route.

For each
reduced



7

۱۴

a

Dg
—


10

win-128

Linux - 64

Cisco - 255

It is a value

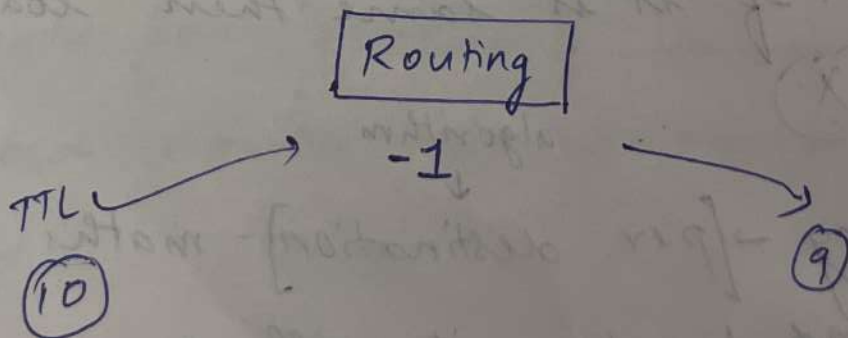

For each routing process it will be reduced by 1 value.


If the TTL comes a value

If the TTL comes with zero $\rightarrow$ stop looping, data will drop.

If the TTL becomes zero then will get a error message: Time expired.

TTL expired.

Day-13 Routing in depth. (X) Ping 40.0.0.10

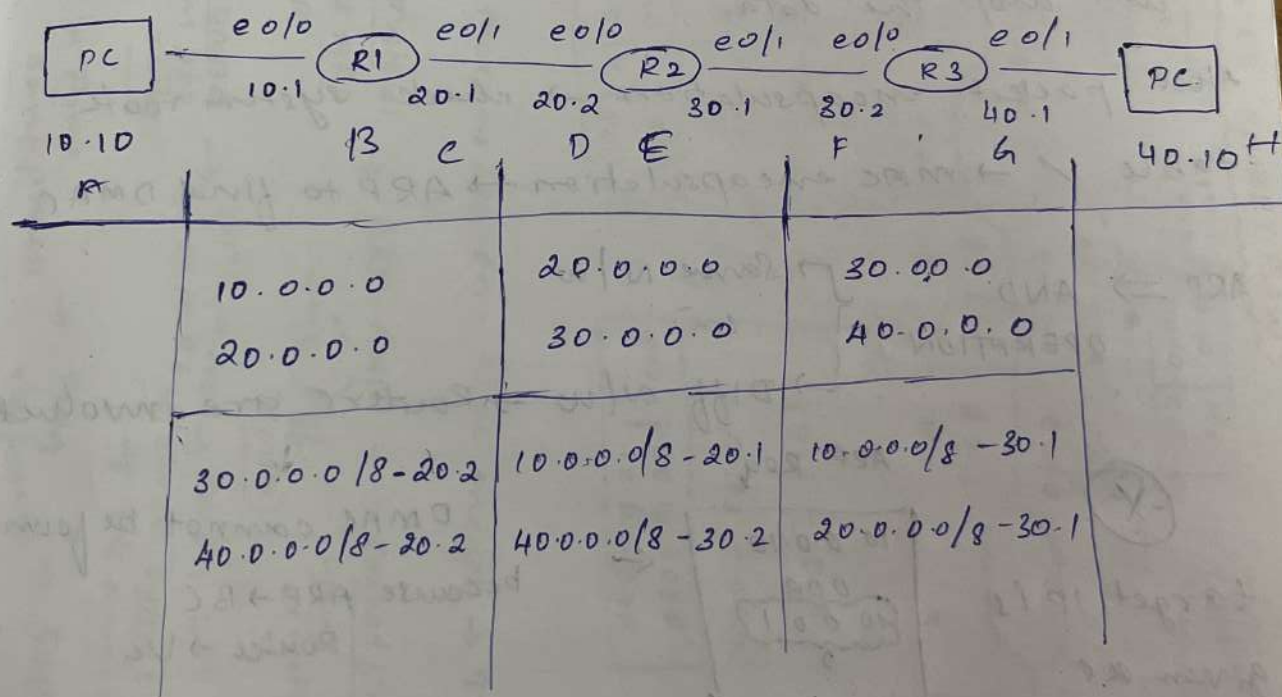

If we ping 40.0.0.10 echo $\rightarrow$ Format & time encaps. $\rightarrow$ packet encapsulation $\rightarrow$ check system route table $\rightarrow$ MAC encaps. $\rightarrow$ Dest. MAC? $\rightarrow$ ARP REQ $\rightarrow$ But ARP is broadcast, Router is unicast, so we cannot find destination MAC directly. In ARP Req. put default gateway as target IP.