# Device: BMD HyperDeck



#### Introduction

The Device Core "BMD HyperDeck" can be used to control

- HyperDeck Studio Mini
- HyperDeck Studio
- HyperDeck Studio Pro

A number of parameters on the Blackmagic HyperDeck series can be controlled from a SKAARHOJ control panel via IP. The Device Core "BMD HyperDeck" is used to control the different models.

### **Gang Recording:**


We have only tested with up to 4 x HyperDecks (**see video**). In theory our units can control up to 8 Devices but performance on our units might decrease each time you add a Device Core. For gang recording we cannot guarantee frame accuracy start/stop of recordings. It depends when the command reaches the HyperDeck and there might be an offset resulting in recording not starting/stopping at the exact same time.

The implementation is done on HyperDeck V. 6.0


#### **Known Issues:**


Currently the jog/shuttle feature is not implemented and there is an offset in displaying filenames. Work in progress.

This is a table of actions for Blackmagic Design HyperDeck Studio Recording decks.

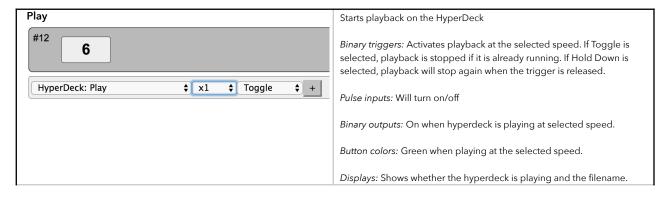


# SKAARHOJ DEVICE CORES

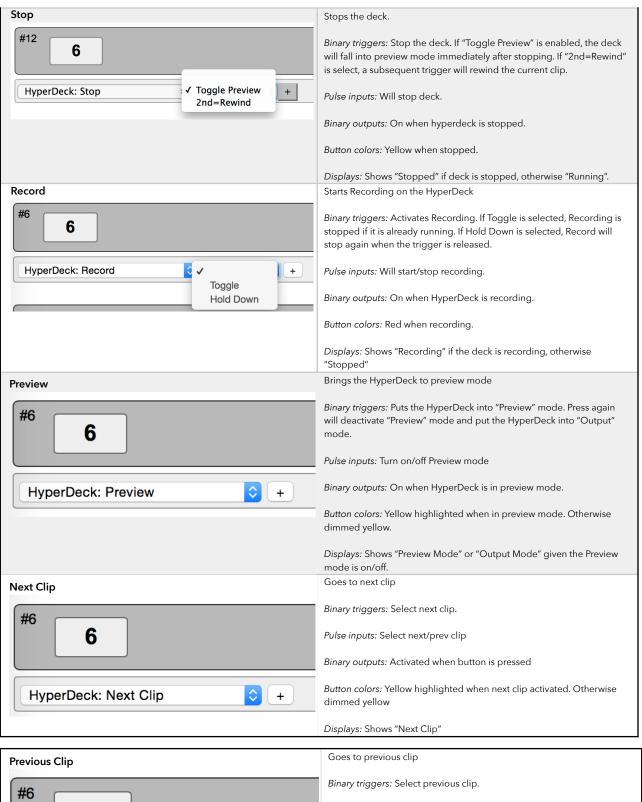

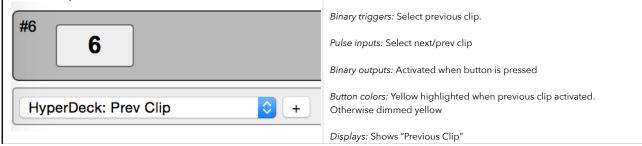

# SKAARHOJ DEVICE CORES

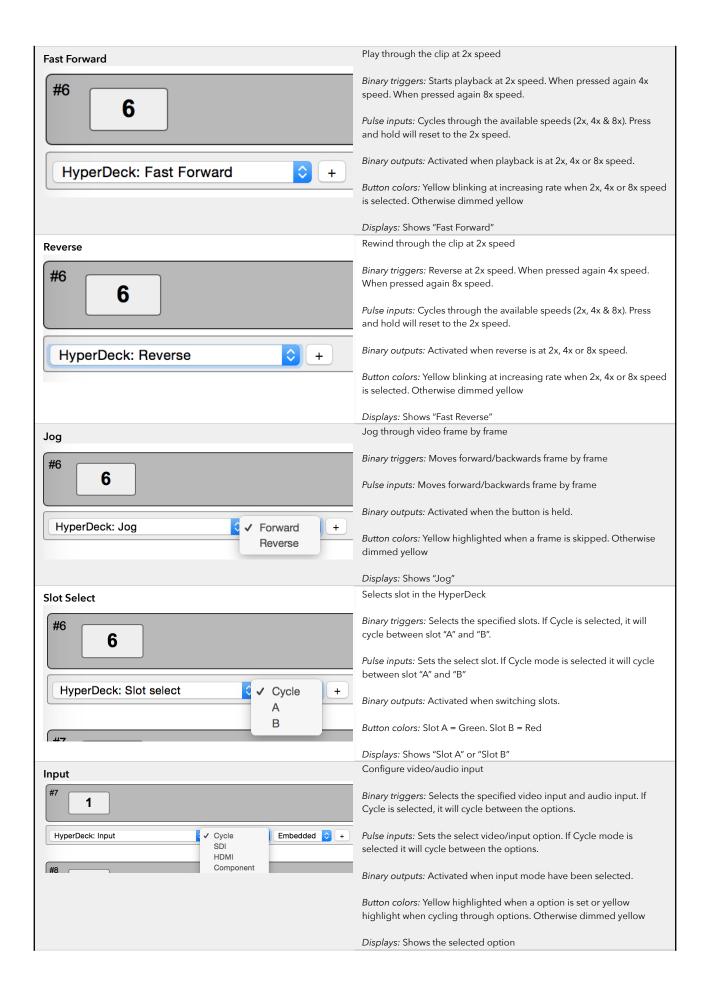

# SKAARHOJ DEVICE CORES

