





PC-B
Physical
Config
Desktop
Programming
Attributes
Web Browser
X
<
>
URL
http://www.devasc-netacad.pka
Go
Stop
Top


Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>   ping 127.0.0.1
Pinging 127.0.0.1 with 32 bytes of data:
Reply from 127.0.0.1: bytes=32 time<1ms TTL=128
Reply from 127.0.0.1: bytes=32 time=4ms TTL=128
Reply from 127.0.0.1: bytes=32 time=12ms TTL=128


PC-B
Physical
Config
Desktop
Programming
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
FastEthernet0
Bluetooth
Global Settings
Display Name
PC-B
Interfaces
FastEthernet0
Gateway/DNS IPv4
DHCP
Static
Default Gateway
172.16.3.1
DNS Server
64.100.0.10
Gateway/DNS IPv6
Automatic
Static
Default Gateway
DNS Server
Device Clock:
12:04:35 Mon Mar 1 1993 UTC
NTP
Server Ip:
Authentication
Enable
Disable
Password:
PTP
Profile
Power
Enable
Disable
Top



PC-B
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
172.16.3.2
Subnet Mask
255.255.255.0
Default Gateway
172.16.3.1
DNS Server
64.100.0.10
IPv6 Configuration
Automatic
Static
IPv6 Address
/
Link Local Address
FE80::207:ECFF:FED5:CA76
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top

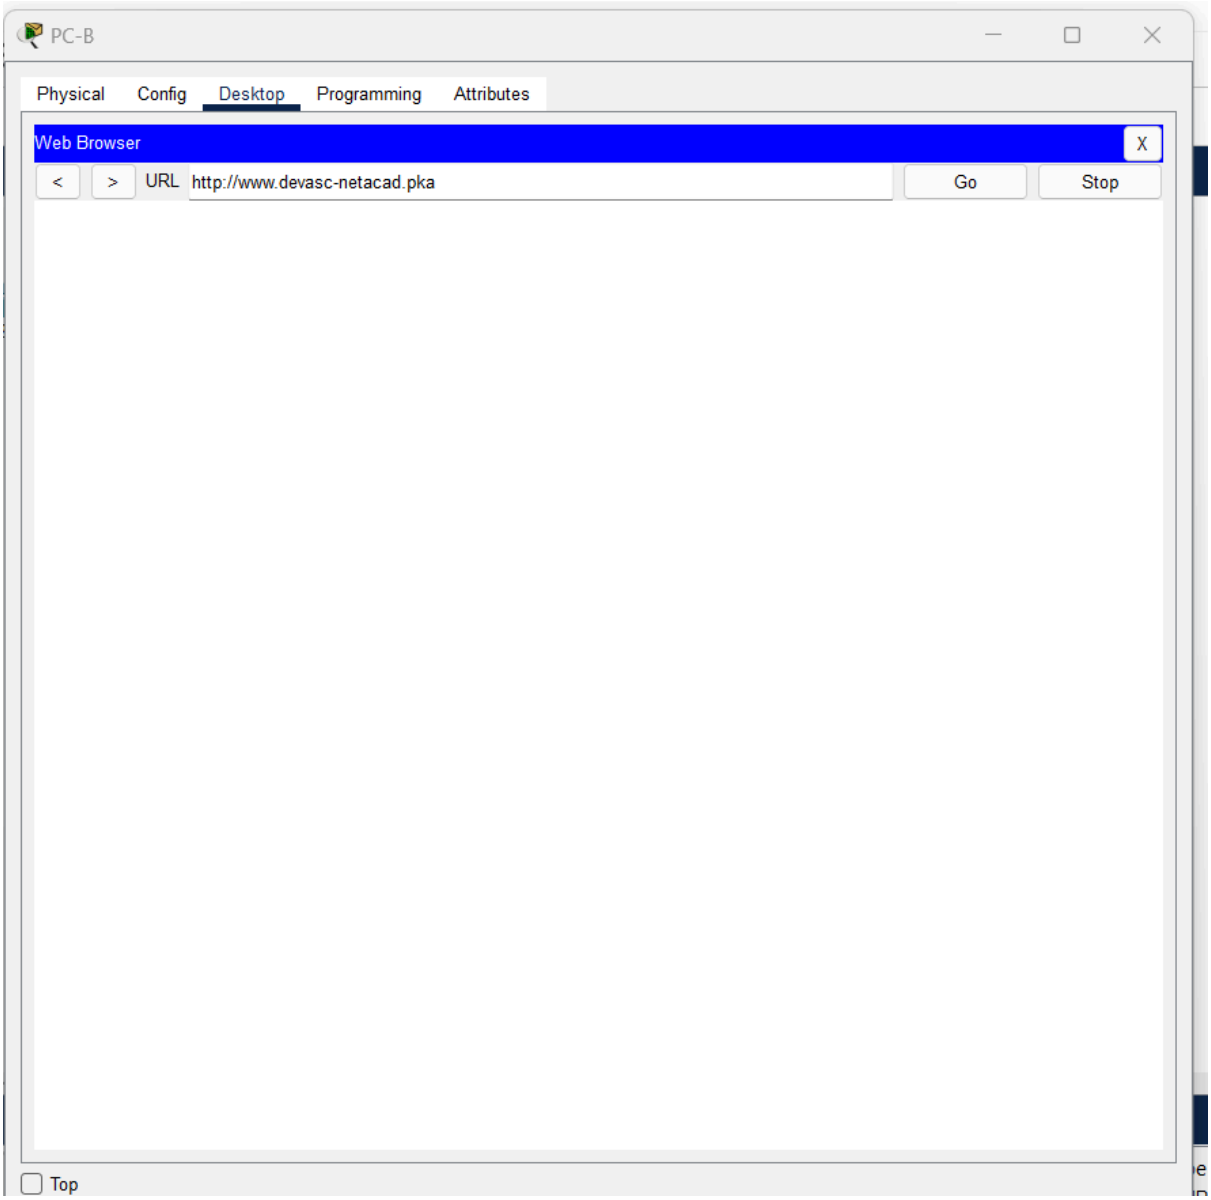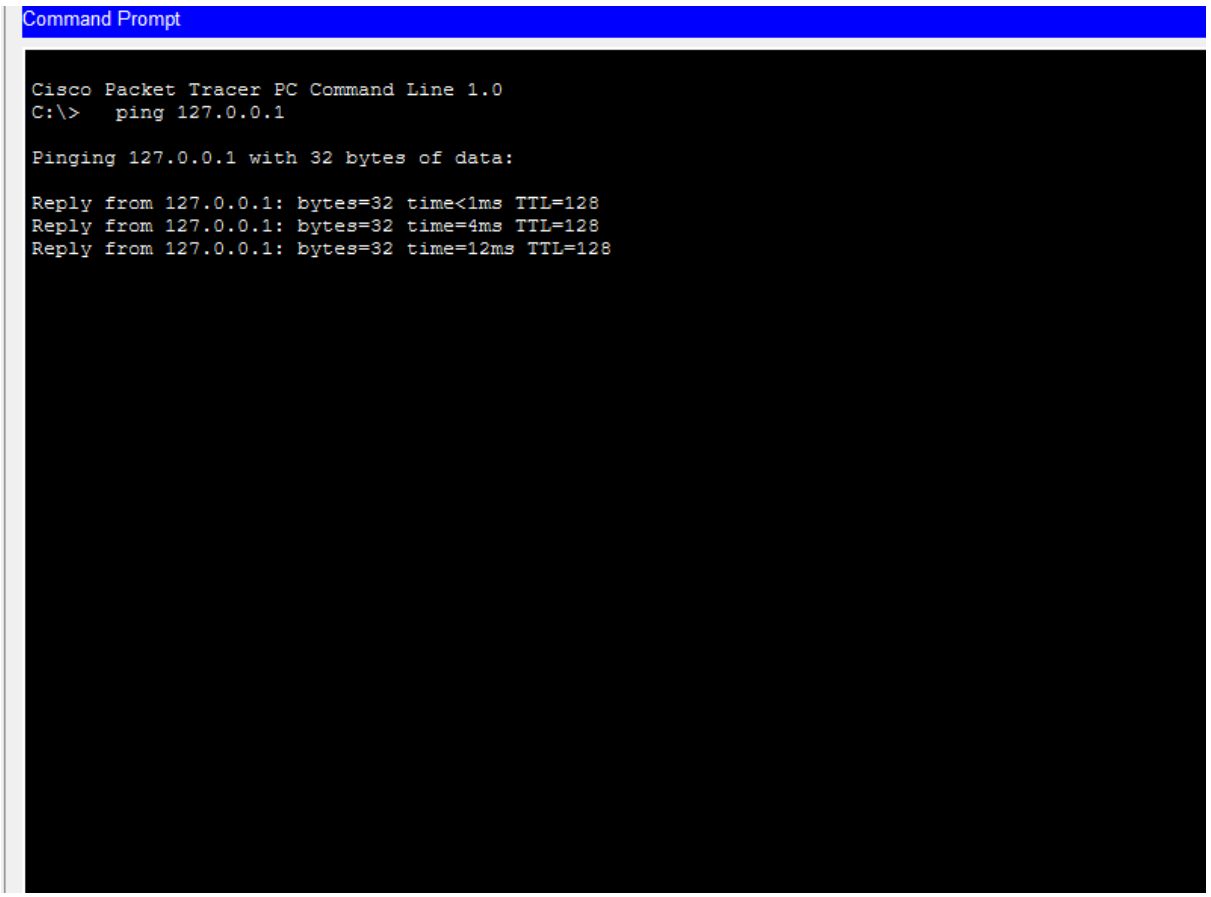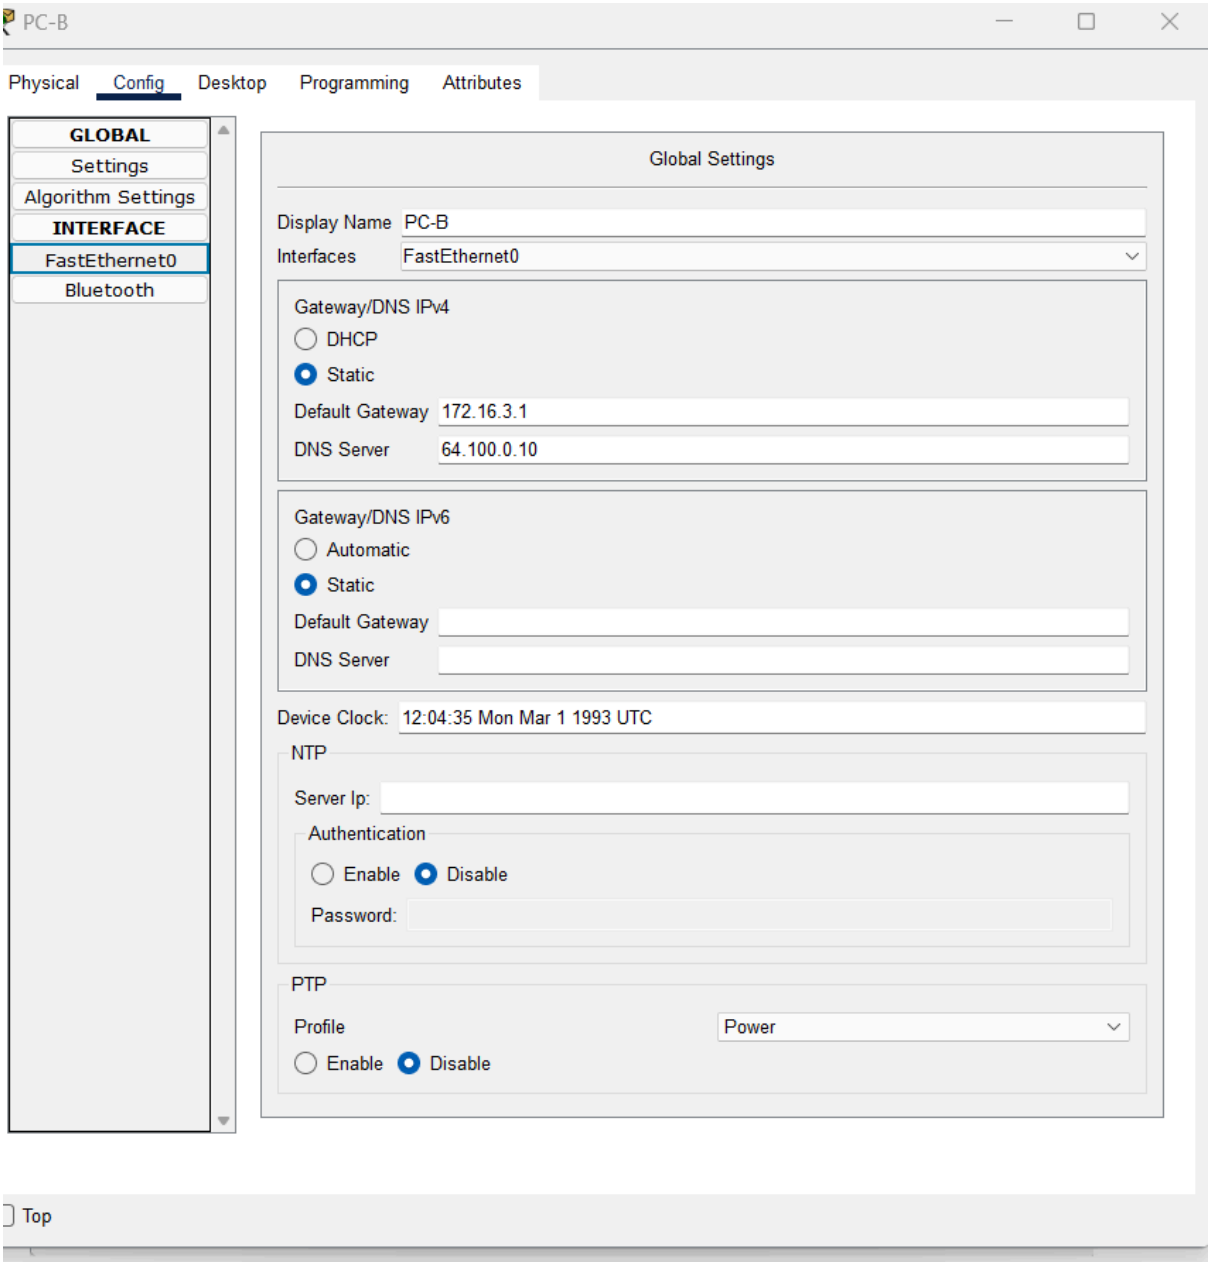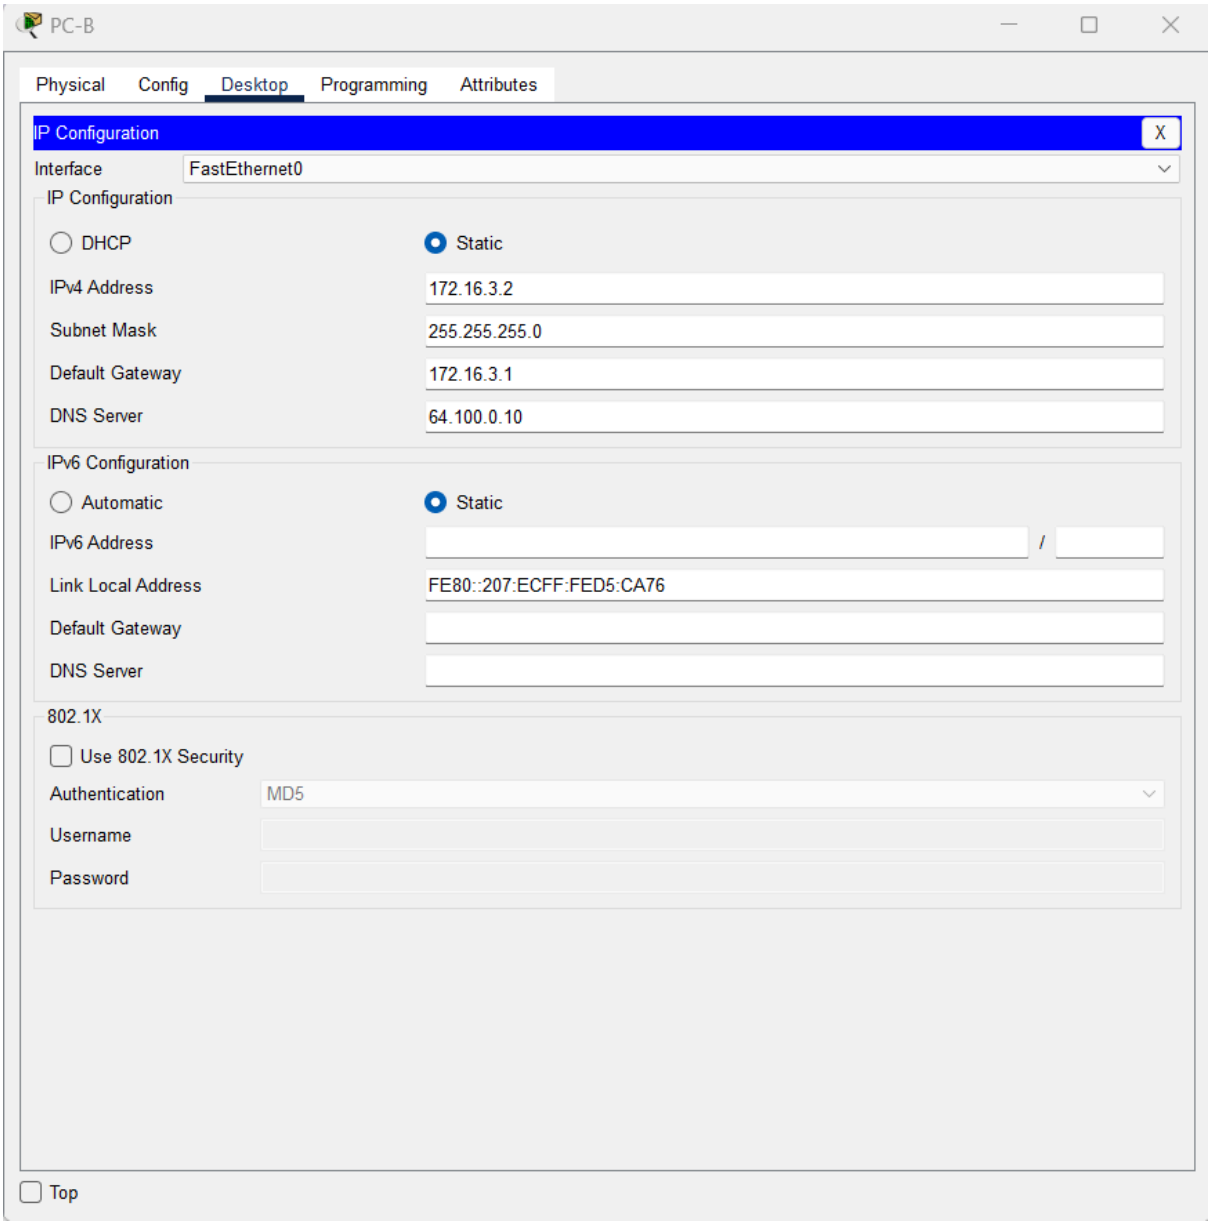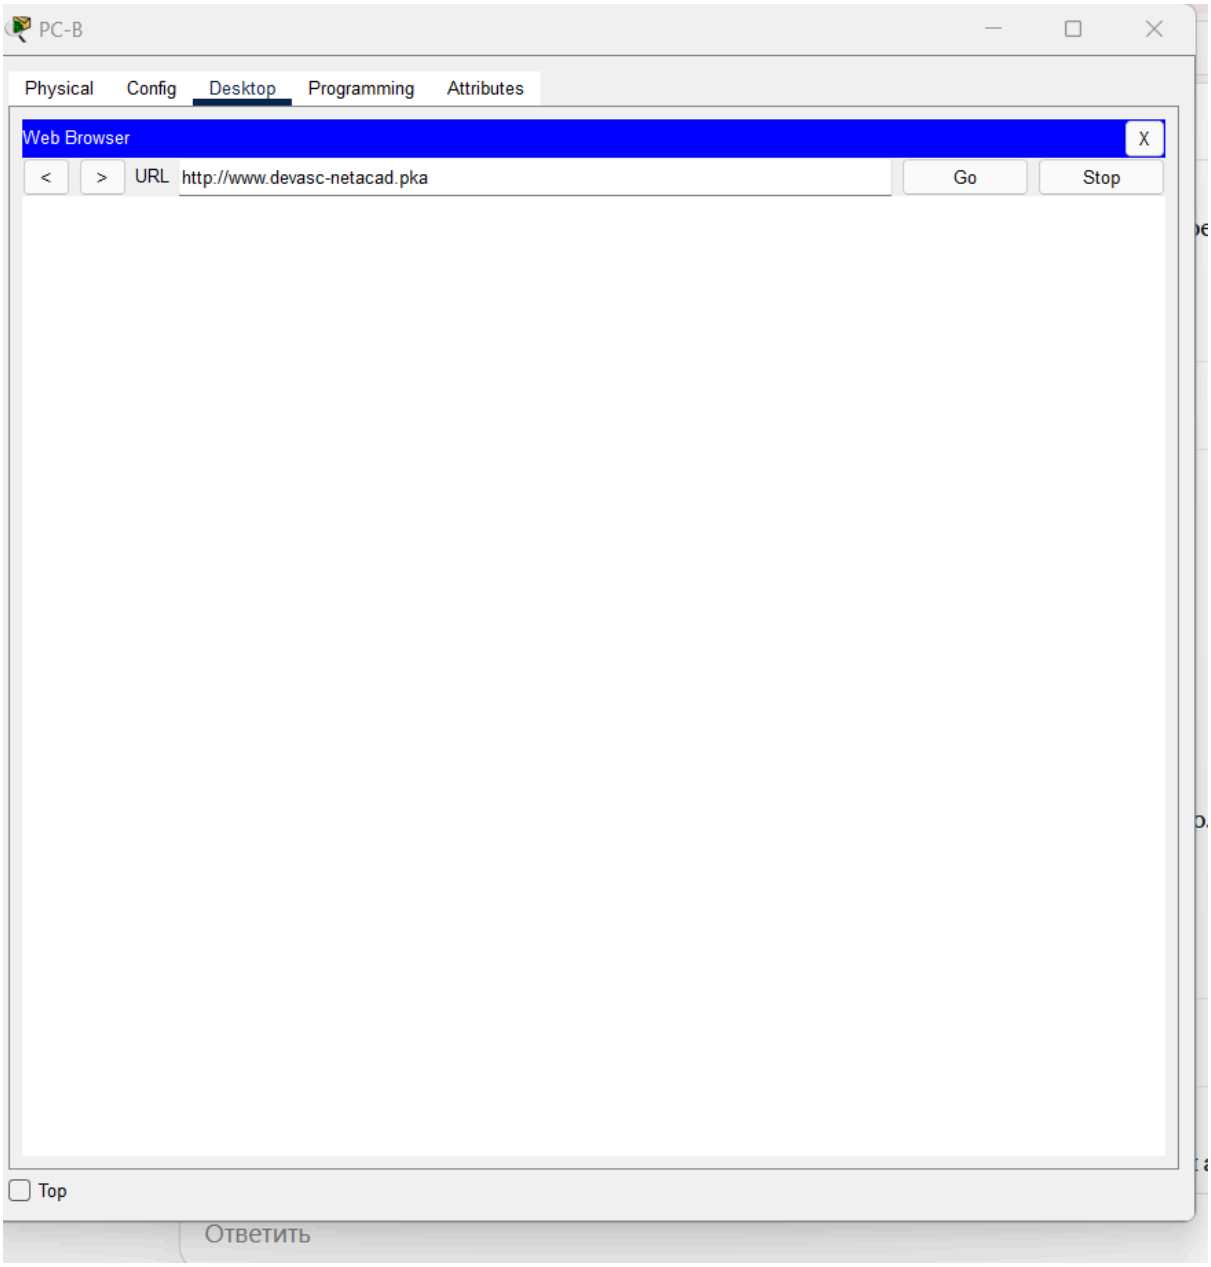



```
C:\>   ping 172.16.3.1

Pinging 172.16.3.1 with 32 bytes of data:

Request timed out.
Request timed out.
```

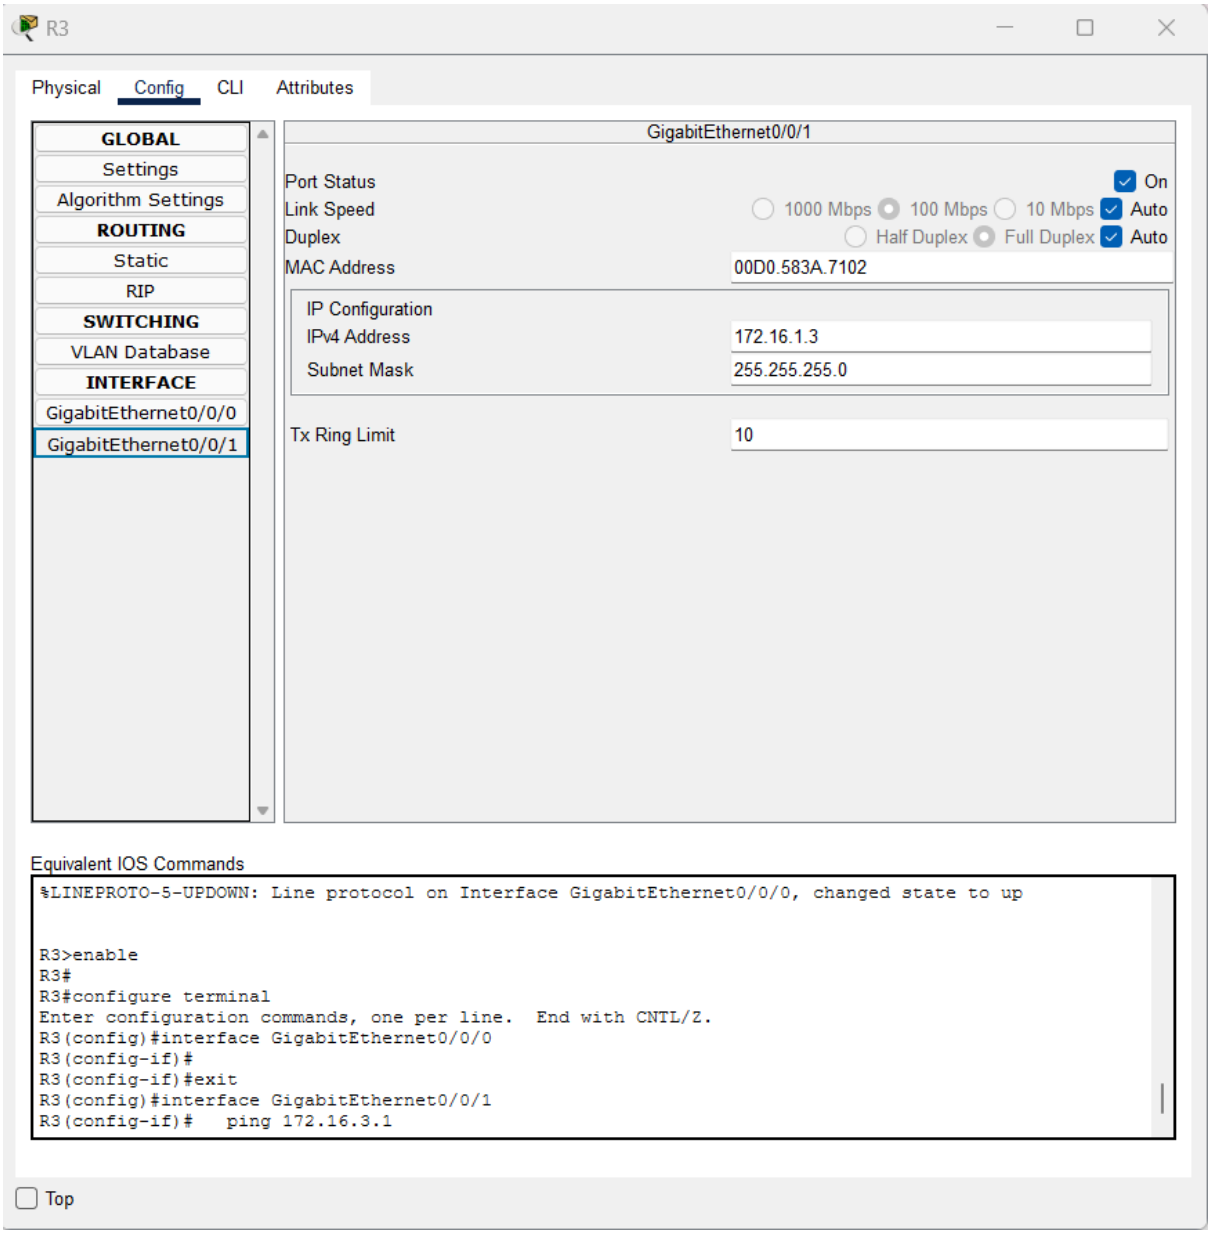
R3
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
SWITCHING
VLAN Database
INTERFACE
GigabitEthernet0/0/0
GigabitEthernet0/0/1
GigabitEthernet0/0/1
Port Status
On
Link Speed
1000 Mbps
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
00D0.583A.7102
IP Configuration
IPv4 Address
172.16.1.3
Subnet Mask
255.255.255.0
Tx Ring Limit
10
Equivalent IOS Commands
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/0, changed state to up
R3>enable
R3#
R3#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#interface GigabitEthernet0/0/0
R3(config-if)#
R3(config-if)#exit
R3(config)#interface GigabitEthernet0/0/1
R3(config-if)# ping 172.16.3.1
Top

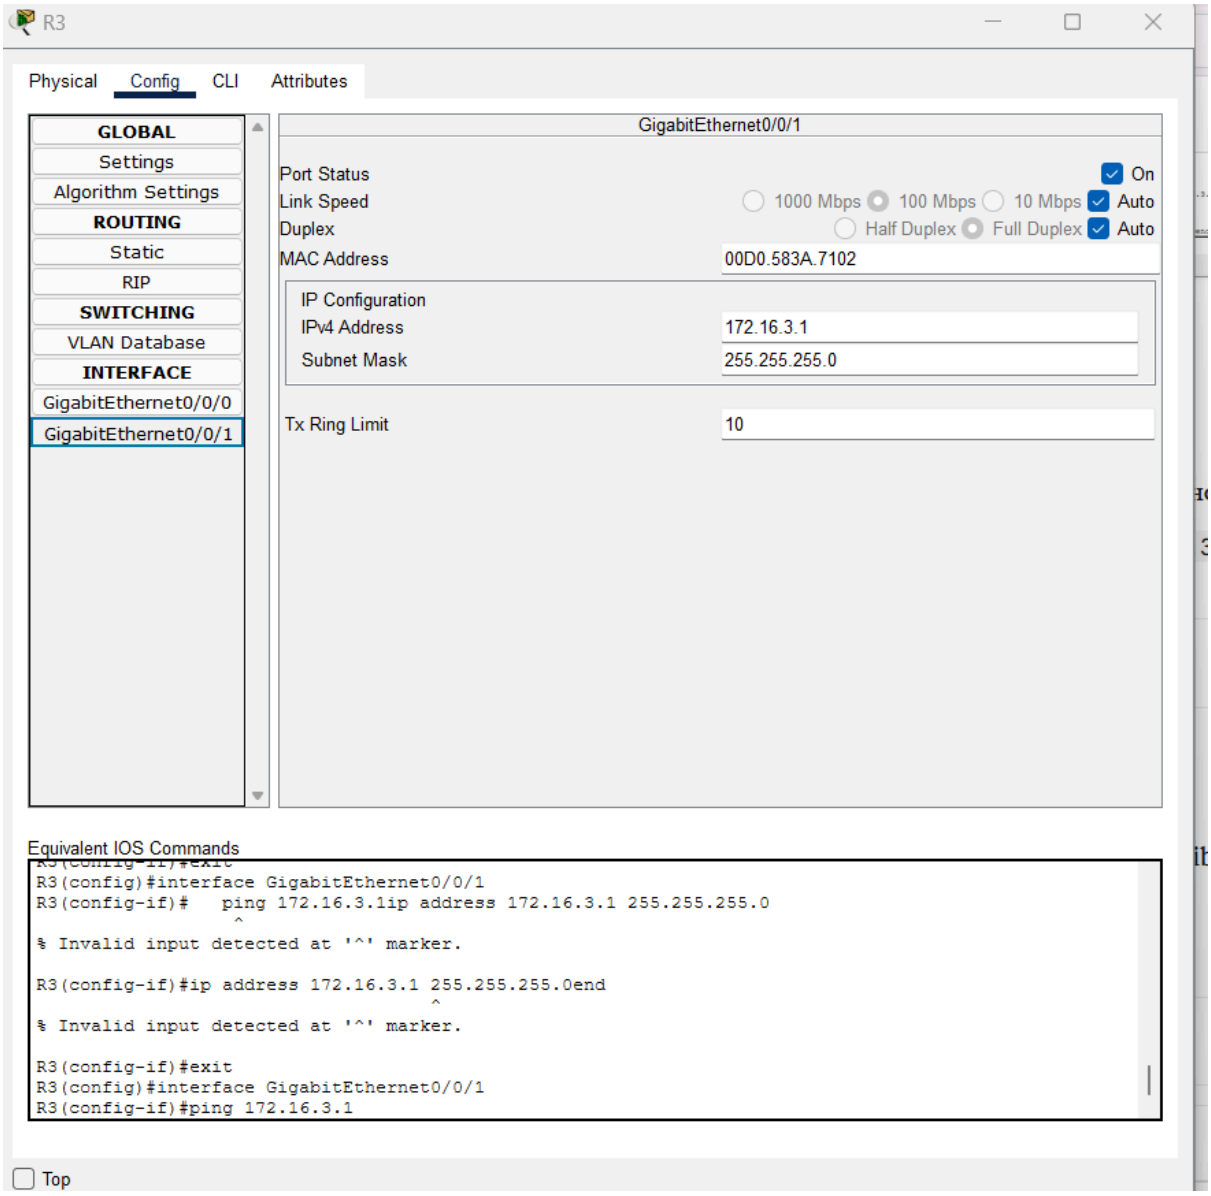



```
C:\>ping 172.16.3.1


Pinging 172.16.3.1 with 32 bytes of data:

Reply from 172.16.3.1: bytes=32 time<1ms TTL=255
Reply from 172.16.3.1: bytes=32 time<1ms TTL=255
Reply from 172.16.3.1: bytes=32 time<1ms TTL=255
Reply from 172.16.3.1: bytes=32 time<1ms TTL=255

Ping statistics for 172.16.3.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

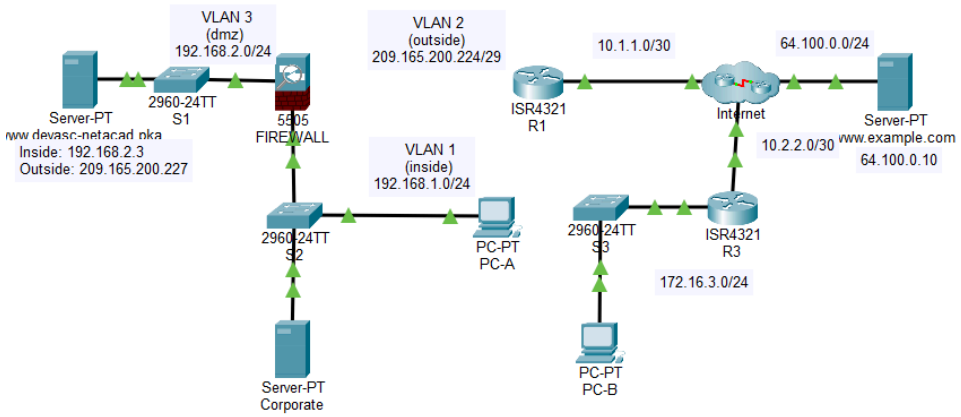
VLAN 3
(dmz)
192.168.2.0/24
VLAN 2
(outside)
209.165.200.224/29
10.1.1.0/30
64.100.0.0/24
Server-PT
2960-24TT
S1
5505
FIREWALL
ISR4321
R1
Internet
Server-PT
www.example.com
64.100.0.10
Inside: 192.168.2.3
Outside: 209.165.200.227
VLAN 1
(inside)
192.168.1.0/24
10.2.2.0/30
2960-24TT
S2
PC-PT
PC-A
2960-24TT
S3
ISR4321
R3
172.16.3.0/24
Server-PT
Corporate
PC-PT
PC-B

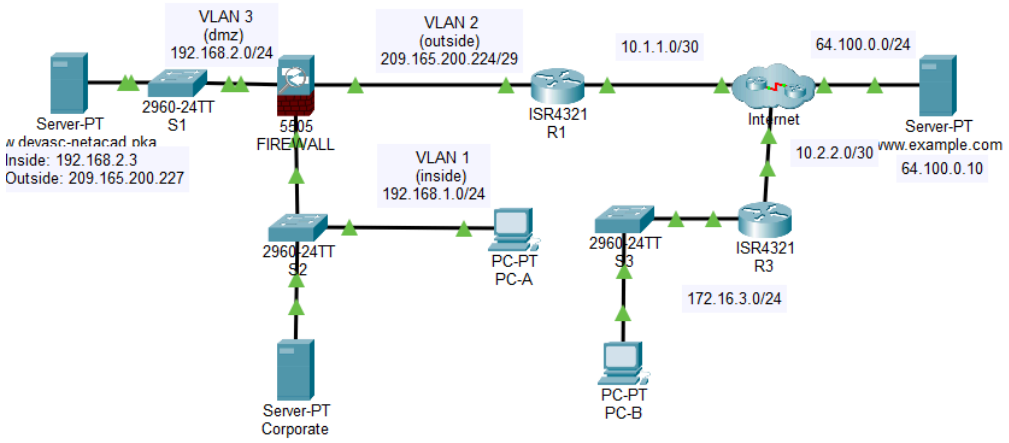
VLAN 3
(dmz)
192.168.2.0/24
VLAN 2
(outside)
209.165.200.224/29
10.1.1.0/30
64.100.0.0/24
Server-PT
2960-24TT
S1
5505
FIREWALL
ISR4321
R1
Internet
Server-PT
www.example.com
64.100.0.10
Inside: 192.168.2.3
Outside: 209.165.200.227
VLAN 1
(inside)
192.168.1.0/24
10.2.2.0/30
2960-24TT
S2
PC-PT
PC-A
2960-24TT
S3
ISR4321
R3
172.16.3.0/24
Server-PT
Corporate
PC-PT
PC-B

```
Pinging 209.165.200.225 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.

Ping statistics for 209.165.200.225:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

Control-C
^C
C:\>    ping 209.165.200.225

Pinging 209.165.200.225 with 32 bytes of data:

Reply from 209.165.200.225: bytes=32 time<1ms TTL=253
Reply from 209.165.200.225: bytes=32 time<1ms TTL=253
Reply from 209.165.200.225: bytes=32 time<1ms TTL=253
Reply from 209.165.200.225: bytes=32 time<1ms TTL=253

Ping statistics for 209.165.200.225:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```


```
C:\>    ping 209.165.200.227


Pinging 209.165.200.227 with 32 bytes of data:


Reply from 209.165.200.227: bytes=32 time=1ms TTL=124
Reply from 209.165.200.227: bytes=32 time=1ms TTL=124
Reply from 209.165.200.227: bytes=32 time=1ms TTL=124
Reply from 209.165.200.227: bytes=32 time=1ms TTL=124


Ping statistics for 209.165.200.227:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>
```

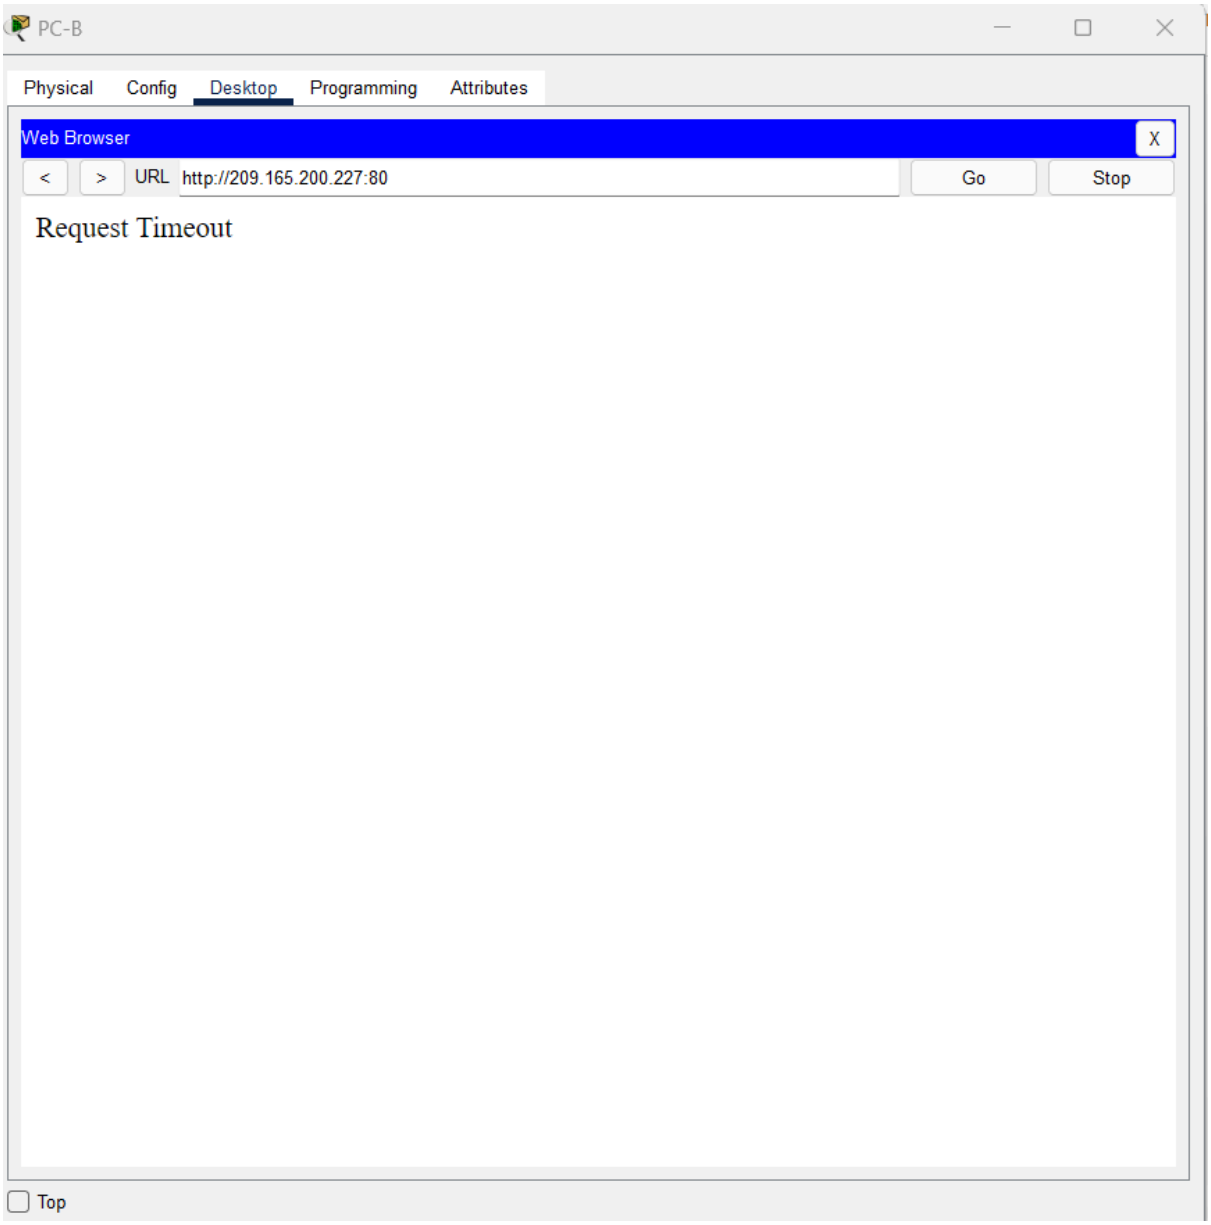
PC-B
Physical
Config
Desktop
Programming
Attributes
Web Browser
X
<
>
URL
http://209.165.200.227:80
Go
Stop
Request Timeout
Top

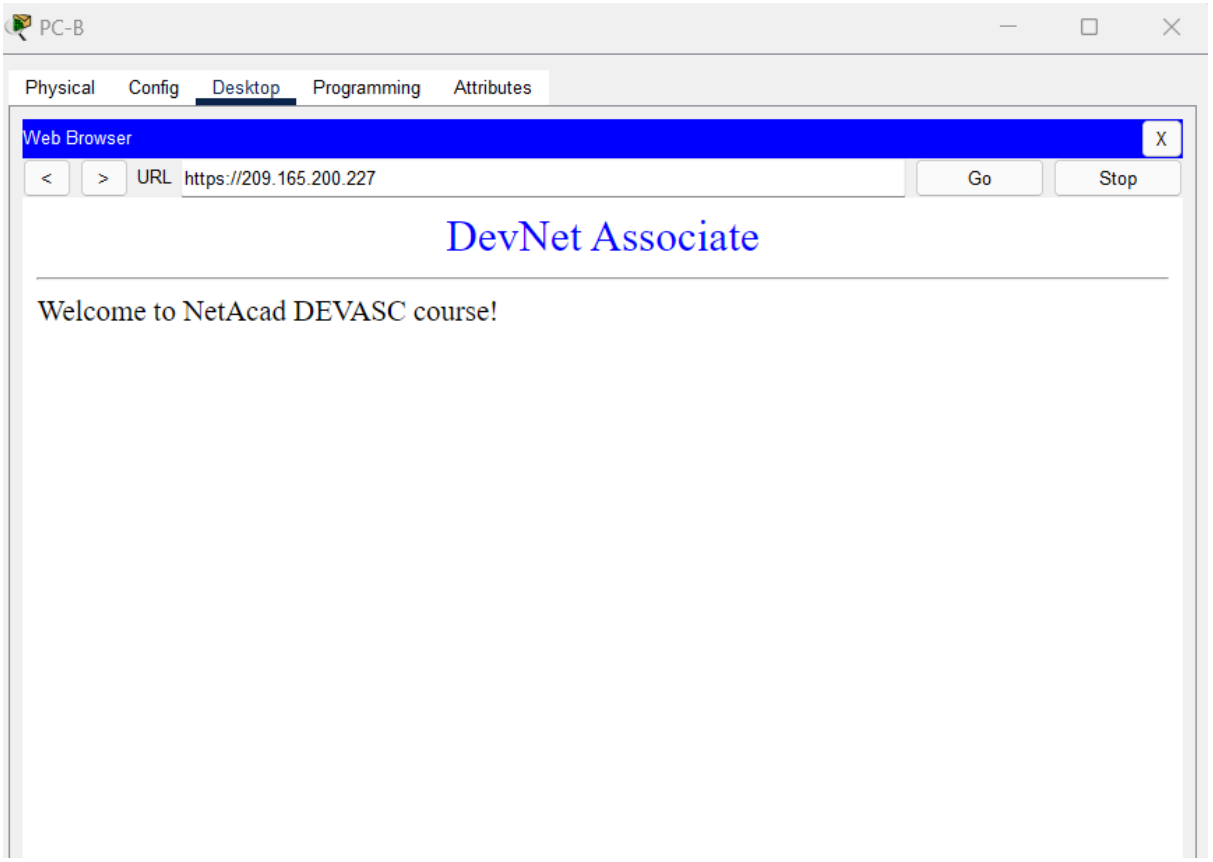
PC-B
Physical
Config
Desktop
Programming
Attributes
Web Browser
X
<
>
URL
https://209.165.200.227
Go
Stop
DevNet Associate
Welcome to NetAcad DEVASC course!

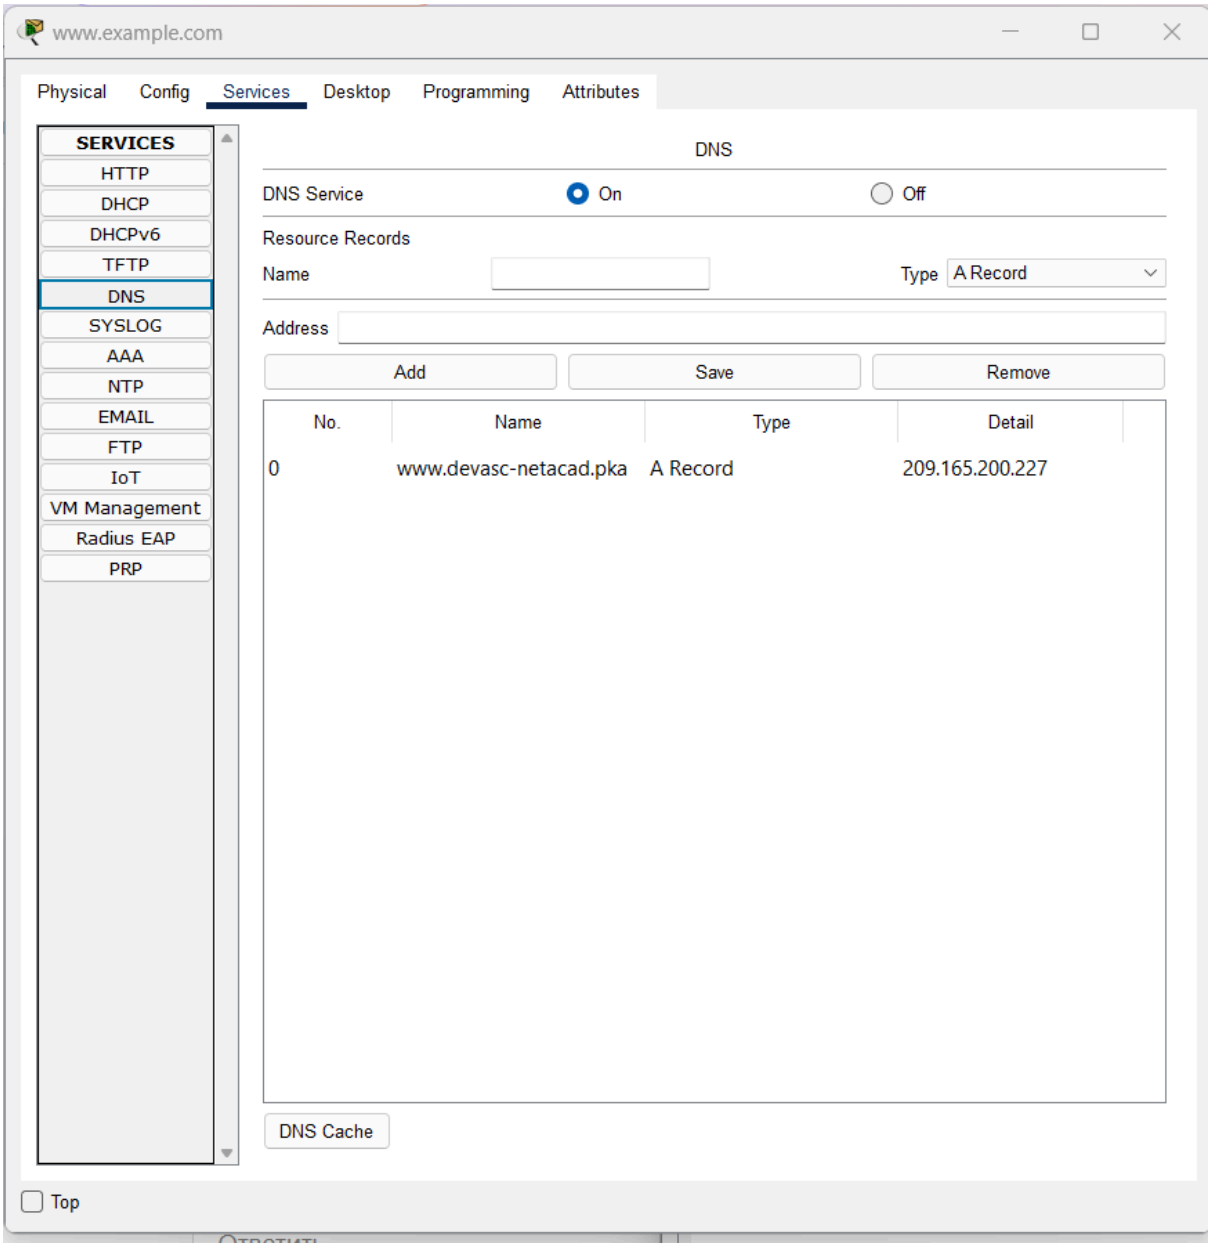
www.example.com
Physical
Config
Services
Desktop
Programming
Attributes
SERVICES
HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
PRP
DNS
DNS Service
On
Off
Resource Records
Name
Type
A Record
Address
Add
Save
Remove
No.
Name
Type
Detail
0
www.devasc-netacad.pka
A Record
209.165.200.227
DNS Cache
Top

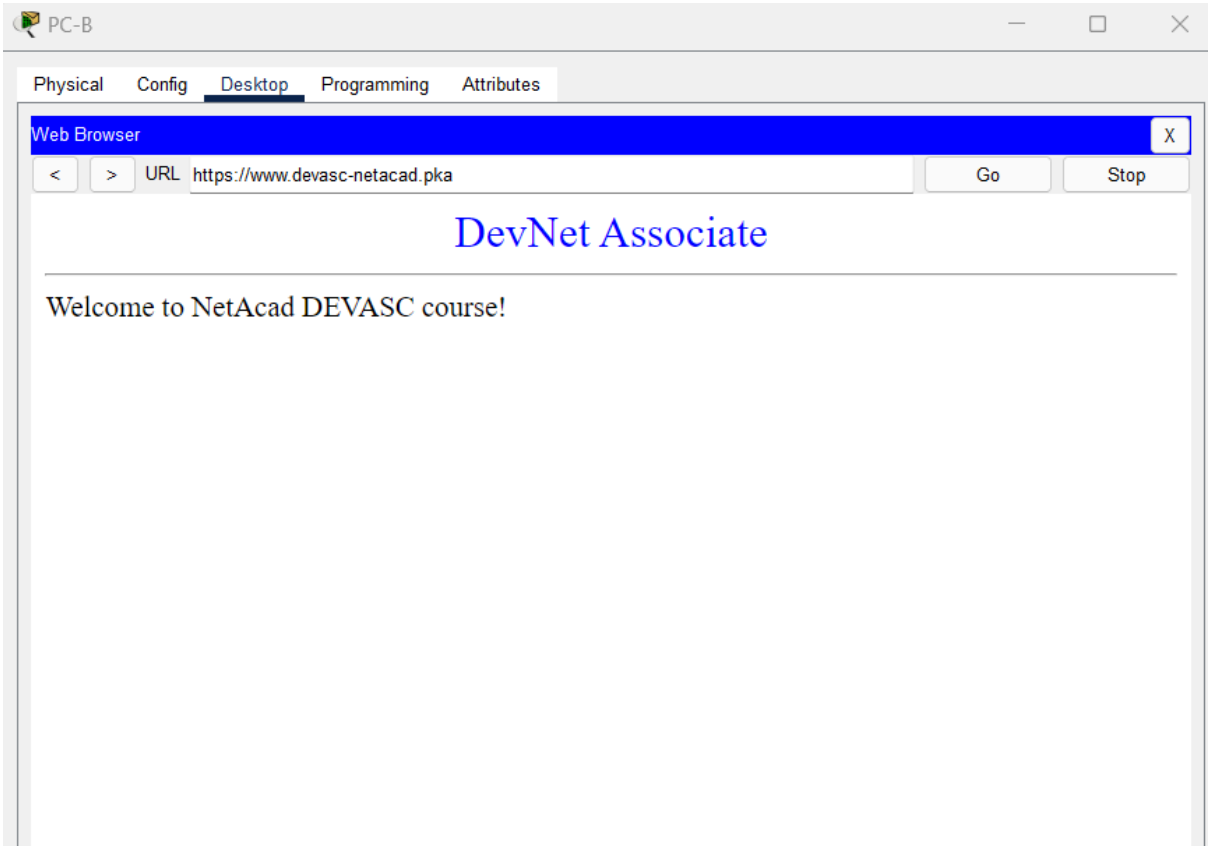

PT Activity: 00:16:25


Packet Tracer - Troubleshoot Common Network Problems

Addressing Table

Device	Interface	IPv4 Address	Subnet
R1	G0/0/0	209.165.200.225	255.255.25
	G0/0/1	10.1.1.2	255.255.25
R3	G0/0/0	10.2.2.2	255.255.25
	G0/0/1	172.16.3.1	255.255.25
FIREWALL	VLAN1	192.168.1.1	255.255.25
	VLAN2	209.165.200.226	255.255.25

Time Elapsed: 00:16:25 Completion: 100%

Top Dock Check Results Back 1/1 Next

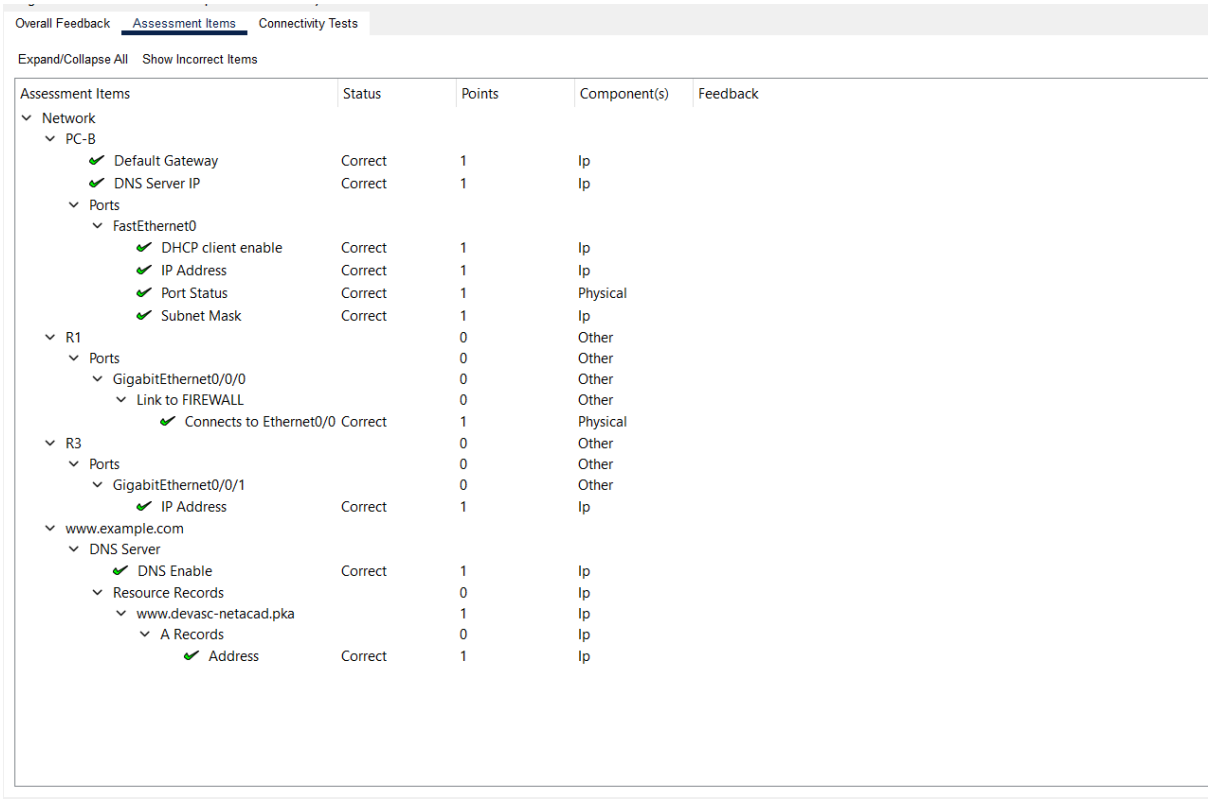
Overall Feedback
Assessment Items
Connectivity Tests
Expand/Collapse All
Show Incorrect Items
Assessment Items
Status
Points
Component(s)
Feedback
Network
PC-B
Default Gateway
Correct
1
Ip
DNS Server IP
Correct
1
Ip
Ports
FastEthernet0
DHCP client enable
Correct
1
Ip
IP Address
Correct
1
Ip
Port Status
Correct
1
Physical
Subnet Mask
Correct
1
Ip
R1
0
Other
Ports
0
Other
GigabitEthernet0/0/0
0
Other
Link to FIREWALL
0
Other
Connects to Ethernet0/0
Correct
1
Physical
R3
0
Other
Ports
0
Other
GigabitEthernet0/0/1
0
Other
IP Address
Correct
1
Ip
www.example.com
DNS Server
DNS Enable
Correct
1
Ip
Resource Records
0
Ip
www.devasc-netacad.pka
1
Ip
A Records
0
Ip
Address
Correct
1
Ip