



# Industrial Data Logger

## IIoT 4.0



## Contents


1. Introduction .....	2
2. Features .....	3
3. Benefits .....	4
4. Applications.....	4
5. Block Diagram .....	5
6. Pin-out.....	6
7. Programming IDE .....	8
8. Product Specification .....	8
8.1. Digital Input.....	8
8.2. Digital Output.....	10
8.3. Analog Input.....	11
8.4. SD Card.....	13
8.5. RTC .....	13
8.6. FRAM.....	14
8.7. PWDT (Physical Watch Dog Timer) .....	15
8.8. Flash .....	16
8.9. Ethernet .....	17
8.10. ESP32/XBEE/LoRA/RS485.....	18
8.11. GSM.....	20
8.12. RS485 Modbus .....	22
8.13. RS232/FT232/Program.....	24
8.14. DAC.....	25
8.15. Status LED Display .....	27
8.16. RDL Bus.....	28
8.17. STM32 .....	29
9. Power Supply .....	30
10. Order Information Table .....	31
11. References and Datasheets .....	32



## 1. Introduction

RDL data logger is a comprehensive real time industrial automation tool. The product is designed to seamlessly integrate with the IoT and Analytical processing systems. Supporting multiple I/O options, interfaces data logger is a perfect fit to build custom automation solutions.

The state of art design incorporates carefully selected devices with minimum power requirements, stable operation in industrial environment and up to date feature set. The product architecture incorporates functionally partitioned across multiple controllers to ensure minimum down-time and interruptions on the production lines.

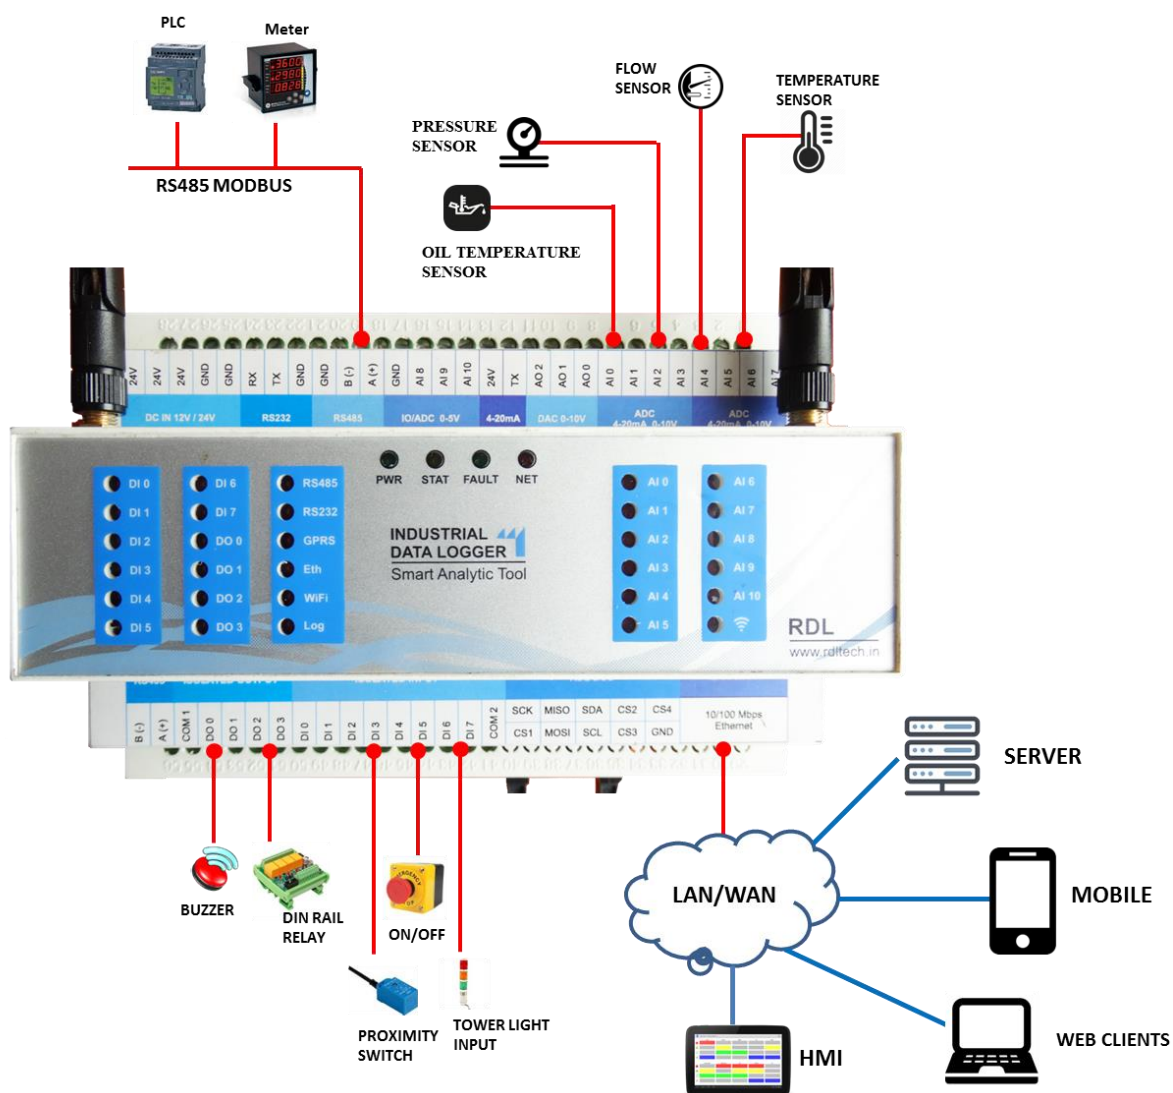



## 2. Features

- 8x ADC 0 - 10V / 4 - 20mA
- 3x DAC 0-10V
- 1x 4-20ma Transmitter
- 3x ADC/IO 0-5v
- 8x DI 24v & 3x DO
- 2x RS485 Modbus\*
- 10/100 MBPS Ethernet
- 1x RS232
- 1x Quad band GSM /GPRS Modem\*
- 1x External PWDT
- 1x SD card , RTC ,FLASH & FRAM
- 1x XBee /ESP32/Lora/RS485\*
- 12/24V DC to DC Converter
- RDL Extension BUS with SPI /I2C /IO
- Mega2560 Controller
- Enable with STM32F030RCTx Co-controller for Advanced programming





### 3. Benefits

Reduce Supplier dependency and cost by complete ownership of the solution. Automation requirements keep increasing and changing with time, engaging external supplier is cost and loss of productive time. Open Platform Model allows to build custom solutions with minimal R&D cost. Our platform and tools will enable a base solution to be built and deployed with 1 person month of effort with basic programming skills.


- Simplified logging network as RDL Data Logger supports multiple features
- Paper-less Production environment
- Production count, rejections
- Machine availability and Downtimes
- Preventive maintenance
- Performance Forecasting
- Enable Management by IT

### 4. Applications

- Production and process monitoring.
- Utilities monitoring.
- Condition monitoring.
- Environment monitoring.
- Industrial Smart grid
- Leakage detection.
- Cold storage monitoring.
- District metering.
- Water treatment.
- Generator monitoring.
- Green House.
- Warning message in case of calamities.
- Standard SCADA Applications



## 5. Block Diagram

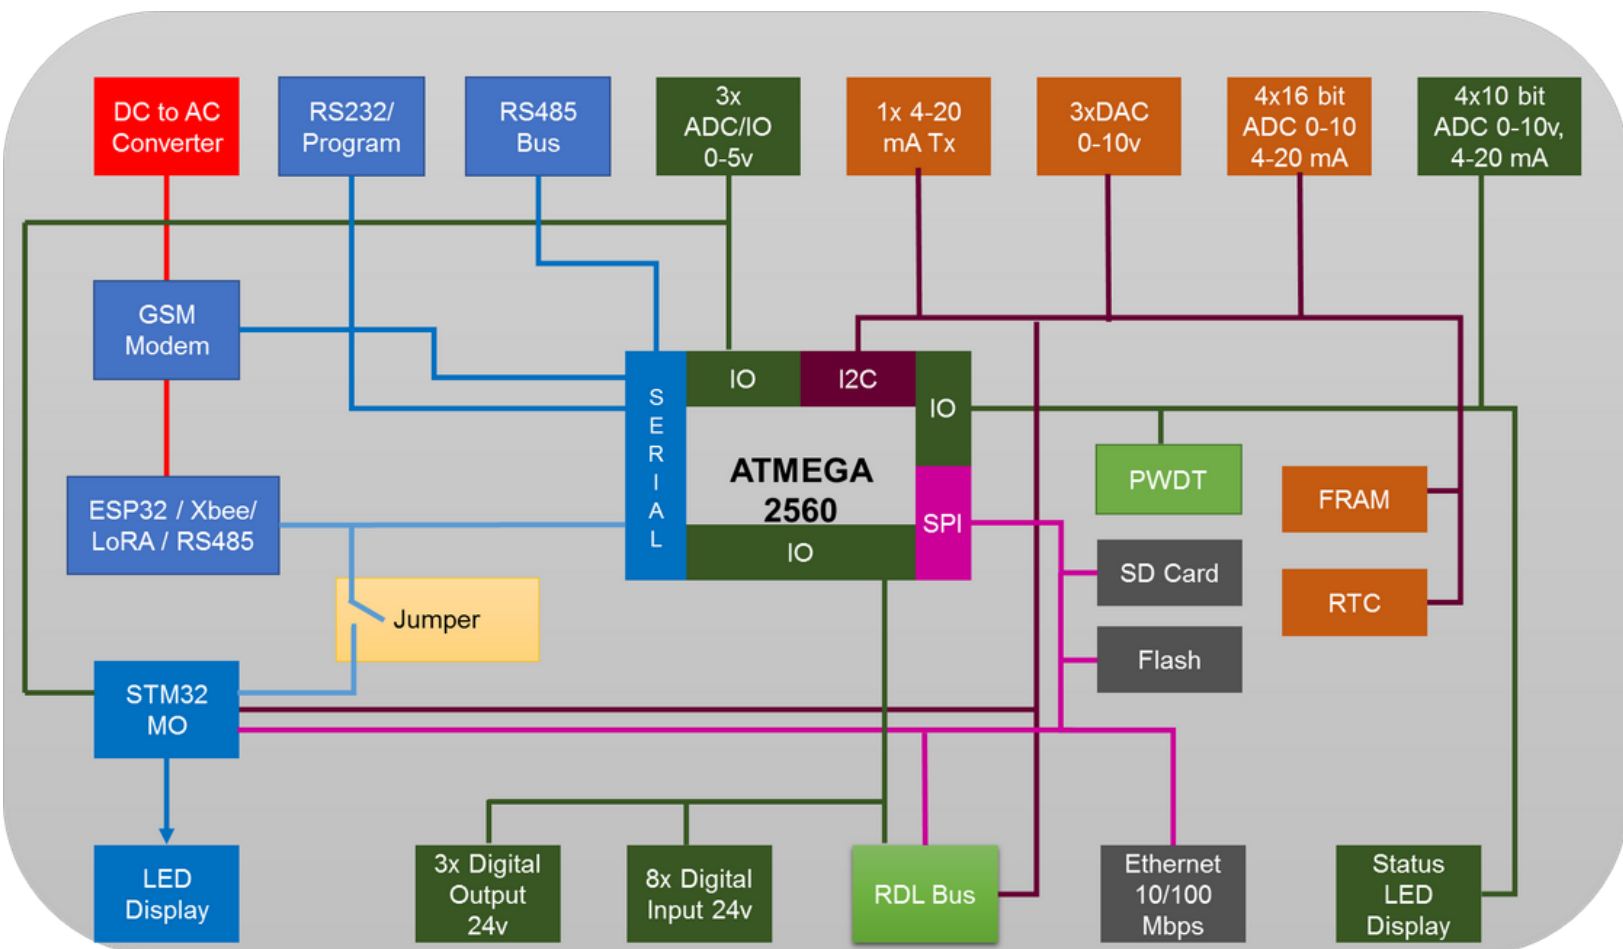



## 6. Pin-out

FT232/MAX23	D0	A14	IN
FT232/MAX23	D1	A13	IN
RDL BUS CS	D2	A12	IN
GSM PWR Key	D3	A11	IN
WATCH DOG	D4	A15	ADC/4-20mA IN
RS485 Select	D5	A10	ADC/4-20mA IN
IO	D6	A9	ADC/4-20mA IN
IO	D7	A8	ADC/4-20mA IN
IO	D8	A2	ADC IN3
ETHERNET RST	D9	A1	ADC IN3
ETHERNET CS	D10	A0	ADC IN3
LED	D12	SS	SD CARD CS
LED	D13	SCK	FLASH/SD/ETHERNET/RDL BUS
RS485	TX3	MOSI	FLASH/SD/ETHERNET/RDL BUS
RS485	RX3	MISO	FLASH/SD/ETHERNET/RDL BUS
GSM	TX2	D49	DOUT
GSM	RX2	D48	DOUT
XBEE/RS485	TX1	D47	DOUT
XBEE/RS485	RX1	D46	DOUT
RTC/FRAM/DAC/RDL BUS	SCL	D39	FLASH CS
RTC/FRAM/DAC/RDL BUS	SDA	D45	DIN
1= 4-20mA 0= ADC	D22	D44	DIN
1= 4-20mA 0= ADC	D23	D43	DIN
1= 4-20mA 0= ADC	D24	D42	DIN
1= 4-20mA 0= ADC	D25	D41	DIN
1= 4-20mA 0= ADC	D26	D40	DIN
1= 4-20mA 0= ADC	D27	D38	DIN
1= 4-20mA 0= ADC	D28	D37	DIN
1= 4-20mA 0= ADC	D29	D36	XBEE RESET
IO	D30	D35	IO
IO	D31	D34	IO
IO	D32	D33	IO





<b>Pins</b>	<b>Functionality</b>
D0, D1	Serial Pins. To which either FT232 can be connected or a MAX232 can be connected.
D2	RDL Bus chip select Pin
D3	RDL chip select or slave select pin
D4	GSM power key (Software Switch). High-to-Low on this pin powers ON the GSM.
D5	RS485 select (control) pin for serial communication.
D6 – D8, D30 – D35	Left open to the user and can be configured either as an input or output.
D9	Reset pin for Ethernet
D10	Chip select or slave select pin for Ethernet
D12, D13	LED pins which could be programmed for status indication as required.
TX3, RX3	RS485 serial communication
TX2, RX2	GSM serial communication
TX1, RX1	Can either be connected to RS485 or XBEE for serial communication
SCL, SDA	Can be connected to I2C based RTC, FRAM, DAC and RDL bus
D22 – D29	Control pins to select ADC as a 0-10V Voltage reading channel or 4-20mA Current reading channel.
D36	XBEE reset pin
D37, D38	Digital input pins
D39	Chip select or slave select pin for Flash
D40 – D45	Digital input pins
D46 – D49	Digital Output pins
MISO, MOSI, SCK	SPI pins to where number of devices could be connected
SS	Chip select or slave select pin for SD Card
A0 – A2	Analog Input Pins left open to the user
A8, A9, A10, A15	Analog Input Pins which could be configured (using pins d22-d29) to read either voltage or current.
A11 – A14	Analog Input Pins left open to the user





## 7. Programming IDE

The hardware supports various Open Source Programming IDE including Arduino IDE, Atmel Studio and Arduino Compatible Compiler for LabView. For more information on this follow “**Open Source Programming IDE**” section of the following link.

<https://rdltech.in/data-logger-iiot-4-0>


## 8. Product Specification

### 8.1. Digital Input


#### Specification

- Channels: 8
- Input Voltage: 0-24V
  - Logic High: >11V
  - Logic Low: <3V
- Isolation : 3750 VRMS
- Supports Inverted DI Status
- Supported Connection: Dry and Wet both
- Maximum Frequency : 200Hz

#### Functional Diagram

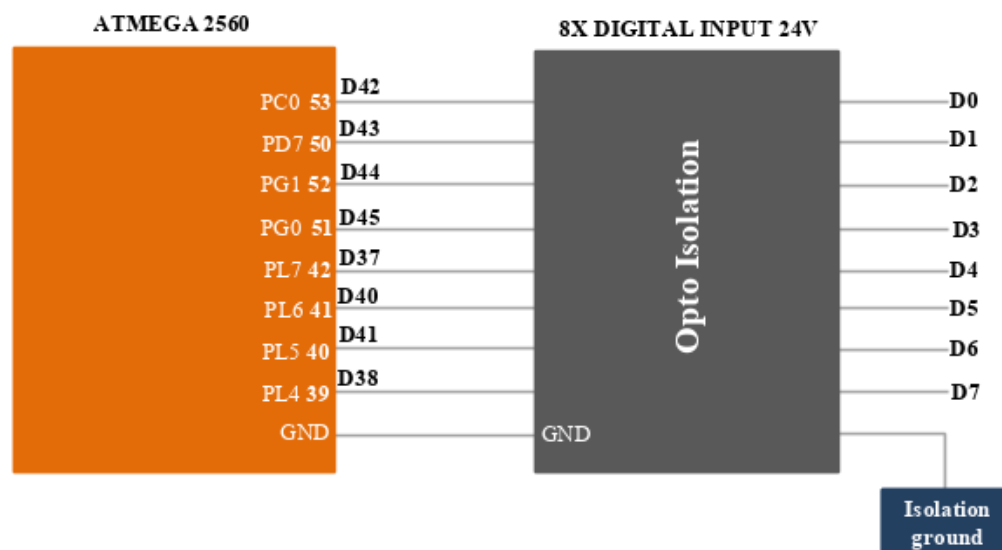


## Application Wiring

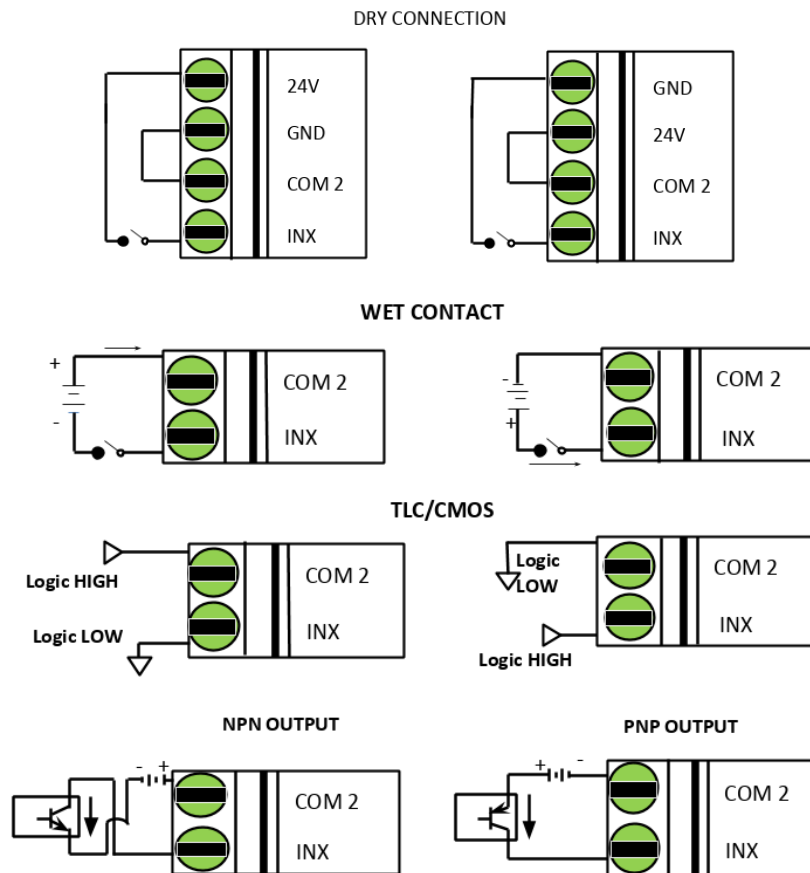

## Use Case

### 1. Measuring Frequency

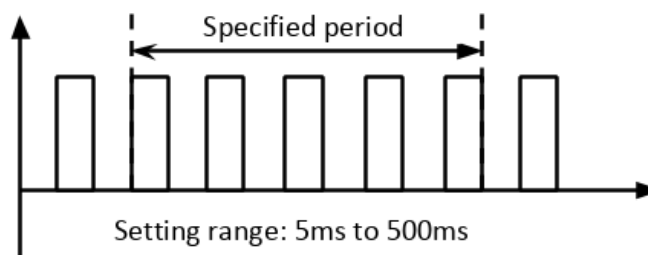

## Example Code

You may look into the following link for example on reading a digital pin.


<https://www.arduino.cc/reference/en/language/functions/digital-io/digitalread/>

## 8.2. Digital Output


### Specification

- Channels: 3
- Open Collector
- Isolation : 3750 VRMS
- Absolute maximum voltage - 35V, Current - 100mA
- Cut-Off Frequency : 10KHz

### Functional Diagram

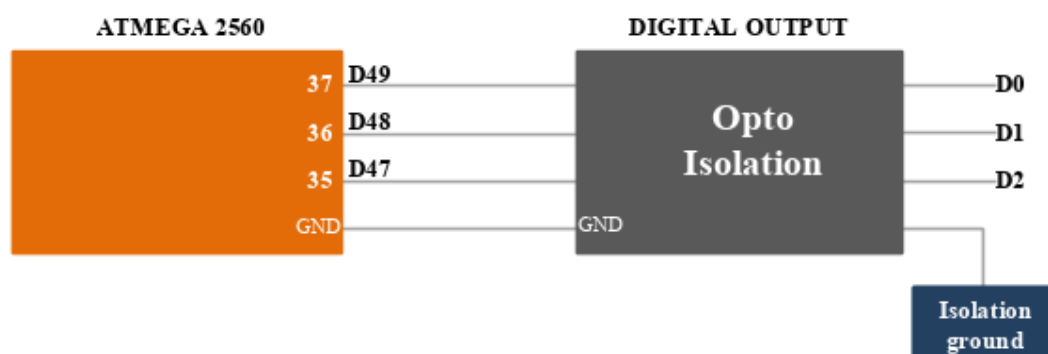

### Application Wiring

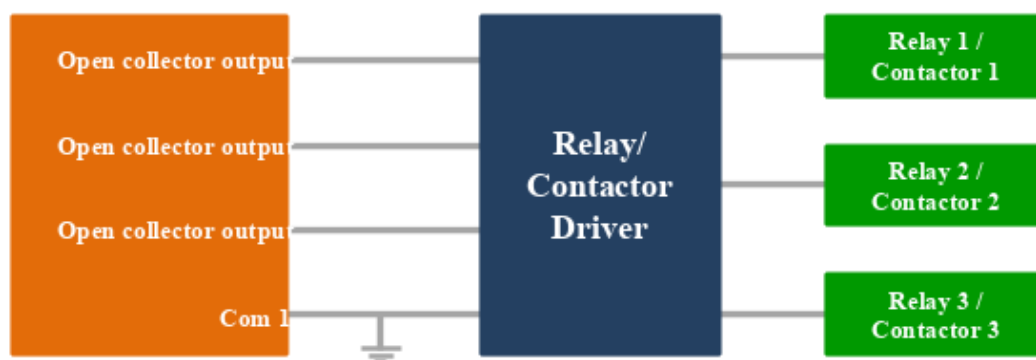

### Example Code


You may look into the following link for more details on writing to digital pin.

<https://www.arduino.cc/en/Reference.digitalWrite>


### 8.3. Analog Input

#### Specification

- Channels: 8+3
- **Group 1 :**
  - Channel : 4
  - Input : Voltage(0-10V) / Current(4-20mA)
  - Resolution : 16 bits
  - Sampling Rate – 860 sample/sec

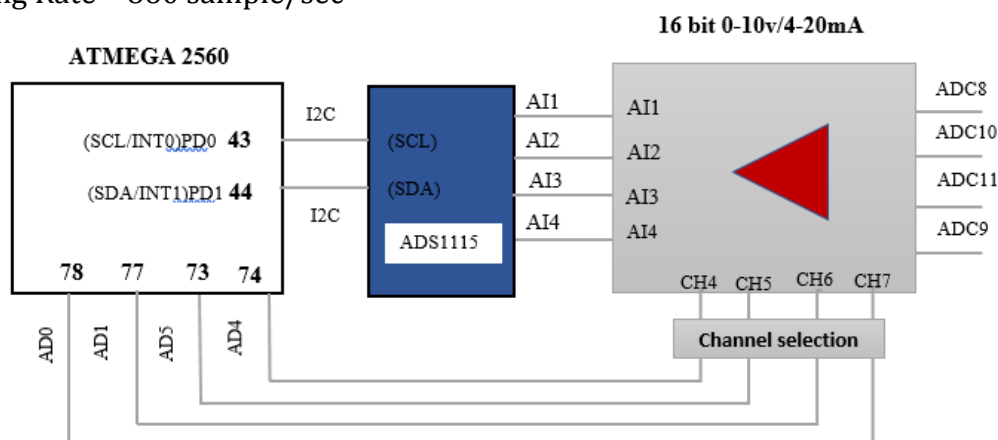


- **Group 2 :**
  - Channel : 4
  - Input : Voltage(0-10V) / Current(4-20mA)
  - Resolution : 10 bits
  - Sampling Rate – 9.6KHz (13 clocks)

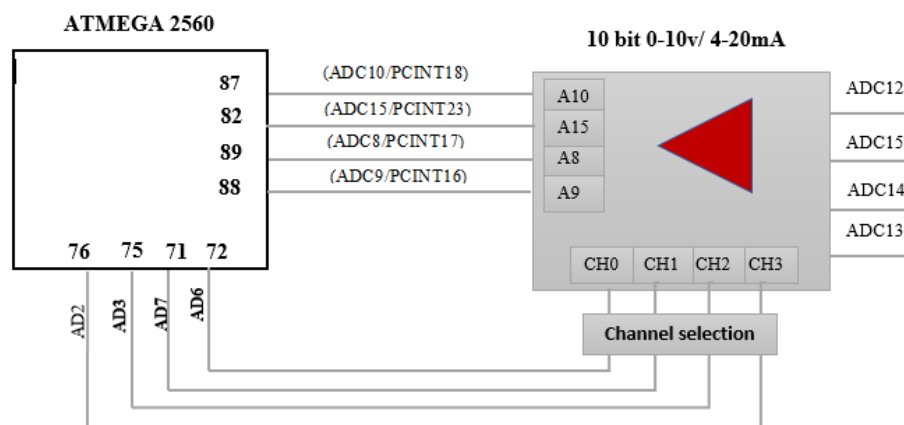

- **Group 3 :**




- Channel : 3
- Input : Voltage(0-5V)
- Resolution : 10 bits
- Sampling Rate – 9.6KHz (13 clocks)

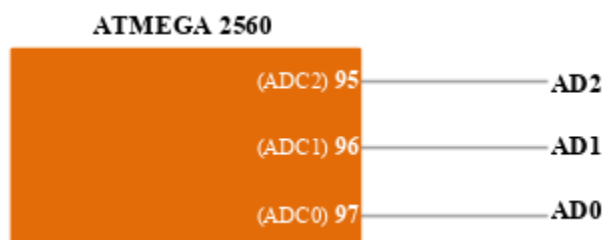

### Application Wiring

#### 1. Interfacing ADC with Sensor

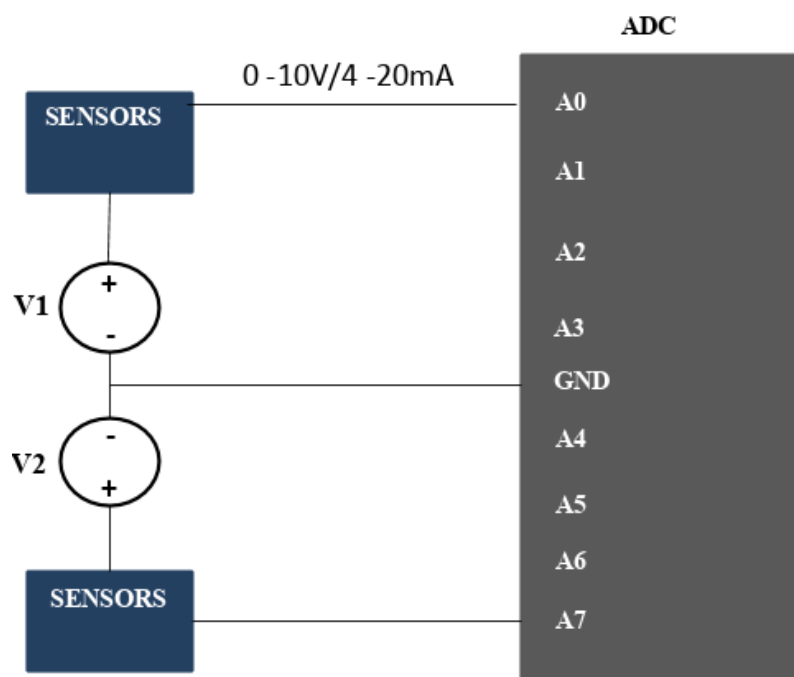

### Example Code

You may look into the following link for more details on reading analog pin.


<https://www.arduino.cc/en/Tutorial/ReadAnalogVoltage#toc5>

## 8.4. SD Card

### Specification

- SPI Serial Interface
- Supports Fat File system

### Functional Diagram

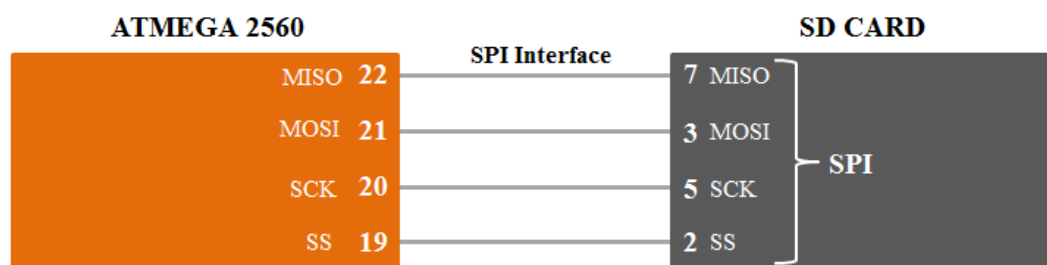

### Example Code

You may look into the following link for example on SD Card.


<https://www.arduino.cc/en/Reference/SD>

## 8.5. RTC

### Specification

- DS1307 with I2C Serial Interface
- Counts Seconds, Minutes, Hours, Date, Month, Day, and Year with Leap-Year Compensation.
- 56-Byte, Battery-Backed, NV RAM for Data Storage
- Consumes <500nA in Battery Backup Mode with Oscillator Running

### Functional Diagram

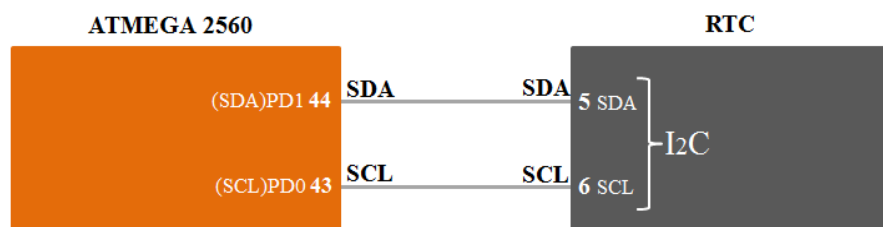

## Example Code

You may look into the following link for example code on RTC.

<https://www.arduino.cc/en/Reference/RTC>


## 8.6. FRAM

FRAM is specifically used for applications such as production counting, production rejection where variable subjected to continuous write cycle

### Specification

- MB85RC256V, I2C compatible with Bit configuration : 32,768 words × 8 bits
- Operating frequency : 1 MHz (Max)
- Read/write endurance : 1012 times / byte
- Number of write cycles: 100 Trillion times
- Operating power supply voltage : 2.7V to 5.5V, current 200  $\mu$ A
- Data Retention: 10 years (+85°C), 95 years (+55°C), over 200 years (+35°C).

### Functional Diagram

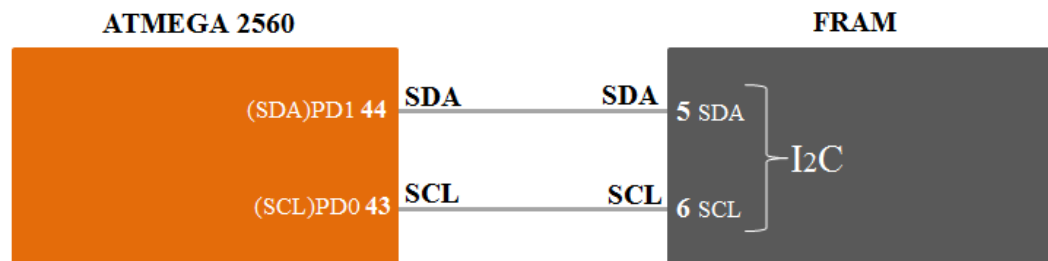

## Example Code

You may look into the following link for example on RTC

[https://github.com/adafruit/Adafruit\\_FRAM\\_I2C/blob/master/examples/MB85RC256V/MB85RC256V.ino](https://github.com/adafruit/Adafruit_FRAM_I2C/blob/master/examples/MB85RC256V/MB85RC256V.ino)



## 8.7. PWDT (Physical Watch Dog Timer)


External physical watchdog is connected along with inbuilt watchdog timer. There are many instances where we need to set watch dog time for more than 8 seconds (typically bulk file upload takes in minutes). As inbuilt WDT is limited to maximum of 8Sec, we have gone a step further to support watch dog time up to 3 minutes.

**Note: User must program PWDT to refresh before the timer (3 min) expires.**

### Specification

- PWDT supports up to 3minutes.
- PIC12F1840 used for PWDT
- Refresh time : 1 pulse in every 3 minutes
- Operating temperature range: -40 to 125 °C

### Functional Diagram

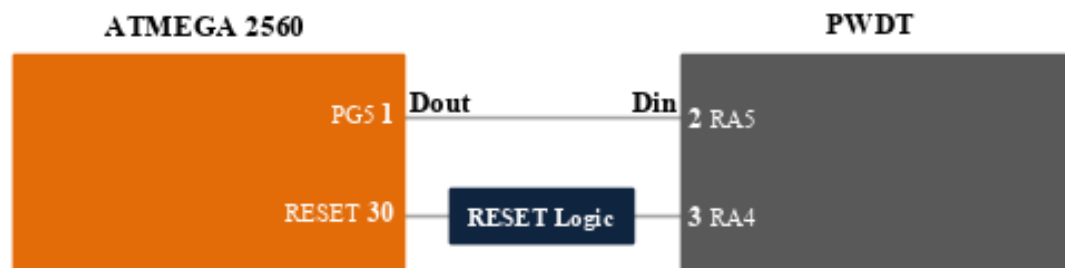

### Example Code

You may look into the following link for examples on watchdog timer.

<https://folk.uio.no/jeanra/Microelectronics/ArduinoWatchdog.html>


## 8.8. Flash

Flash is specifically used for embedded server.

### Specification

- SST25VF080B - SPI Compatible: Mode 0 and Mode 3
- Memory: 8MBit
- High Speed Clock Frequency – 50 MHz
- Single Voltage Read and Write Operations – 2.7-3.6V
- Endurance: 100,000 Cycles (typical) – >100 years Data Retention
- Low Power Consumption: – Active Read Current: 10 mA (typical)
- Flexible Erase Capability – Uniform 4KB, 32KB overlay blocks and 64KB overlay blocks
- Software Write Protection

### Functional Diagram

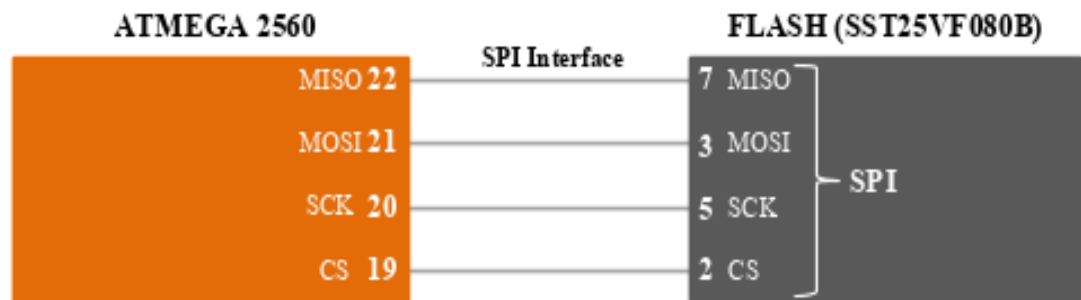

### Example Code

You may look into the following link for example on how to use flash.

<https://github.com/nullboundary/SST25VF>


## 8.9. Ethernet

Ethernet is specifically used for establishing secured physical network connectivity with local network infrastructure


### Specification

- W5500 IC with SPI serial interface
- IEEE 802.3 Gigabit Ethernet Compliant
- Communication protocols: TCP/IP, HTTP, FTP, MQTT, UDP,JSON....
- 3.3V operation with 5V I/O signal tolerance
- Low Power Consumption <200mW at 1.25Gbps.

### Functional Diagram

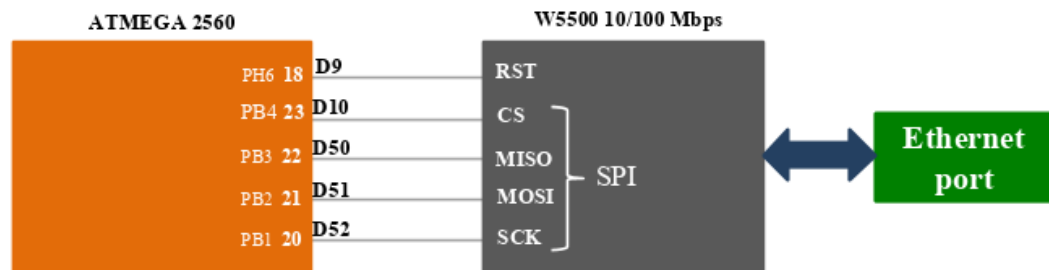

### Use Case

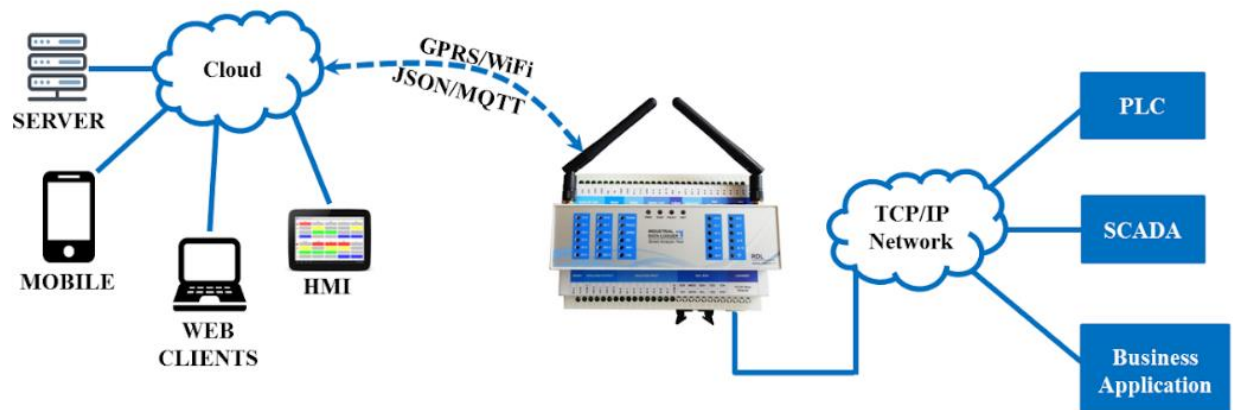

### Example Code

You may look into the following link for examples on Ethernet.


<https://www.arduino.cc/en/Reference/Ethernet>

## 8.10. ESP32/XBEE/LoRA/RS485

This is Add-On pluggable module. One among ESP32, XBEE, LoRA or RS485 is comes with the product. For more details on this, look into [Order Information Table](#).


This is specifically used for wireless connectivity with existing infrastructure.

### Functional Diagram

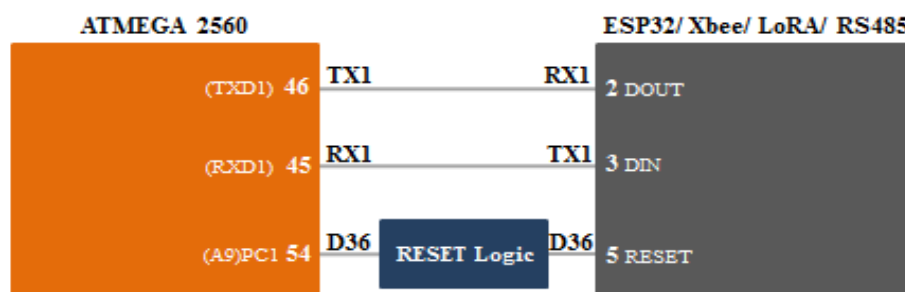


### Use Case


#### 1. Interfacing Industrial Data Logger with Bluetooth

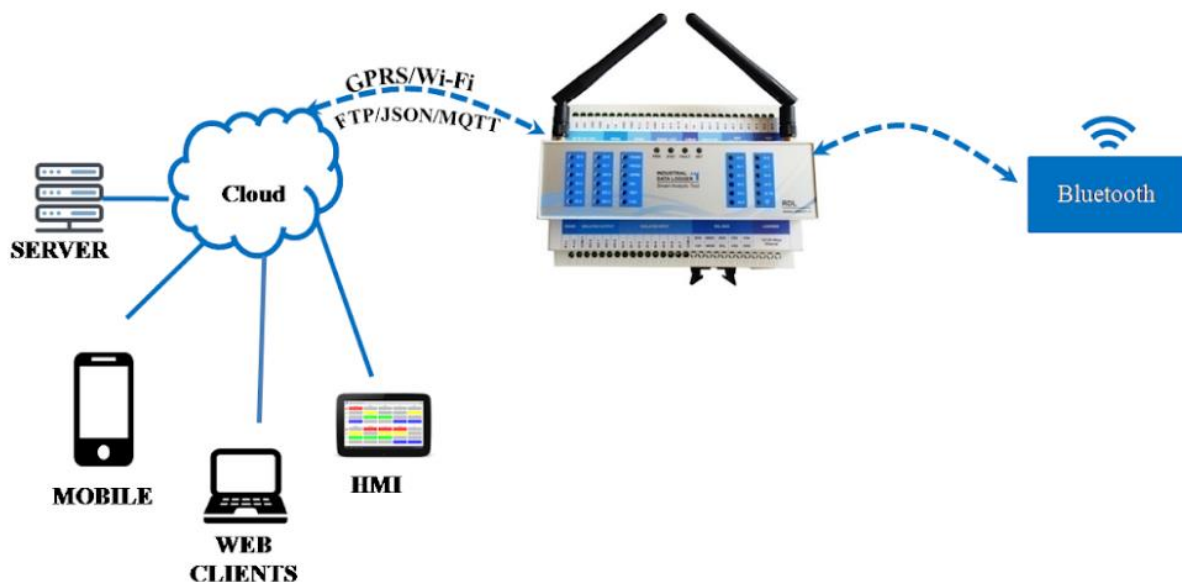


## 2. Interfacing Industrial Data Logger with LoRA

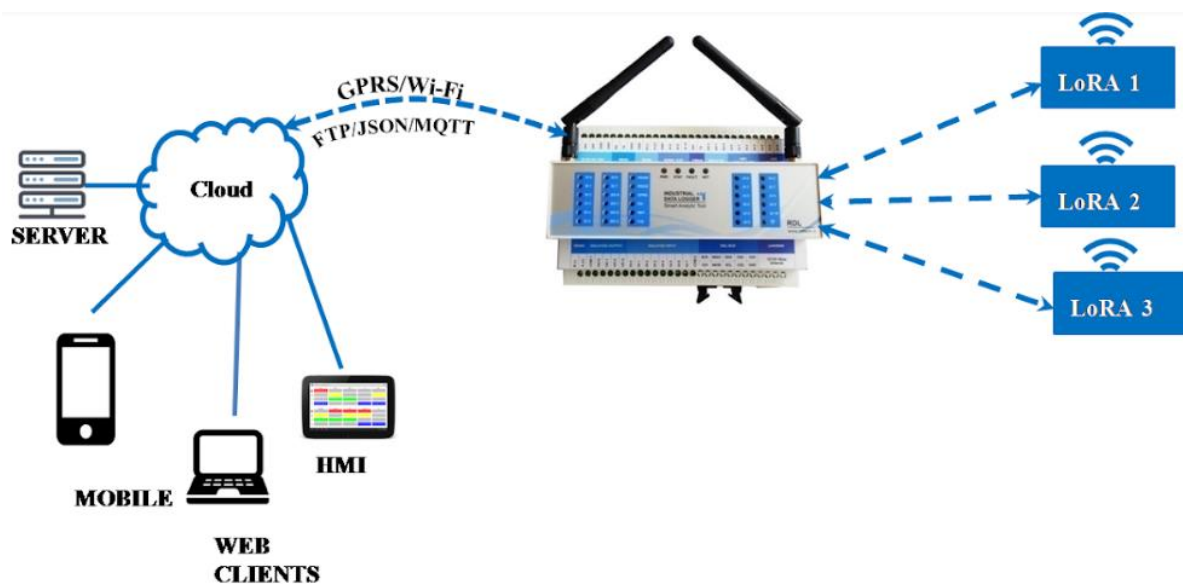

## 3. Interfacing Industrial Data Logger with Xbee

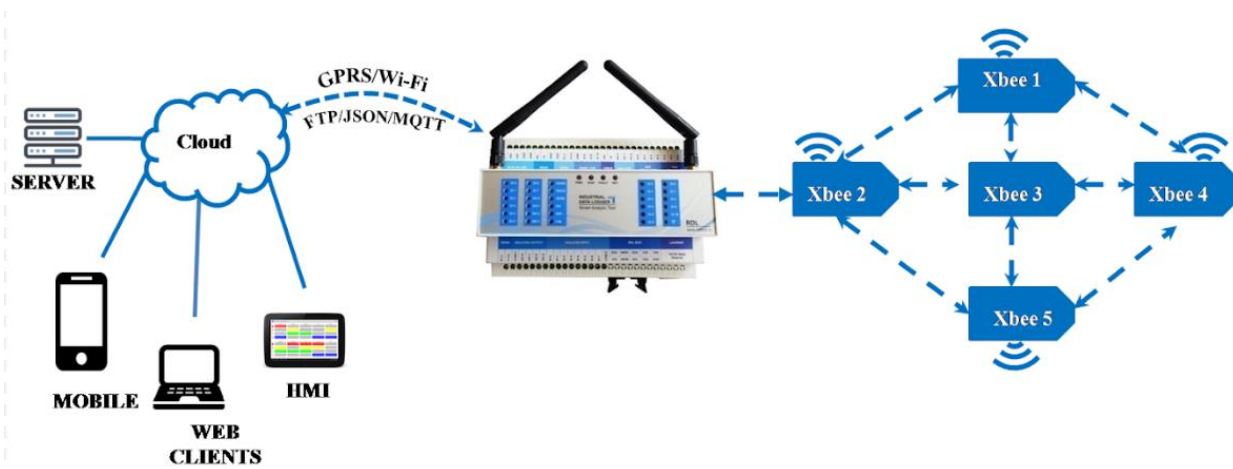

#### 4. Interfacing Industrial Data Logger with Wi-Fi (ESP32)

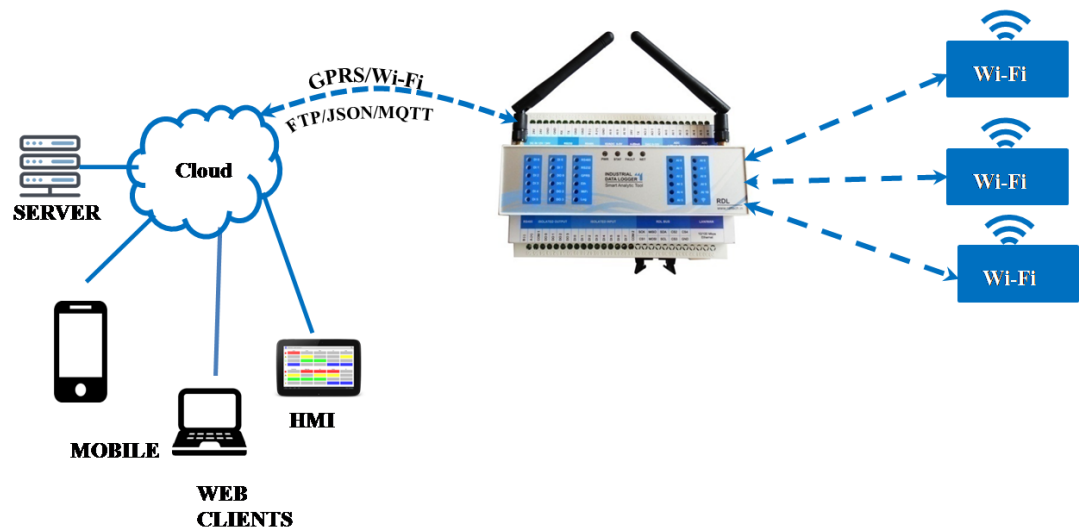

#### Example Code

You may look into the following link for examples on esp8266.

<https://www.arduino.cc/en/Reference/WiFiServer>

#### 8.11. GSM


This is specifically used for M2M and remote data logging and control applications.

#### Specification


- Quectel M95, Quad-Band 850/900/1800/1900MHz.
- Serial interface for direct communication with PC or MCU.
- Configurable baud rate.
- Power controlled using 29302WU IC.
- ESD Compliance.
- Enabled with Audio jack.
- With push pull SIM card holder.
- With Stub antenna and SMA connector.
- Input Voltage: 12V DC.



## Functional Diagram

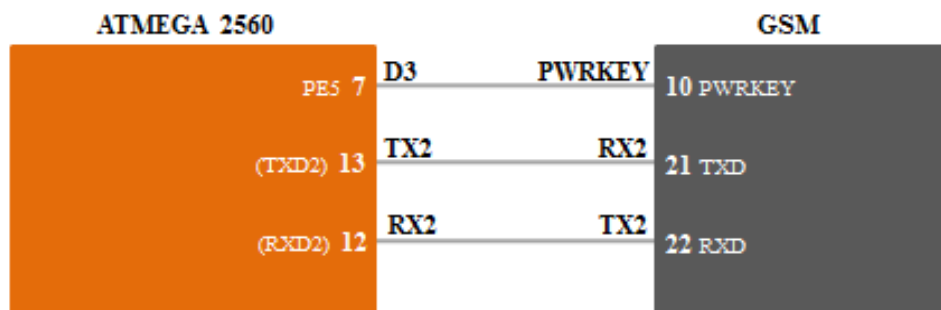

## Use Case

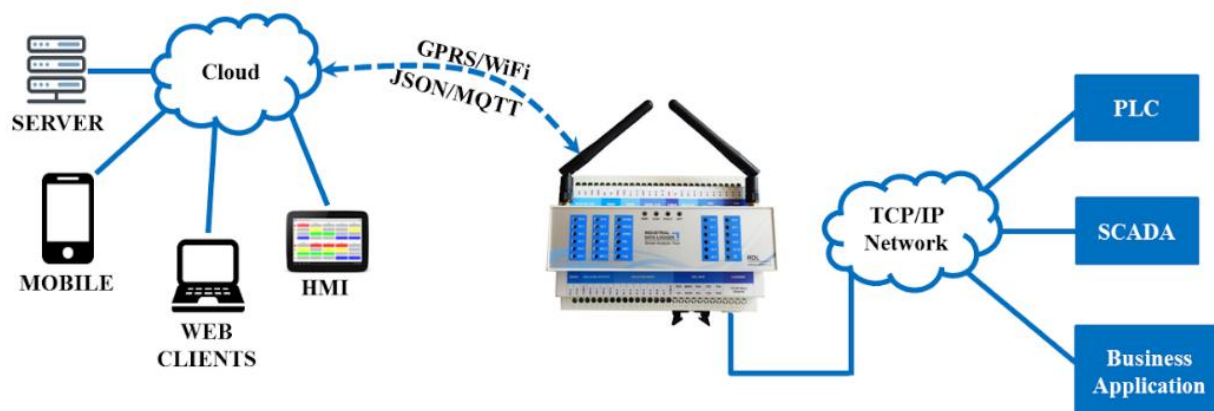

## Example Code

You may look into the following link for examples on GSM.

<https://www.arduino.cc/en/Tutorial/GSMExamplesSendSMS>






## 8.12. RS485 Modbus

- Modbus is an Industrial standard serial communication protocol.
- Open protocol
- Information is stored in the Slave device in four different tables.  
Two tables store on/off discrete values (coils) and two store numerical values (registers). The coils and registers each have a read-only table and read-write table.
- Each table has 9999 values.  
Each coil or contact is 1 bit and assigned a data address between 0000-270E. Each register is 1 word = 16 bits = 2 bytes and also has data address between 0000 and 270E.
- Supported Functions are
  - Coils
  - Discrete inputs
  - Input Registers
  - Holding Registers.


### Specification

- LTC485 IC.
- Supports slave address up to 32.
- Supports Modbus protocol with RTU and ASCII formats.
- Configurable baud rate from 4800 to 115200.
- Configurable packet format (data bits, parity bit, stop bits)

### Functional Diagram

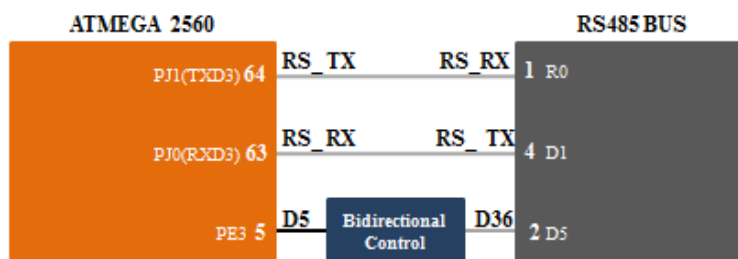

## Use Case

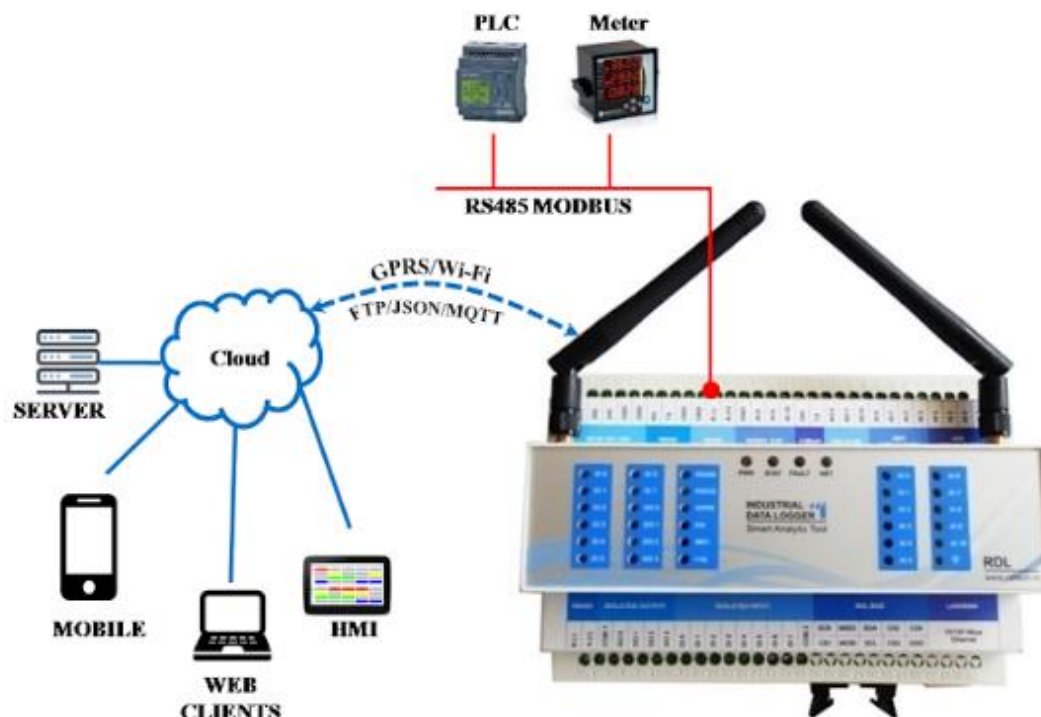

## Example Code


You may look into the following link for examples on Modbus examples.

<https://playground.arduino.cc/Code/ModbusMaster>

### 8.13. RS232/FT232/Program

Used for programming the board. When in user mode, the port could be used for data communication.

#### Functional Diagram

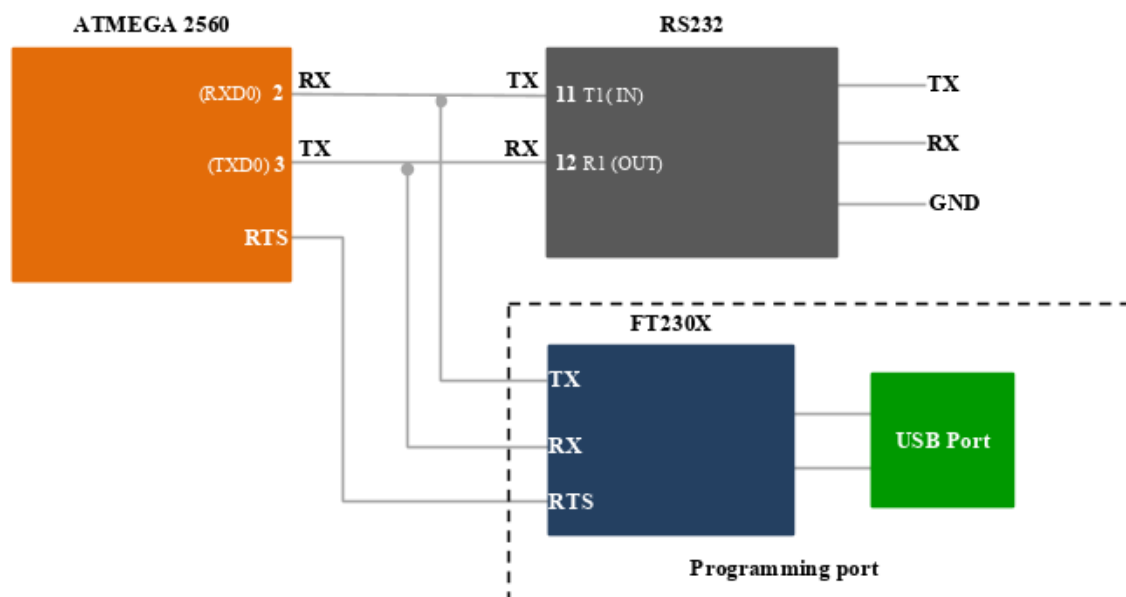

**Note:** When programming the board, it is recommended to remove any connection made to the RS232 serial pins in order to ensure proper functioning of the system.

#### Example Code

You may look into the following link for examples on FT232/MAX232 serial communication.

<https://www.arduino.cc/reference/en/language/functions/communication/serial/>


<https://www.arduino.cc/en/Tutorial/SoftwareSerialExample>

## 8.14. DAC

### Specification


- MCP4768 with I2C serial interface
- Quad, 12-bit voltage output
- Channel: 4 (buffered outputs)
- Internal Voltage Reference
- Output Voltage Range using 0-10V

### Functional Diagram

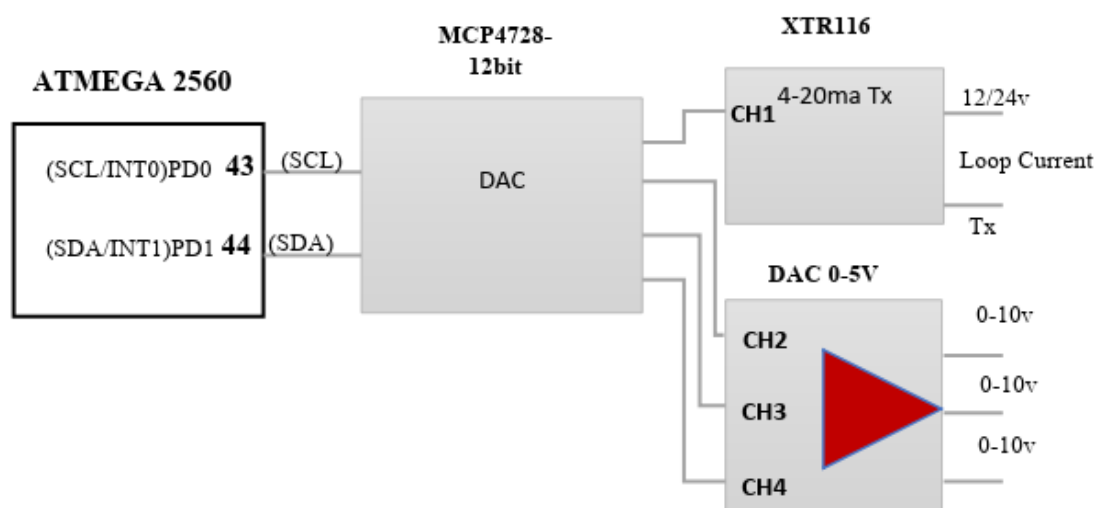


### Application Wiring

#### 1. Interfacing DAC with Motor Speed Control Module

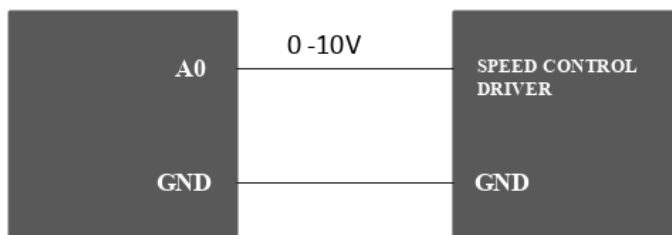


## 2. Interfacing DAC with Motor Speed Control Module using Loop Current

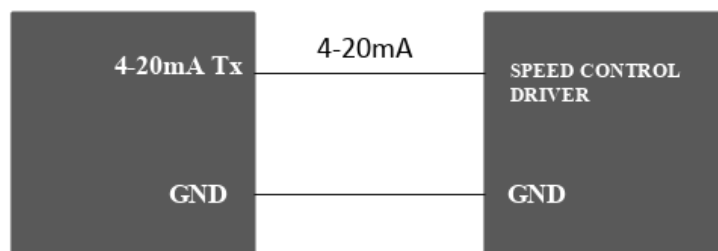


### Use Case


#### 1. Motion Control

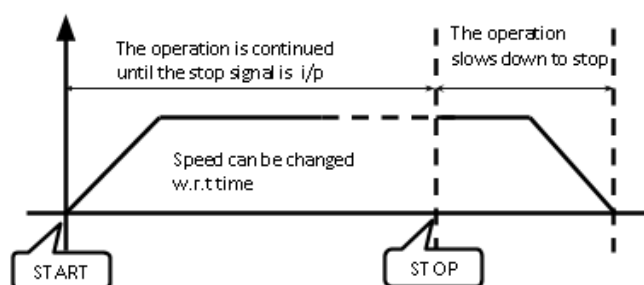


#### 2. Acceleration and Deceleration

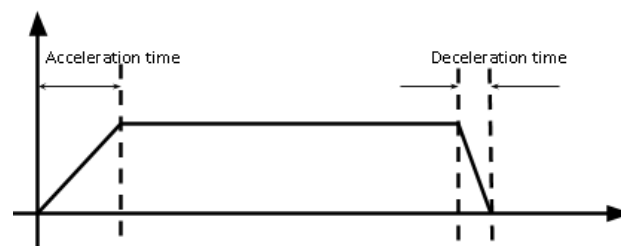

#### 3. Jog Operation and Trapezoidal Control Operation

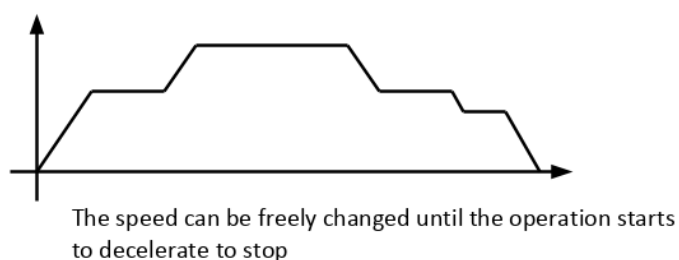

#### 4. Measuring Frequency

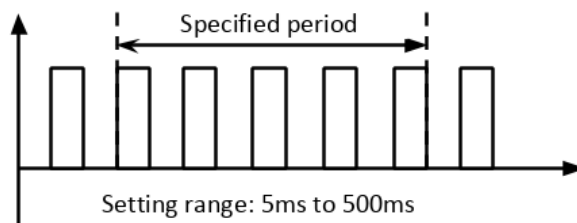

### Example Code

You may look into the following link for the Arduino library and example on DAC.

<https://github.com/hideakitai/MCP4728>




## 8.15. Status LED Display

Status LED's can be programmed as per used needs for visual indication of an event.

Refer [Digital Output Section](#)

### Functional Diagram

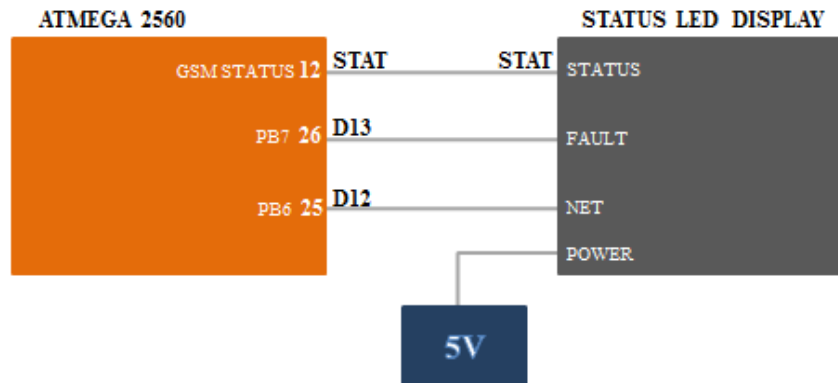

### Example Code

You may look into the following link for more details on programming LED pins.

<https://www.arduino.cc/en/Reference/digitalWrite>




## 8.16. RDL Bus


### Specification

- Extend I/O pins for communicating with external devices.
- Extends SPI pins, I2C pins, UART pins and Digital I/O pins.

### Functional Diagram

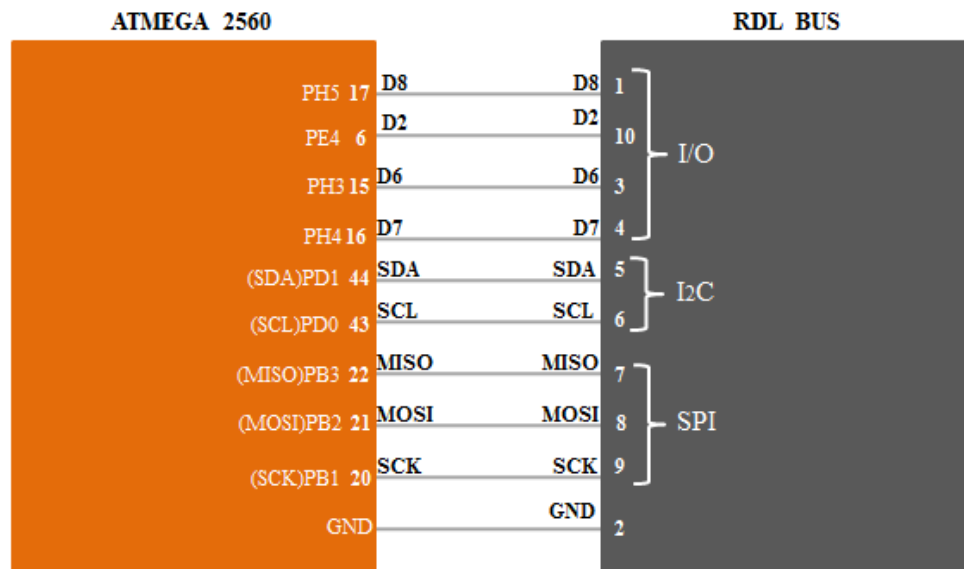

### Application Wiring

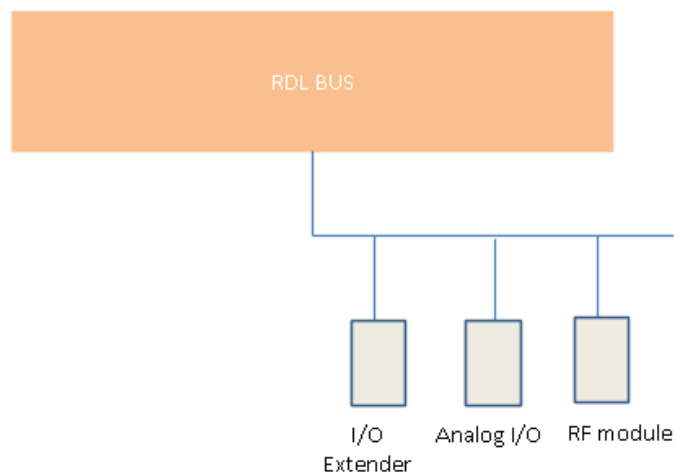





## 8.17. STM32


Extend I/O pins for complex controller operations so as to reduce load on AVR. For example Complex math operations can be assigned to STM32 controller by establishing physical connection with AVR controller.

Currently, some I/O pins are used for LED status indication as per commands received from AVR as shown in the figure below. But user can assign complex task on STM32 controller.

### Specification

- Controller: STM32F030RCT6
- Core: ARM®32-bit Cortex®-M0 CPU with frequency 48 MHz
- 256KB flash, 32KB RAM, 51 IO pins.
- CRC calculation unit
- One 12-bit, 1.0µs ADC (up to 16 channels)
- 2 I2C, 6 USART, 2 SPI, 11 timers.


### Functional Diagram

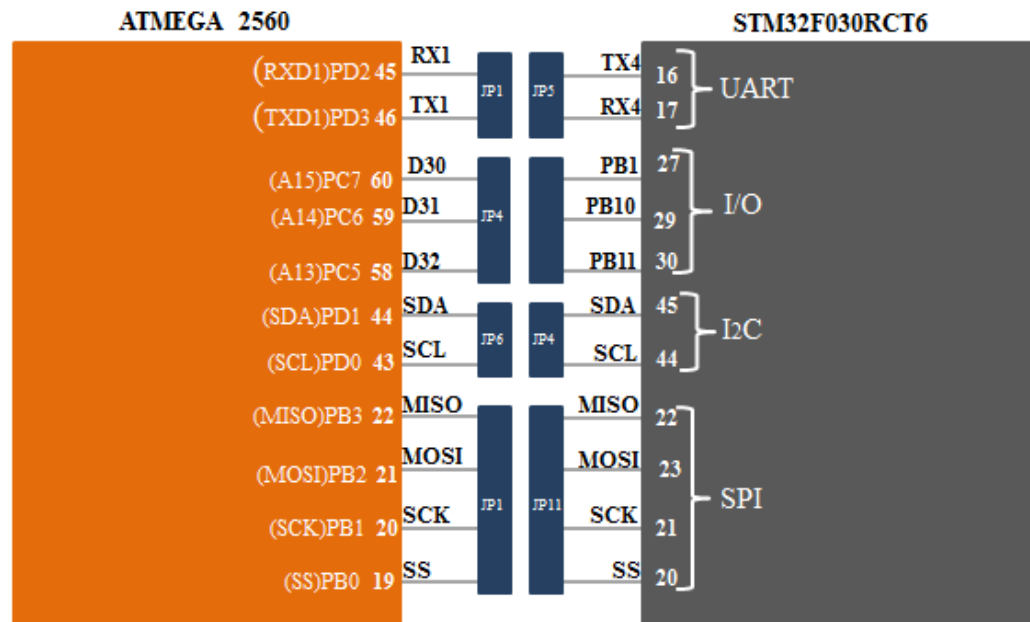

**Note:** Physical Connection must be enabled to establish communication between ATMEGA2560 and STM32



## Application Diagram

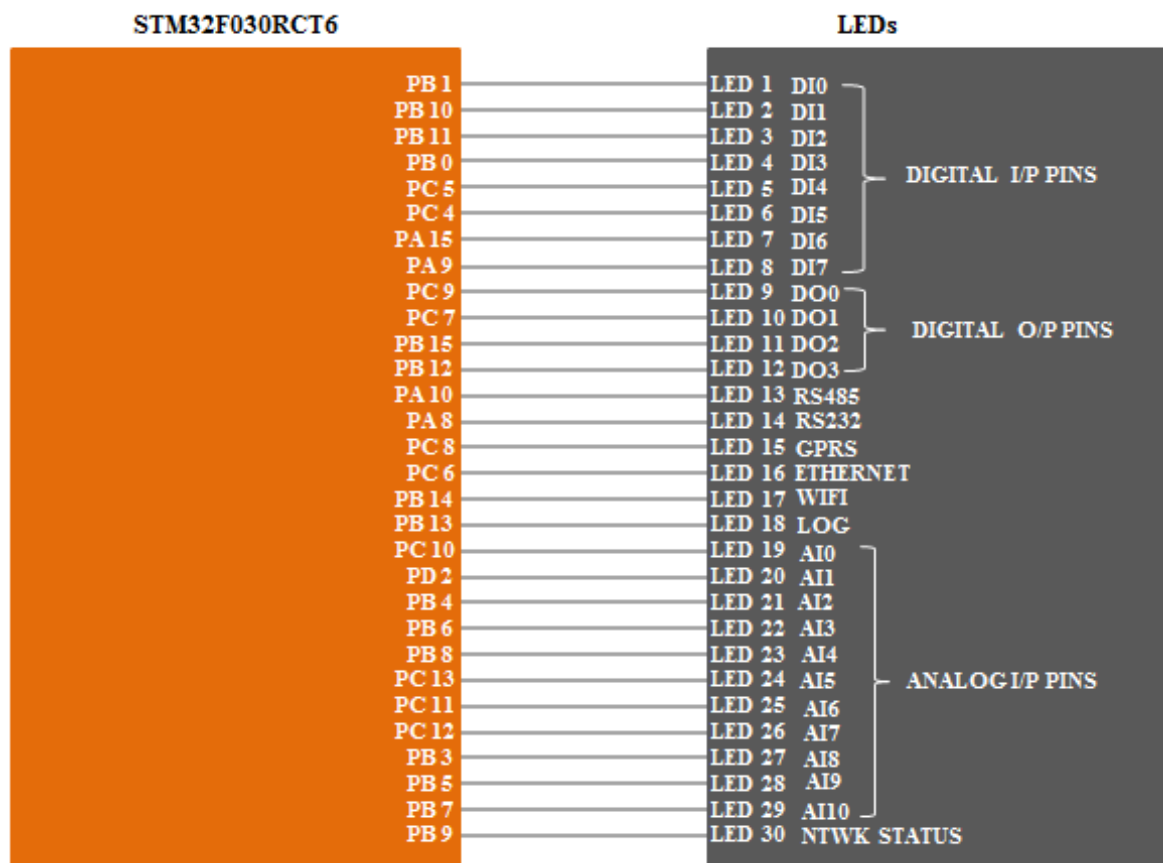

## 9. Power Supply

Model number from 7000 – 7008 work with power supply

Model	Input Voltage	Vmin	Vmax
7000 - 7004	12V - 36V	12V	30V
7004 - 7008	12V - 15V	12V	15V



## 10. Order Information Table

Table-I:



Model	RDL7000	RDL7001	RDL7002	RDL7003	RDL7004	RDL7005	RDL7006	RDL7007	RDL7008
DI	8	8	8	8	8	8	8	8	8
DO	3	3	3	3	3	3	3	3	3
ADC/4-20ma	8	8	8	8	8	8	8	8	8
DAC	x	x	x	x	x	x	3	3	3
4x20ma Tx	x	x	x	x	x	x	1	1	1
GPRS	x	x	x	x	x	1	1	1	1
Ethernet 10/100mbps	x	x	x	x	1	1	1	1	1
RS485	1	1	1	1	1	1	1	1	1
RS232	1	1	1	1	1	1	1	1	1
Wi-Fi	x	x	x	x	1	1	1	1	1
Bluetooth	x	x	x	1	x	x	x	x	x
LoRA	x	x	1	x	x	x	x	x	x
Custom	8	3	1						

### Ordering Information:

Model No + Custom Configuration



Example:

RDL7008WI - It comes with all the above features listed in Table-I with Wi-Fi enabled.

RDL7008BT - It comes with all the above features listed in Table-I with Bluetooth enabled

RDL7008LO - It comes with all the above features listed in Table-I with LoRA enabled.

RDL7008RS - It comes with all the above features listed in Table-I with RS-485 bus.

RDL7008 - It comes with the only features listed in Table-I



## 11. References and Datasheets

1. [http://ww1.microchip.com/downloads/en/DeviceDoc/Atmel-2549-8-bit-AVR-Microcontroller-ATmega640-1280-1281-2560-2561\\_datasheet.pdf](http://ww1.microchip.com/downloads/en/DeviceDoc/Atmel-2549-8-bit-AVR-Microcontroller-ATmega640-1280-1281-2560-2561_datasheet.pdf)
2. <http://www.ti.com/lit/ds/symlink/max232.pdf>
3. <http://ww1.microchip.com/downloads/en/DeviceDoc/40001441F.pdf>
4. <http://ww1.microchip.com/downloads/en/DeviceDoc/20005685A.pdf>
5. <http://www.ti.com/lit/ds/symlink/lm2576hv.pdf>
6. <https://www.vishay.com/docs/83513/tcmd1000.pdf>
7. <http://www.analog.com/media/en/technical-documentation/data-sheets/485fm.pdf>
8. <http://www.ti.com/lit/ds/symlink/lm317.pdf>
9. <http://www.ti.com/lit/ds/symlink/ads1115.pdf>
10. <http://ww1.microchip.com/downloads/en/DeviceDoc/20005045C.pdf>
11. <https://www.fujitsu.com/uk/Images/MB85RC256V-20171207.pdf>
12. <http://ww1.microchip.com/downloads/en/DeviceDoc/mic811.pdf>
13. [http://wizwiki.net/wiki/lib/exe/fetch.php?media=products:w5500:w5500\\_ds\\_v106e\\_141230.pdf](http://wizwiki.net/wiki/lib/exe/fetch.php?media=products:w5500:w5500_ds_v106e_141230.pdf)
14. <http://www.analog.com/media/en/technical-documentation/data-sheets/485fm.pdf>
15. <http://ww1.microchip.com/downloads/en/DeviceDoc/22187E.pdf>
16. <http://www.ti.com/lit/ds/symlink/xtr115.pdf>