

**MALTEPE UNIVERSITY, DEPARTMENT OF SOFTWARE ENGINEERING**  
**SE356 WEB APPLICATION DEVELOPMENT LAB ASSIGNMENT**

**Assignment 02:** Formatting the e-commerce website using CSS

**Due Time:** 28.02.2020 end of practical session.

**Details:**

In this assignment, you are supposed to format your e-commerce website that you start on the first week. You need to use CSS for changing styles of website elements.

**Step 1:** Create an external CSS file and define the given rules;

1. Choose a layout for your website from below and apply the required div selectors.
2. Create a selector called “menu” or “navigation” for formatting menu items with letter-spacing: 0.3em, word-spacing: 0.2em.
3. Re-design your menu items as unordered list with text-decoration as none and color as white or black. Additionally add required rules for; when mouse over text-decoration is underline and color is red or whatever you want.
4. Set margin values for menu items as “10px” and padding left as “25px”.
5. Apply a background color or image to all pages on your website that is suitable with the design.
6. Format your text as; font family with “Tahoma or Verdana or Courier” and font size between “10” and “12” point.
7. Specify the header text as h2 with text-decoration as underline.

**Step 2:** Reference your CSS file from all pages of your website.

**Step 3:** Edit your Contact page’s address and phone number as italic form. Note that, this style should override the rules that is declared in the external CSS file

**Step 4:** In the footer part create a link with text Maltepe University for opening the URL [www.maltepe.edu.tr](http://www.maltepe.edu.tr). This link’s color should be blue and text decoration should be underline.

***Note:** Your work is examined and reviewed on the last 10-15 minutes and your scores will be published via BLACKBOARD.*

**WEBSITE LAYOUTS:** You can either choose one of the layouts or design your own self.

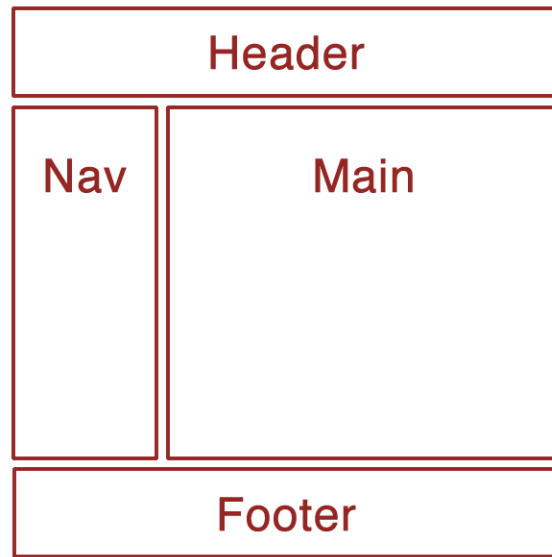


Figure 01 : Layout 1

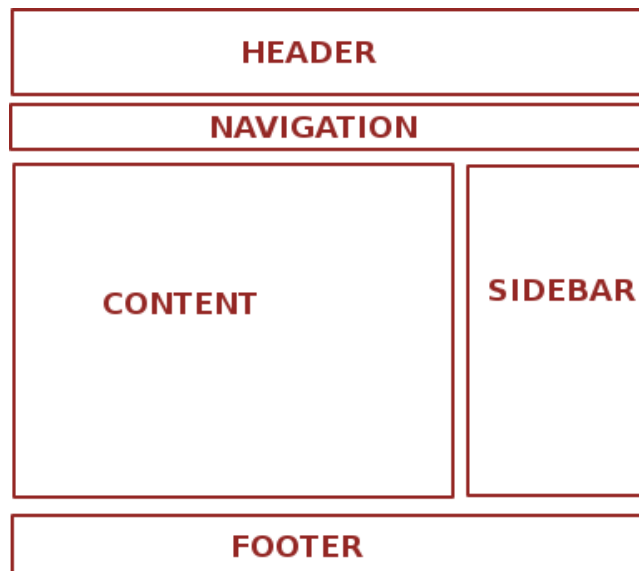


Figure 2 : Layout 2

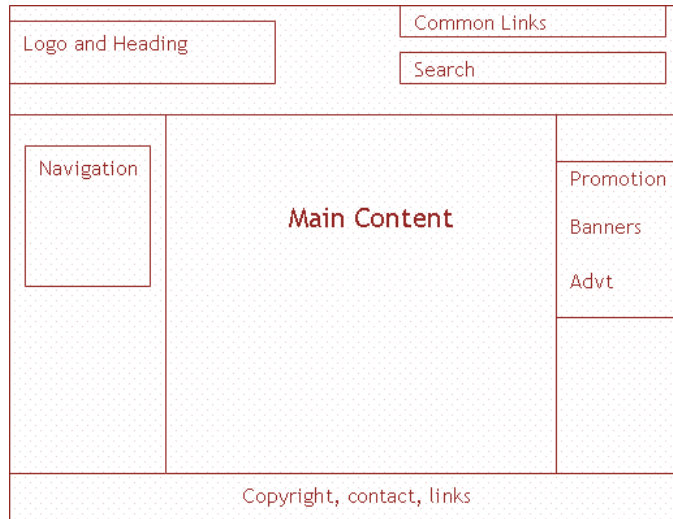


Figure 3 : Layout 3

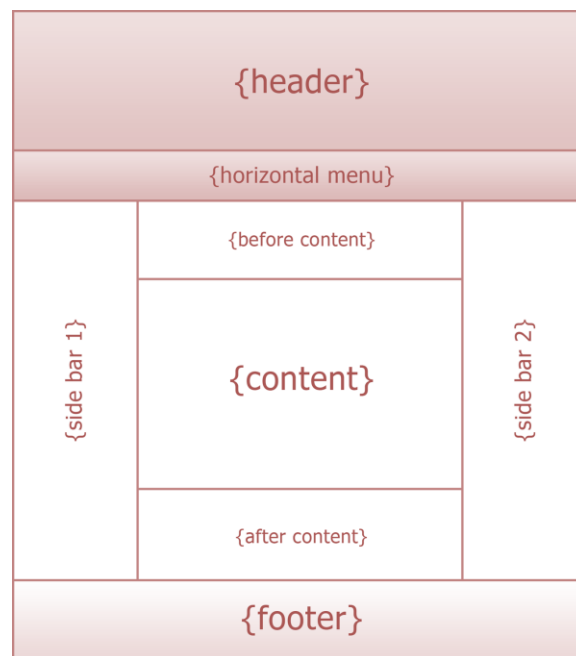


Figure 4 : Layout 4