


Some Cheap chinese FTDI cables use a fake chipset from Prolific. Prolific has prohibited the use of these cables. Windows does detect them but they are not usable. Use these 8 easy steps to install the driver.

1. Opening the device manager shows the driver as “PL2303HXA PHASED OUT SINCE 2012. PLEASE CONTACT YOUR SUPPLIER.”

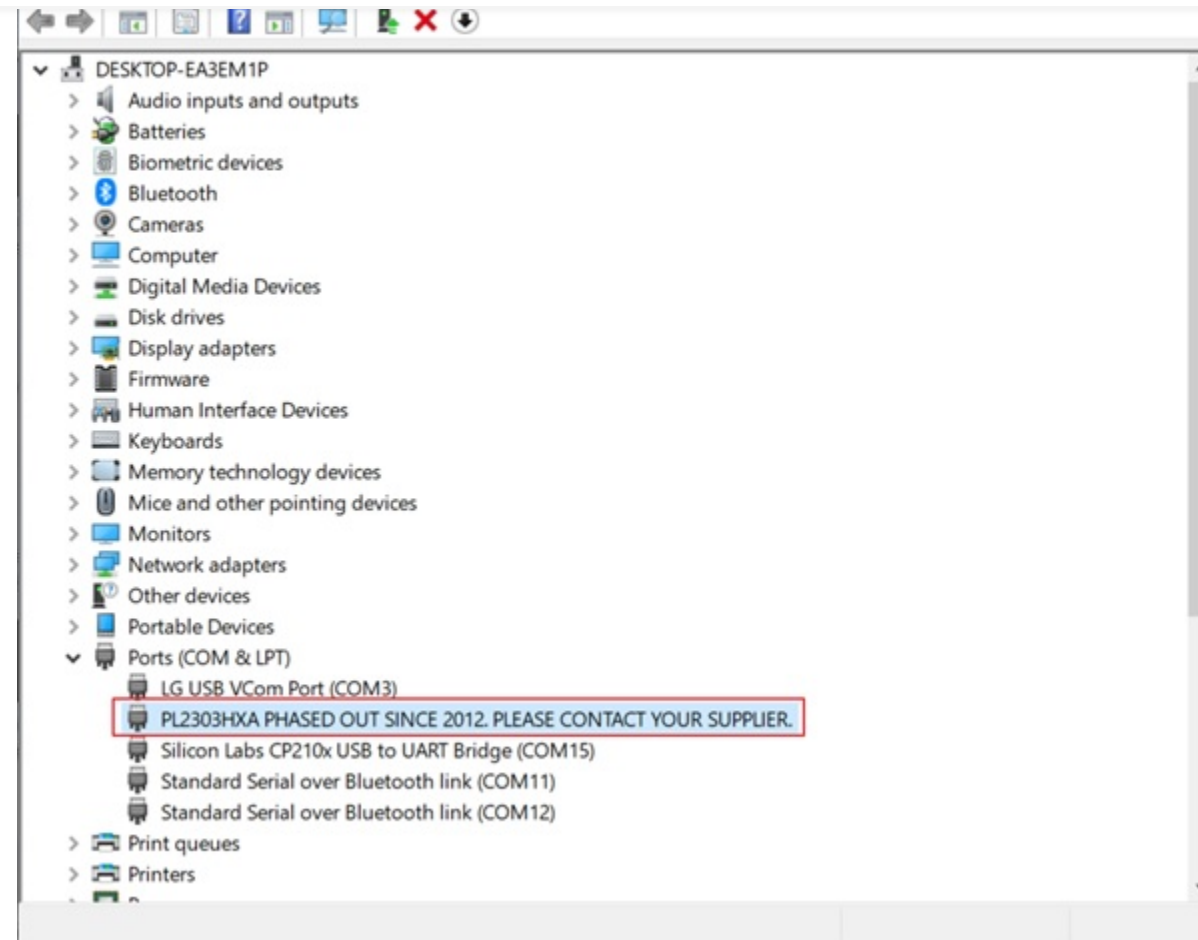

2. To solve this, you can download the driver [here](#).

3. Unzip the archive and Install the driver. Go to the next step.

DSMR P1 – Slimme meter via WiFi adapter met display



Deze adapter of maakt het mogelijk om een slimme meter via wifi te verbinden met bijvoorbeeld Domoticz, Home Assistant en ... Continue reading

4. Open device manager. Right click on the unrecognized device and select “Update Driver”.

←  Update Drivers - PL2303HXA PHASED OUT SINCE 2012. PLEASE CONTACT YOUR SUPPLIER.



How do you want to search for drivers?

→ Search automatically for drivers

Windows will search your computer for the best available driver and install it on your device.

→ Browse my computer for drivers

Locate and install a driver manually.

Cancel

6. Select “Let me pick from a list of available drivers on my computer”

Browse for drivers on your computer

Search for drivers in this location:

C:\Users\voel\Documents

Browse...

☒ Include subfolders

→ Let me pick from a list of available drivers on my computer


This list will show available drivers compatible with the device, and all drivers in the same category as the device.

Next

Cancel

7. First select “Show compatible hardware” and then select “Prolific USB-to-Serial Comm Port Version 3.3.2.105 [27/10/208]” from the list. Click Next.

8. The driver is now installed successfully and is even maintained after a reboot.

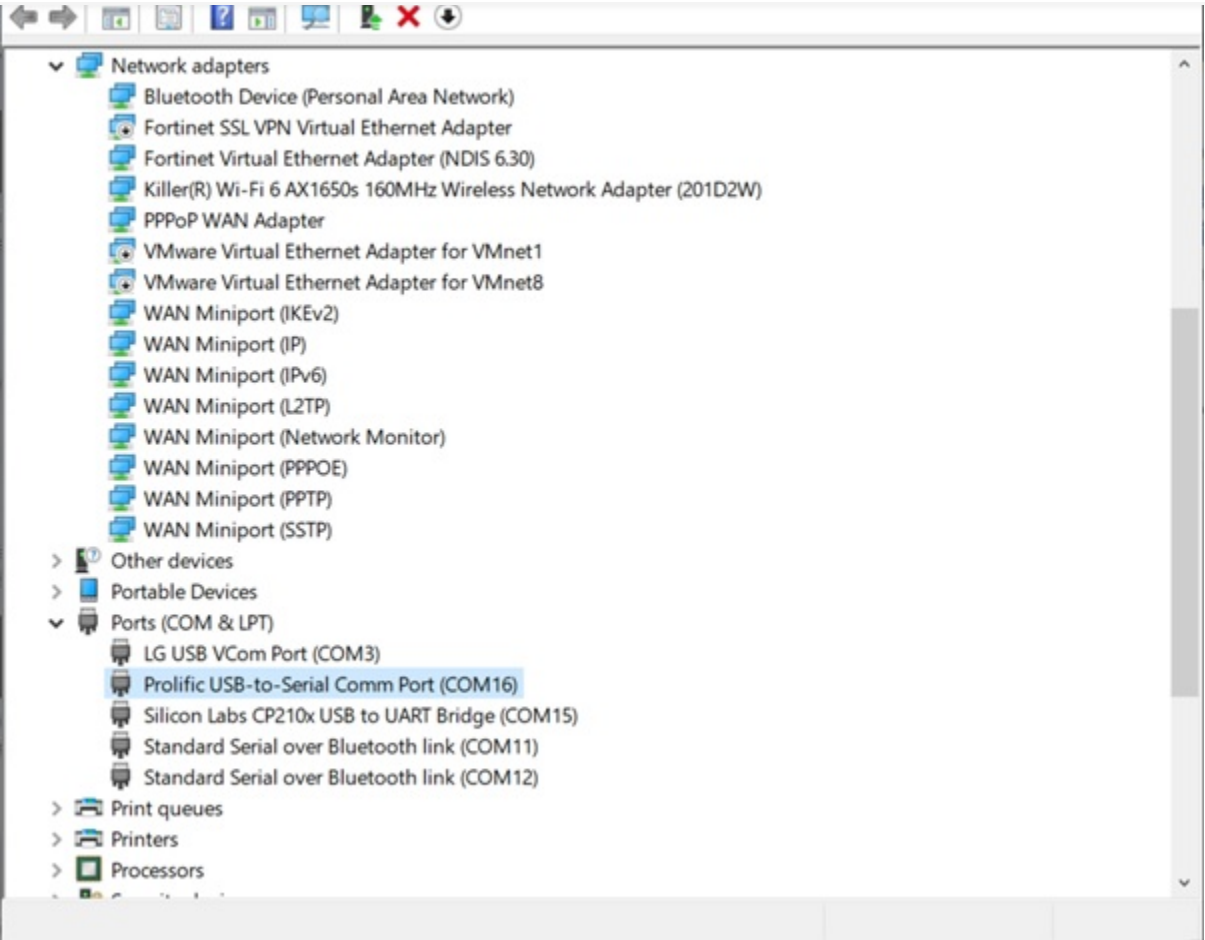

FTDI

INSTALL PL2303HXA

PL2303HXA

PL2303HXA DRIVER

PL2303HXA MANUAL


PROLIFIC

PROLIFIC PL2303HXA



Roel van Wanrooy

ALL AUTHOR POSTS

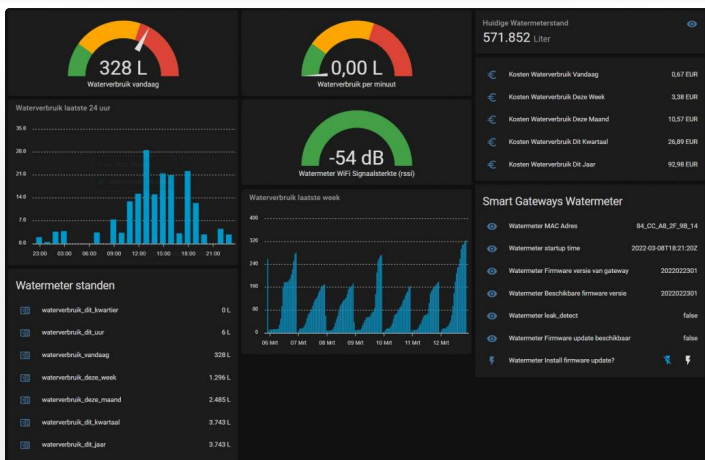

04/03/2022

Watermeter Dashboard Voor Home Assistant Inclusief Kosten En Lekkage Detectie



by Roel van Wanrooy



Bespaar Energie Met Een Slimme Stekker



by Roel van Wanrooy

16 COMMENTS



REPLY

This installation worked for me. But unfortunately the COM port still doesn't work. And if I power cycle the Prolific device it shows a yellow triangle. Any ideas?

REPLY





enable all the hidden devices in the device manager to uninstall those too.



Willem

REPLY

16/10/2020, 11:48

Removing all my old COM ports does actually remove the yellow triangle! I didn't know this one.

But I cannot still not connect but that might be a hardware issue as well



Menouer

REPLY

27/02/2021, 18:56

Done thank you



Bernardos

REPLY

11/03/2021, 18:40

It worked for an ICSTATION UNO R3 compatible board, on windows 10.

Thank you so much !



Roel Van Wanrooy

REPLY

21/03/2021, 15:48

Good to read it worked Bernardos! Happy programming!



Petr Krejčí

REPLY

14/03/2021, 10:54

Thank You. This was very helpful.



Roel Van Wanrooy

21/03/2021, 15:48

Thanks Petr!



Harry Purwanto

REPLY

16/03/2021, 13:23

Hi Roel,
Thank you very much.
Very simple to do it, by following your guidance.
It's working now.

GOD bless you.



Roel Van Wanrooy

REPLY

21/03/2021, 15:47

Thanks Harry,

Good to read it worked for you. Have a nice day!



Harry Purwanto

REPLY

30/03/2021, 10:48

Hi Roel,
How to change the printer setting in order can print the paper without blank margin (fit as the ticket picture)?
It's looked the object in a center paper, so when print in landscape mode, about 7 cm blank paper in left of ticket.



David Wallis

REPLY

21/04/2021, 17:24

I found V 3.4.67.325 dated 15/08/2014 worked where your suggestion of 27/1/2008 didn't work. With your suggestion I had error 8020 which the Internet said was an incorrect driver,



Roel Van Wanrooy

REPLY

24/04/2021, 15:30

Hi David,

Thanks for your reply on this post. This will help other people to solve this problem too!



Olle

REPLY

25/04/2021, 13:34

Big thanks! This post saved my day. 😊



Charlie Col

REPLY

23/05/2021, 09:10

Great help, I recovered my adapter and also learned something new.
Many thanks, guru !



Lucien

REPLY

16/03/2022, 12:19

Roel,

Super!!!

I dusted off my old Sweex USB-to-serial and it didn't work with Windows10. It is now brought back to life.

Now i can use my CM11A again to send /receive X10 command over the wire with HS4.

ADD COMMENT

Name *

Email *

Website

☐ Save my name, email, and website in this browser for the next time I comment.

I'm not a robot

reCAPTCHA
Privacy - Terms

POST COMMENT

[< PREV](#)

MAIN BLOG

[NEXT >](#)

ABOUT US

Unicode is a pixel perfect creative multiuse WordPress Theme designed with terrific attention to details, flexibility and performance.

LATEST BLOG NEWS

Gasmeter dashboard voor Home Assistant inclusief kosten

04/03/2022

RECOMMENDED POSTS

Connecting a Smart Electricity Meter from Sweden to Home Assistant

TAGS

3D PRINTED DRAGINO CASE BGP

DRAGINO DRAGINO CASE

DRAGINO GPS DRAGINO GPS BOX

almost any needs.

lekkage detectie

04/03/2022

Bespaar energie met een slimme stekker

30/11/2021

fortigate firewalls

Installatie van zigbee2mqtt binnen

Home Assistant

S0-Gateway voor gebruik binnen

Home Assistant, Domoticz en

MQTT

How to configure the management port of a FortiSwitch managed by a

FortiGate firewall via a FortiLink

interface

DRAGINO LGT-92

DRAGINO LORA

DRAGINO LORAWAN

FAILOVER

FORTINET

FTDI

GEIGER COUNTER

GEIGER MUELLER TUBE

GPS TRACKER

GRAFANA

HASS

HOME-ASSISTANT

HOME ASSISTANT

INFLUX

INFLUXDB

LGT-92 BOX

LGT-92 CASE

LORA

LORA GPS TRACKER

LORAWAN

NETSCALER

NETSCALER HOME ASSISTANT

NODE-RED

NODERED

RADIATION SENSOR

RADIOACTIVITY SENSOR

REDUNDANT

REVERSE PROXY

THETHINGSNETWORK

THE THINGS NETWORK

TRACKMAP

TRACKMAP PLUGIN

TTL-USB

TTN

UNABLE TO LOGIN TO HOME ASSISTANT

VPN

WEBSOCKETS