


$$W_1 = U_{RT} \cdot I_R \cdot \cos(\widehat{U_{RT}, I_R})$$

$$W_2 = U_{ST} \cdot I_S \cdot \cos(\widehat{U_{ST}, I_S})$$

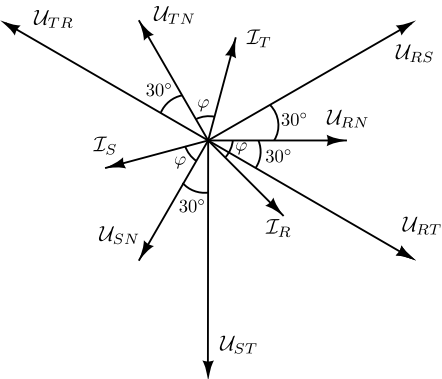

$$W_1 = U_L \cdot I_L \cdot \cos(\varphi - 30^\circ) = \frac{P}{2} + \frac{Q}{2 \cdot \sqrt{3}}$$

$$W_2 = U_L \cdot I_L \cdot \cos(\varphi + 30^\circ) = \frac{P}{2} - \frac{Q}{2 \cdot \sqrt{3}}$$

$$W_1 + W_2 = P$$

$$W_1 - W_2 = \frac{Q}{\sqrt{3}}$$