

9.15.1.5. Short Idle Time (SIT) ICD

ICDs with [Slow Polling Interval](#) shorter than or equal to 15 seconds SHOULD be configured as a Short Idle Time ICD. For example, this is a typical scenario for door locks and window coverings, where commands need to be sent to the ICD with a use case imposed latency requirement. Typically, devices that are Short Idle Time ICDs are not initiators in the communication flow.

Requirements

A SIT ICD SHALL advertise its [SESSION_IDLE_INTERVAL](#) per [SII](#). It SHALL also advertise its [SESSION_ACTIVE_INTERVAL](#) per [SAI](#). The device MAY have a [user action](#) that triggers the ICD to transition to Active mode.

Having a long [ActiveModeThreshold](#) makes the ICD more responsive for subsequent messages at the expense of increased power consumption. The ICD stays in [Active Mode](#) for the entire duration of the [ActiveModeThreshold](#).

On the other hand, having an [ActiveModeThreshold](#) of 0 means that the device might enter [Idle Mode](#) immediately after the last active [exchange](#) is closed. One good example is if a client reads five attributes in a row from an ICD and the [ActiveModeThreshold](#) is 0 then it MAY have to wait up to one [Idle Mode Duration](#) after each attribute read.

In order to get the benefits of the [ActiveModeThreshold](#) attributes while keeping the power consumption low, the ICD MAY ignore the [Active Mode Threshold](#) and immediately return to [IdleMode](#) upon the completion of an exchange if the ICD was the Initiator of the exchange being closed and there are no other reasons keeping it in [active mode](#).

9.15.1.6. Long Idle Time (LIT) ICD

ICDs with a [Slow Polling Interval](#) longer than 15 seconds SHOULD be configured as Long Idle Time ICDs. For example, this is a typical scenario for sensors and light switches, where data reports are initiated by the ICD for an updated sensed value or a switch event. Typically, devices that are Long Idle Time ICDs are initiators in the communication flow.

Overview

The high-level steady state behavior of a LIT ICD is to alternate between long IDLE mode periods and short ACTIVE mode periods, where the ACTIVE mode period begins with a transmission to registered clients. A graphical depiction of ICD steady state behavior is shown in [Figure 78, “ICD Steady State Behavior Diagram”](#).

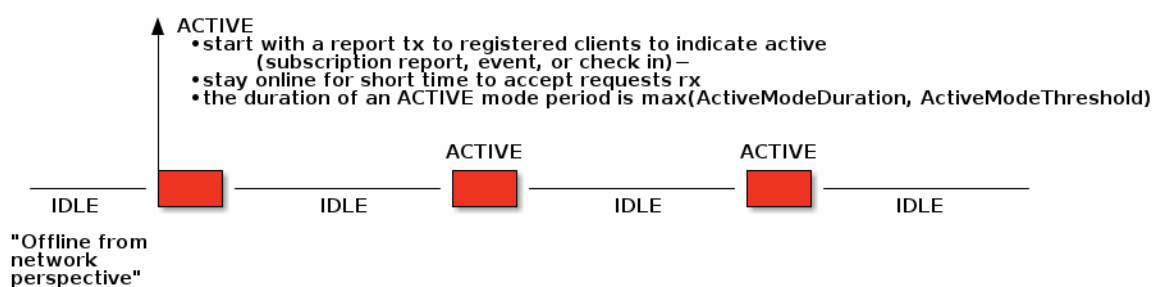


Figure 78. ICD Steady State Behavior Diagram