

1. Description

1.1. Project

Project Name	RAK3172
Board Name	custom
Generated with:	STM32CubeMX 6.8.1
Date	06/10/2023


1.2. MCU

MCU Series	STM32WL
MCU Line	STM32WLEx
MCU name	STM32WLE5CCUx
MCU Package	UFQFPN48
MCU Pin number	48

1.3. Core(s) information

Core(s)	ARM Cortex-M4

2. Pinout Configuration

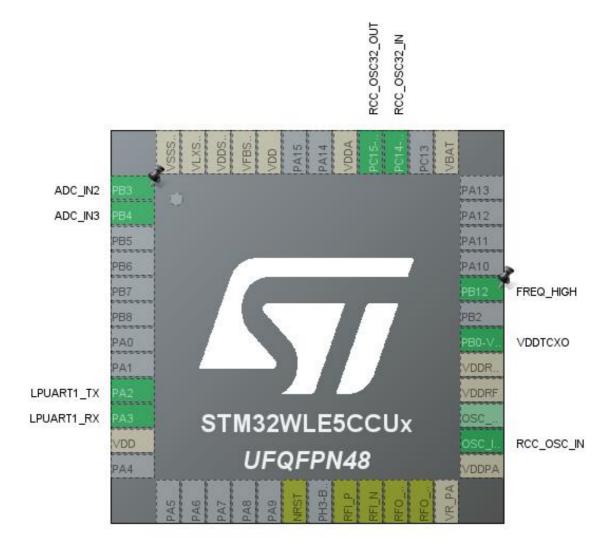


3. Pins Configuration

Pin Number UFQFPN48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PB3	I/O	ADC_IN2	
2	PB4	I/O	ADC_IN3	
9	PA2	I/O	LPUART1_TX	
10	PA3	I/O	LPUART1_RX	
11	VDD	Power		
18	NRST	Reset		
20	RFI_P	MonolO		
21	RFI_N	MonolO		
22	RFO_LP	MonolO		
23	RFO_HP	MonolO		
24	VR_PA	Power		
25	VDDPA	Power		
26	OSC_IN	MonolO	RCC_OSC_IN	
28	VDDRF	Power		
29	VDDRF1V55	Power		
30	PB0-VDD_TCXO	I/O	VDDTCXO	
32	PB12 *	I/O	GPIO_Input	FREQ_HIGH
37	VBAT	Power		
39	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
40	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
41	VDDA	Power		
44	VDD	Power		
45	VFBSMPS	Power		
46	VDDSMPS	Power		
47	VLXSMPS	Power		
48	VSSSMPS	Power		

^{*} The pin is affected with an I/O function

4. Clock Tree Configuration

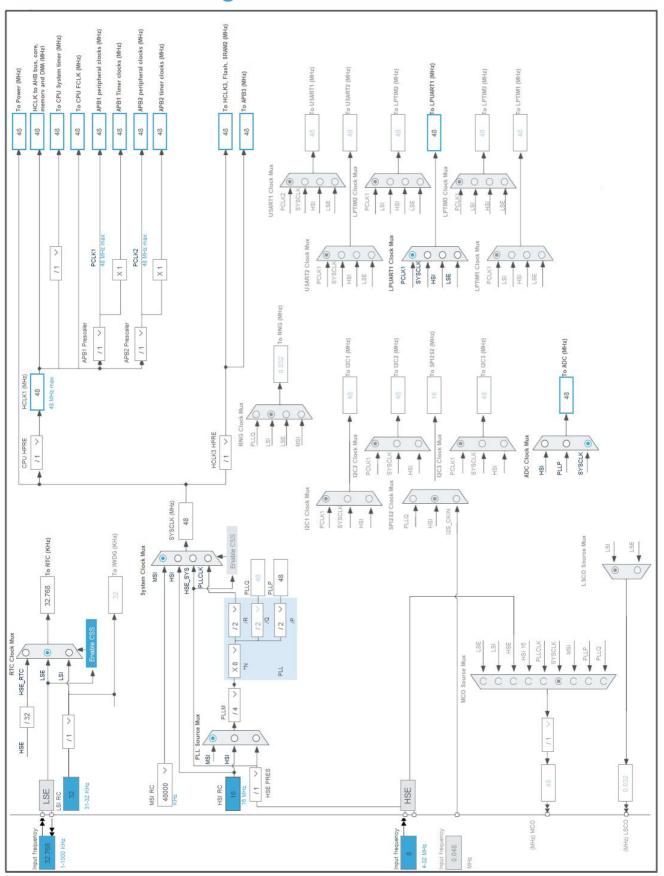

Page 4

5. Software Project

5.1. Project Settings

Name	Value	
Project Name	RAK3172	
Project Folder	C:\Users\danam\STM32CubeIDE\workspace_1.7.0\RAK3172	
Toolchain / IDE	STM32CubeIDE	
Firmware Package Name and Version	STM32Cube FW_WL V1.3.0	
Application Structure	Advanced	
Generate Under Root	Yes	
Do not generate the main()	No	
Minimum Heap Size	0x200	
Minimum Stack Size	0x400	

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	Yes
consumption)	
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_RTC_Init	RTC
5	MX_SUBGHZ_Init	SUBGHZ
6	MX_ADC_Init	ADC
7	MX_LoRaWAN_Init	LORAWAN
8	MX_LPUART1_UART_Init	LPUART1

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32WL
Line	STM32WLEx
MCU	STM32WLE5CCUx
Datasheet	DS13105_Rev7

6.2. Parameter Selection

Temperature	25
Vdd	3.0

6.3. Battery Selection

Battery	Li-SOCL2(AAA700)
Capacity	700.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	10.0 mA
Max Pulse Current	30.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP2
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-Medium/SMPS-OFF	NoRange
Fetch Type	SRAM1	NA
CPU Frequency	48 MHz	0 Hz
Clock Configuration	MSI	ALL CLOCKS OFF
Clock Source Frequency	48 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	5.65 mA	885 nA
Duration	0.1 ms	0.9 ms
DMIPS	60.0	0.0
Ta Max	124.53	125
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	565.8 μA
Battery Life	1 month, 21 days,	Average DMIPS	60.0 DMIPS
	1 hour		

6.6. Chart

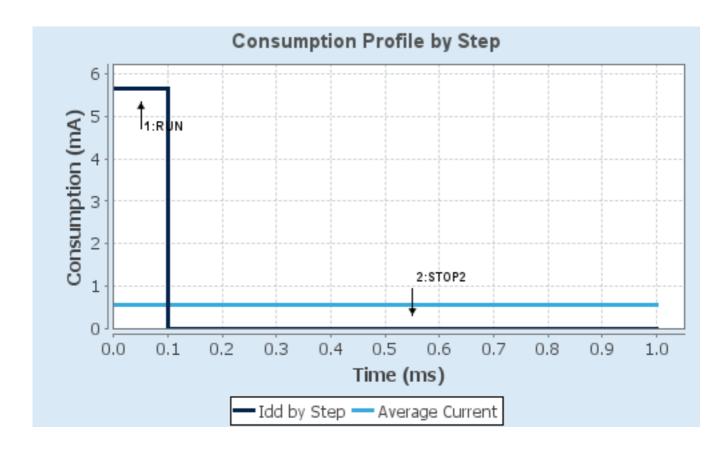

7. Peripherals and Middlewares Configuration

7.1. ADC mode: IN2 mode: IN3

mode: Temperature Sensor Channel

mode: Vrefint Channel7.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler Asynchronous clock mode divided by 64 *

Resolution ADC 12-bit resolution

Calibration Disable

Data Alignment Right alignment
Scan Conversion Mode Disabled

End Of Conversion Selection End of single conversion

Low Power Auto Wait Disabled

Auto Off Enabled *

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

DMA Continuous Requests Disabled

Overrun behaviour

Sequencer

Sequencer set to fully configurable

SamplingTime Common 1 160.5 Cycles *

SamplingTime Common 2 160.5 Cycles *

Oversampling Mode Enabled *
Right Bit Shift 8 bit shift *
Triggered Mode Single trigger

Trigger Frequency Low frequency *

Ratio Oversampling ratio 256x *

ADC_Regular_ConversionMode:

Enable Regular Conversions Disable

7.2. ADV_TRACE

mode: Enabled

7.3. LPUART1

Mode: Asynchronous

7.3.1. Parameter Settings:

Basic Parameters:

Baud Rate 115200 *

Word Length 8 Bits (including Parity)

Parity None Stop Bits 1

Advanced Parameters:

Data Direction Receive and Transmit

Single Sample Disable
ClockPrescaler 1

Fifo Mode FIFO mode enable *

Txfifo Threshold 1 eighth full configuration

Rxfifo Threshold 1 eighth full configuration

Advanced Features:

TX Pin Active Level Inversion

RX Pin Active Level Inversion

Disable

Data Inversion

Disable

TX and RX pins Swapping

Overrun

Enable

DMA on RX Error

MSB First

Disable

7.4. MISC

mode: Enabled

7.5. RCC

High Speed Clock (HSE): TCXO

Low Speed Clock (LSE): Crystal/Ceramic Resonator

7.5.1. Parameter Settings:

System Parameters:

VDD voltage (V) 3.3
Instruction Cache Enabled
Prefetch Buffer Disabled

Data Cache Enabled

Flash Latency(WS) 2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value 64

MSI Calibration Value 0

MSI Auto Calibration Enabled

HSE Startup Timout Value (ms) 100

LSE Startup Timout Value (ms) 5000

LSE Drive Capability

LSE oscillator low drive capability

Power Parameters:

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

7.6. RTC

mode: Activate Clock Source

mode: Activate Calendar
Alarm A: Internal Alarm A
7.6.1. Parameter Settings:

General:

Asynchronous Predivider value RTC_PREDIV_A *

Bin Mode Free running Binary mode *

SSRU Underflow Interrupt Enabled

Alarm A:

Free running 32 bit value 0

Binary AutoControl RTC_ALARMSUBSECONDBIN_AUTOCLR_NO *

Free running 32 bit mask SS[31:0] are compared and must match to activate alarm.

7.7. SEQUENCER

mode: Enabled

7.8. SUBGHZ

mode: Activated

7.8.1. Parameter Settings:

Baudrate Prescaler Value 4 *

7.9. SYS

Timebase Source: None

7.10. TIMER

mode: Enabled

7.11. TINY LPM mode: Enabled

7.12. LORAWAN

mode: Enabled

7.12.1. LoRaWAN application:

Application selection:

Application **End Node skeleton ***

!! Please read carefully Information panel Application configuration recommandations

below!!

board settings:

Send Tx on Timer or Button Evt TX_ON_TIMER

Probes Lines in Platform Settings false

lora_app:

Active region LORAMAC_REGION_US915 *

Transmition duty cycle 30000 *

Application user port

Switch class port 3

CLASS_A Default class

Default handler message state Unconfirmed message

Handler Adaptive Data Rate On Default activation type OTAA Force rejoin at each reboot true

Default Tx output power TX_POWER_0

Default Unicast ping slots periodicity 8000

Default reponse timeout for class b and class c confirmed downlink frames in milli seconds.

sys_conf:

Trace verbose level **VLEVEL H***

Enable Application Logging true Disable Low Power Mode false Enable Sensor false

7.12.2. LoRaWAN commissioning:

Commissioning:

Public network Current network ID 0

se-identity:

App/Join EUI 01,01,01,01,01,01,01,01

Application key A1,C1,50,55,17,70,50,77,DA,24,

BC,E2,E7,BF,1D,A3 *

Network key 91,C1,50,55,17,70,50,77,DA,24,

BC,E2,E7,BF,1D,A3 *

Network session key 2B,7E,15,16,28,AE,D2,A6,AB,F7,15,88,0

9,CF,4F,3C

Application session key 2B,7E,15,16,28,AE,D2,A6,AB,F7,15,88,0

9,CF,4F,3C

lorawan_conf:

Enable Key read access true

7.12.3. LoRaWAN middleware:

lorawan_conf:

Enable LoRaMAC ClassB

Region(s) selection please select the desired region(s) in the

list below

false

Region Asia freq: 923 true *

Region Australia freq: 915
Region China freq: 470
false
Region China freq: 779
false
Region Europe freq: 433
Region Europe freq: 868
true

Region Korea freq: 920 false
Region India freq: 865 false
Region USA freq: 915 true

Region Russia freq: 864 false
Enable Hybrid mode false

Enable the context management storage true *

Select the LoRaWAN Link Layer specification version v1.0.4 *

Enable the additional LoRaWAN packages false
Select the Default channel plan for region AS923
AS923-1

1

radio_conf:

Radio maximum wakeup time (in ms)

radio_board_if:

Select radio Driver

Bsp via extSettings *

mw_log_conf:

Enable Middleware log true

7.12.4. Platform Settings:

RTC RTC ADC ADC LPUART1

^{*} User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC	PB3	ADC_IN2	Analog mode	No pull-up and no pull-down	n/a	
	PB4	ADC_IN3	Analog mode	No pull-up and no pull-down	n/a	
LPUART1	PA2	LPUART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA3	LPUART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
RCC	OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PB0- VDD_TCXO	VDDTCXO	n/a	n/a	n/a	
	PC14- OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15- OSC32_OU T	RCC_OSC32_O UT	n/a	n/a	n/a	
GPIO	PB12	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	FREQ_HIGH

8.2. DMA configuration

DMA request	Stream	Direction	Priority
LPUART1_TX	DMA1_Channel1	Memory To Peripheral	Low

LPUART1_TX: DMA1_Channel1 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: Enable *

Peripheral Data Width: Byte
Memory Data Width: Byte

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority	
Non maskable interrupt	true	0	0	
Hard fault interrupt	true	0	0	
Memory management fault	true	0	0	
Prefetch fault, memory access fault	true	0	0	
Undefined instruction or illegal state	true	0	0	
System service call via SWI instruction	true	0	0	
Debug monitor	true	0	0	
Pendable request for system service	true	0	0	
System tick timer	true	0	0	
RTC Tamper, RTC TimeStamp, LSECSS and RTC SSRU Interrupts	true	0	0	
DMA1 Channel 1 Interrupt	true	0	0	
LPUART1 Interrupt	true	0	0	
RTC Alarms (A and B) Interrupt	true	0	0	
SUBGHZ Radio Interrupt	true	0	0	
PVD and PVM detector	unused			
FLASH (CFI) global Interrupt	unused			
RCC Interrupt	unused			
ADC Interrupt	unused			

8.3.2. NVIC Code generation


Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	false
RTC Tamper, RTC TimeStamp, LSECSS and RTC SSRU Interrupts	false	true	true
DMA1 Channel 1 Interrupt	false	true	true
LPUART1 Interrupt	false	true	true
RTC Alarms (A and B) Interrupt	false	true	true

Enabled interrupt Table	Select for init	Generate IRQ	Call HAL handler
	sequence ordering	handler	
SUBGHZ Radio Interrupt	false	true	true

^{*} User modified value

9. System Views

- 9.1. Category view
- 9.1.1. Current

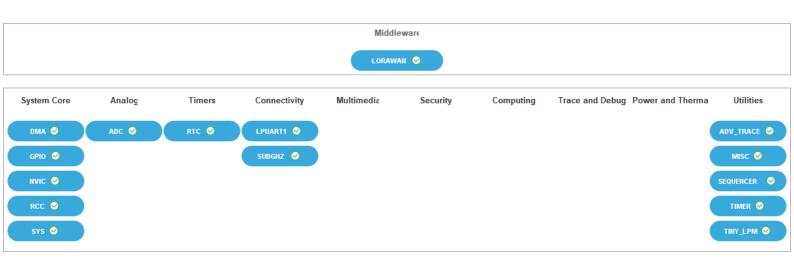

10. Docs & Resources

Type Link

BSDL files https://www.st.com/resource/en/bsdl_model/stm32wl_bsdl.zip

IBIS models https://www.st.com/resource/en/ibis_model/stm32wl_ibis.zip

System View https://www.st.com/resource/en/svd/stm32wl_svd.zip

Description

BSDL files https://www.st.com/resource/en/bsdl_model/stm32wl_bsdl.zip

HW Models https://www.st.com/resource/en/hw_model/stm32wl_reference_board_mb

1720-xo_ios_shield.7z

IBIS models https://www.st.com/resource/en/ibis_model/stm32wl_ibis.zip

System View https://www.st.com/resource/en/svd/stm32wl_svd.zip

Description

Bill of Materials https://www.st.com/resource/en/bill_of_materials/mb1720_bom.zip

Bill of Materials https://www.st.com/resource/en/bill_of_materials/mb1789_hp_bom.zip

Bill of Materials https://www.st.com/resource/en/bill_of_materials/mb1789_lp_bom.zip

Bill of Materials https://www.st.com/resource/en/bill_of_materials/mb1791_bom.zip

Bill of Materials https://www.st.com/resource/en/bill_of_materials/mb1792_bom.zip

Bill of Materials https://www.st.com/resource/en/bill_of_materials/mb1842_bom.zip

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 20_bdp.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 20_manufacturing.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 89_hp_bdp.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 89_hp_manufacturing.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 89_lp_bdp.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 89_lp_manufacturing.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 91_bdp.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 91_manufacturing.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 92_bdp.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb17

Manufacturing 92_manufacturing.zip

Specifications

Board https://www.st.com/resource/en/board manufacturing specification/mb18

Manufacturing 42_bdp.zip

Specifications

Board https://www.st.com/resource/en/board_manufacturing_specification/mb18

Manufacturing 42_manufacturing.zip

Specifications

Schematic Pack https://www.st.com/resource/en/schematic_pack/mb1720_schematics.zip

Schematic Pack https://www.st.com/resource/en/schematic_pack/mb1789_hp_schematic.z

ıр

Schematic Pack https://www.st.com/resource/en/schematic_pack/mb1789_lp_schematic.zi

р

Schematic Pack https://www.st.com/resource/en/schematic_pack/mb1791_schematic.zip

Schematic Pack https://www.st.com/resource/en/schematic_pack/mb1792_schematic.zip

Schematic Pack https://www.st.com/resource/en/schematic_pack/mb1842_schematic.zip

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_embedded_software_solutions.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_eval-

tools_portfolio.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32_stm8_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32-

stm8_software_development_tools.pdf

Presentations https://www.st.com/resource/en/product_presentation/microcontrollers_st

m32wl_series_product_overview.pdf

Presentations https://www.st.com/resource/en/product_presentation/stm32cubemonitor-

wireless-longrange_rftest.pdf

Flyers https://www.st.com/resource/en/flyer/flnucleolrwan.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32wl.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32wbvl.pdf

Application Notes https://www.st.com/resource/en/application_note/an1181-electrostatic-

discharge-sensitivity-measurement-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-

recommendations-and-package-information-for-leadfree-ecopack-mcus-

and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-get-the-

best-adc-accuracy-in-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2867-oscillator-

design-guide-for-stm8afals-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-

waveform-generation-using-the-dac-in-stm32-products-

stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-

used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-stm32-

- crossseries-timer-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4229-how-to-implement-a-vocoder-solution-using-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4894-eepromemulation-techniques-and-software-for-stm32-microcontrollersstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5036-thermal-management-guidelines-for-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5042-precise-hse-frequency-and-startup-time-tuning-for-stm32-wireless-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-usb-typec-power-delivery-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5406-how-to-build-a-lora-application-with-stm32cubewl-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an5407-optimized-rf-board-layout-for-stm32wl-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5408-migrating-from-stm32l0-stm32l1-and-stm32l4-series-associated-with-sx12xx-transceivers-to-stm32wl-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5409-stm32cube-mcu-package-examples-for-stm32wl-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5457-rf-matching-network-design-guide-for-stm32wl-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5480-how-to-build-a-sigfox-application-with-stm32cubewl-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5543-enhanced-methods-to-handle-spi-communication-on-stm32-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5568-ultralowpower-features-of-stm32wl-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5690-vrefbuf-peripheral-applications-and-trimming-technique-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5664-rssi-and-snr-for-lora-modulation-on-stm32wl-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5796-stm32wl-series-rf-bench-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-stm32-microcontrollers-security-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guidefor related Tools freertos-guide-stmicroelectronics.pdf & Software
- Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in

for related Tools _truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog

for related Tools rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard

for related Tools _shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/iar_to_atollic_truestudio

for related Tools __migration_guide-truestudio-for-arm-migration-guide-iar-embedded-

& Software workbench-to-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installatio

for related Tools n_in_truestudio-stm32cubemx-installation-in-truestudio-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-

for related Tools smbuspmbus-embedded-software-expansion-for-stm32cube-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-

for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-

for related Tools hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-

& Software stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-

for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4894-eeprom-

for related Tools emulation-techniques-and-software-for-stm32-microcontrollers-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5042-precise-hse-

for related Tools frequency-and-startup-time-tuning-for-stm32-wireless-mcus-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5054-secure-

for related Tools programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5406-how-to-build-a-

for related Tools lora-application-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5409-stm32cube-for related Tools mcu-package-examples-for-stm32wl-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5426-migrating-

for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5480-how-to-build-a-

for related Tools sigfox-application-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5481-lorawan-at-

for related Tools commands-for-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5544-integration-

for related Tools guide-of-sbsfu-on-stm32cubewl-including-kms-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5554-lorawan-

for related Tools firmware-update-over-the-air-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5566-rf-certification-

for related Tools process-for-nucleowl55jc-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5682-how-to-secure-

& Software

Application Notes https://www.st.com/resource/en/application_note/an5687-longpacket-

for related Tools operation-with-stm32cubewl-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Errata Sheets https://www.st.com/resource/en/errata_sheet/es0506-stm32wle5xx-

stm32wle4xx-device-errata-stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/dm00648230.pdf

Programming https://www.st.com/resource/en/programming manual/pm0214-stm32-

Manuals cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf

Programming https://www.st.com/resource/en/programming_manual/pm0223-stm32-

Manuals cortexm0-mcus-programming-manual-stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference manual/rm0461-stm32wlex-

Manuals advanced-armbased-32bit-mcus-with-subghz-radio-solution-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1163-description-of-

& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-use-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-

& Articles shipping-media-for-stm32-microcontrollers-in-bga-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packagesstmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1208-tape-and-reelshipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-& Articles packages-stmicroelectronics.pdf **Technical Notes** https://www.st.com/resource/en/technical_note/tn1433-reference-device-& Articles marking-schematics-for-stm32-microcontrollers-and-microprocessors-

stmicroelectronics.pdf