

Exercises: Introductory Course on Implicitly Switched ODEs and Filippov Sliding

Andreas Sommer, Lev Gromov, Marvin Hertweck, Pilar Keller

July 09, 2026

Task 1: Introductory Example

Consider the following switched ODE

$$\begin{aligned}\frac{d}{dt}x_1(t) &= \begin{cases} q_1(t), & \text{if } x_1(t) \leq 750 \\ q_1(t) - q_2(t), & \text{if } x_1(t) > 750 \end{cases} \\ \frac{d}{dt}x_2(t) &= \begin{cases} 0, & \text{if } x_1(t) \leq 750 \\ -300, & \text{if } 750 < x_1(t) < 800 \\ 0, & \text{if } x_1(t) \geq 800 \end{cases}\end{aligned}\tag{1}$$

where

$$\begin{aligned}q_1(t) &= \frac{50}{27}t^2 - \frac{100}{3}t + \frac{400}{3} \\ q_2(t) &= (1000 - x_2)(p_1(t - 19) + p_2)\end{aligned}\tag{2}$$

a) **Subtask:**

Use `ode45` to solve this system on the time interval $I = [0, 30]$ with initial conditions $x_1(0) = 0$ and $x_2(0) = 1000$. Use $p = (\frac{3}{4}, \frac{1}{4})$ as the parameter vector.

Plot the solution. Does the solution look correct? Explain why `ode45` produces this result.

Steps:

1. Implement the RHS in the file `rhsTask1.m` as described by eq. (1) and eq. (2). Compute the values of $q_1(t)$ and $q_2(t)$ directly in the RHS as local variables `q1` and `q2` (do not implement them as separate functions).
2. Set the integration time span, initial conditions and parameters in the file `runTask1.m`.
3. Use `ode45` to compute a solution. Remember to pass the RHS as an anonymous function `@(t, y)rhsTaks1(t, y, p)`, which takes a timepoint and state vector and returns the derivative vector. Don't forget to provide the integration time span and initial conditions.
4. Create a vector of timepoints where you will plot the solution using `t = linspace(tspan(1), tspan(end), 1000)`.
5. Evaluate the solution at the timepoints using `y = deval(solution, t)`.
6. Plot the solution using `plot(t, y')`, which will plot both solution components into one plot. Notice that the solution vector must be transposed here with `y'` because the `plot` function plots data column-wise.

b) **Subtask:**

Solve the system from subtask a) again, but this time with a maximum integrator step size of 0.1.

Plot the solution. Does the solution look correct? Explain why `ode45` produces this result.

Steps:

1. Add the maximum step size to the integrator options using `options = odeset(..., 'MaxStep', 0.1)`.
 2. Run your code from subtask a) with the new options.
- c) Now, solve this system using IFDIFF. What changed in comparison to a)? Use the same function header and implementation of the helper functions as mentioned in a)
- d) Let's see how the solution responds to changes in the initial values: Plot the sensitivities of the solution using `plotSensitivities_odexx(sol, @rhsTask1, p, @ode45, options)`. Do they look correct?
- e) Plot the sensitivities of the solution with IFDIFF using `plotSensitivities_ifdiff()`. How do the sensitivities differ from the sensitivities you previously computed in Task 1?

f) Now, compute and plot the sensitivities of this solution. What do you notice?

For reference, your solution and sensitivity plots with IFDIFF should look like the following:

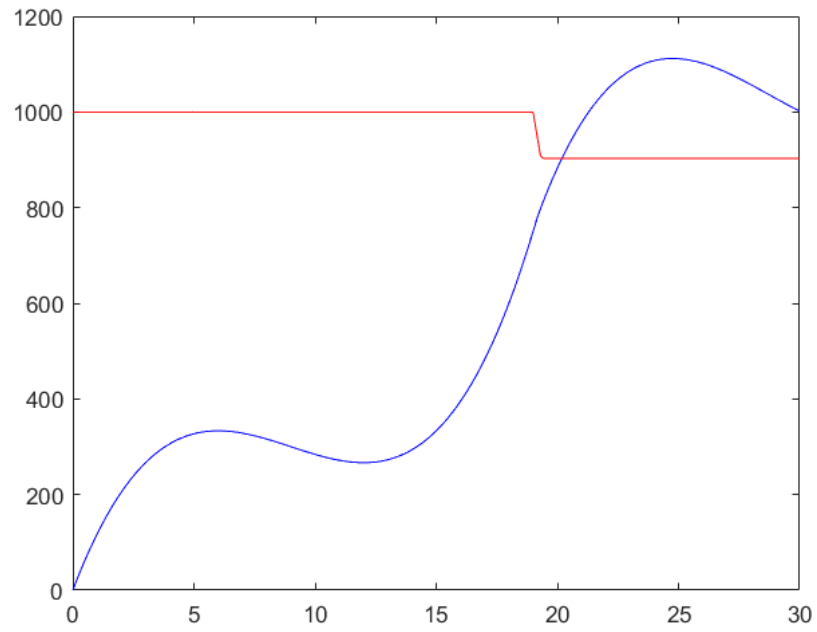


Figure 1: Solution plot for c)

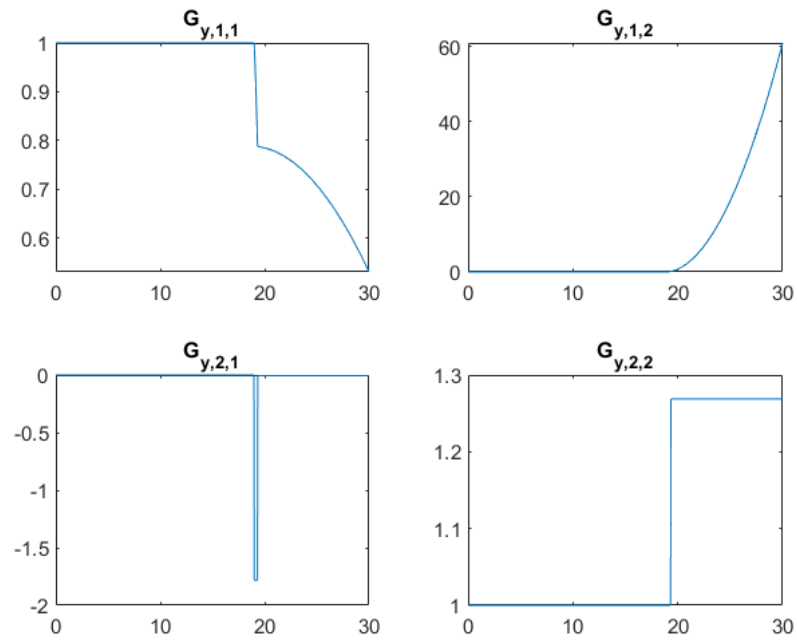


Figure 2: Sensitivities for d)

Appendix B: IFDIFF Cheat Sheet

RHS Function Requirements

- Signature: `function dx = myRHS(t, x, p)`. Keep in mind that the function file also needs to be named `myRHS.m`
- Helper functions work when defined either as:
 - in separate function files
 - as local variables
 - nested functions

but **DO NOT** work as local functions of `myRHS.m` !

- **Warning:** Do not use `elseif` statements, instead use nested `if ... else ... end` statements to code the switching behavior.

IFDIFF Solution Setup: A Canonical Example

We consider the following ODE:

$$\dot{x} = f(t, x, p) = \begin{pmatrix} f_1(t, x, p) \\ f_2(t, x, p) \end{pmatrix}$$
$$f_1(t, x, p) = 0.01 \cdot t^2 + x_2^3 \quad f_2(t, x, p) = \begin{cases} 0 & \text{if } x_1 < p \\ 5 & \text{if } p \leq x_1 < p + 0.5 \\ 0 & \text{if } x_1 \geq p + 0.5 \end{cases}$$

with the initial value $x(0) = (0, 1)^T$ and parameter $p = 5.437$

1. Setup the the RHS and name the file `canonicalExampleRHS.m`

```
function dx = canonicalExampleRHS(t,x,p)

dx = zeros(2,1);
dx(1) = 0.01 * t.^2 + x(2).^3;
if x(1) < p(1)
dx(2) = 0;
else
if x(1) < p(1) + 0.5
dx(2) = 5;
else
dx(2) = 0;
end
end

end
```

2. **Main Script:** Setup the initial values, the time interval as well as parameter(s):

```
t0 = 0;
tf = 20;
timeinterval = [t0,tf];
initstates   = [1 0];
p            = 5.437;
```

3. Define options in the main script and call `prepareDatahandleForIntegration` to prepare the right-hand side with the options for IFDIFF:

```
integrator = @ode45;
odeoptions = odeset( 'AbsTol', 1e-10, 'RelTol', 1e-5);
filename = 'canonicalExampleRHS';
datahandle = prepareDatahandleForIntegration(filename, 'integrator',
    integrator, 'options', odeoptions);
```

4. Create a solution structure using `solveODE` and evaluate

```
T = t0:0.1:tf;
sol_ifdiff = solveODE(datahandle, timeinterval, initstates, p);
Y_ifdiff = deval(sol_ifdiff, T);
```

5. Plot the solution

```
plot(T, Y_ifdiff);
xlabel('Time (s)');
ylabel('State Variables');
title('IFDIFF Solution');
grid on;
```

6. Compute and plot the sensitivities. There are two methods to do so. For the first one, you need to use `generateFDstep` so get finite differences and then use `generateSensitivityFunction` (which uses the VDE method in this example) to compute the sensitivities. Afterward, you can access and plot the sensitivities by appropriately reshaping the matrices in the `sensitivities` struct array, which are stored in the fields `Gy` for sensitivities w.r.t. initial values and `Gp` for sensitivities w.r.t. parameters respectively.

```
%% Step 5: Compute sensitivities manually

dim_y = size(Y_ifdiff, 1);
dim_p = length(p); % dim_p = 1

FDstep = generateFDstep(dim_y, dim_p, 'hy_rel_flag', true, 'hp_rel_flag', true, 'hy_min', 1e-6, 'hp_min', 1e-6);
sensFun = generateSensitivityFunction(datahandle, sol_ifdiff, FDstep, 'method', 'VDE', 'integrator_options', options);

sensitivities = sensFun(T); % Compute sensitivities at time points in T
```

Alternatively, you may use the provided `plotSensitivities_ifdiff` function which already computes the sensitivities internally and just outputs a plot:

```
plotSensitivities_ifdiff(datahandle, sol_ifdiff, p);
```

Your plots should look like the following:

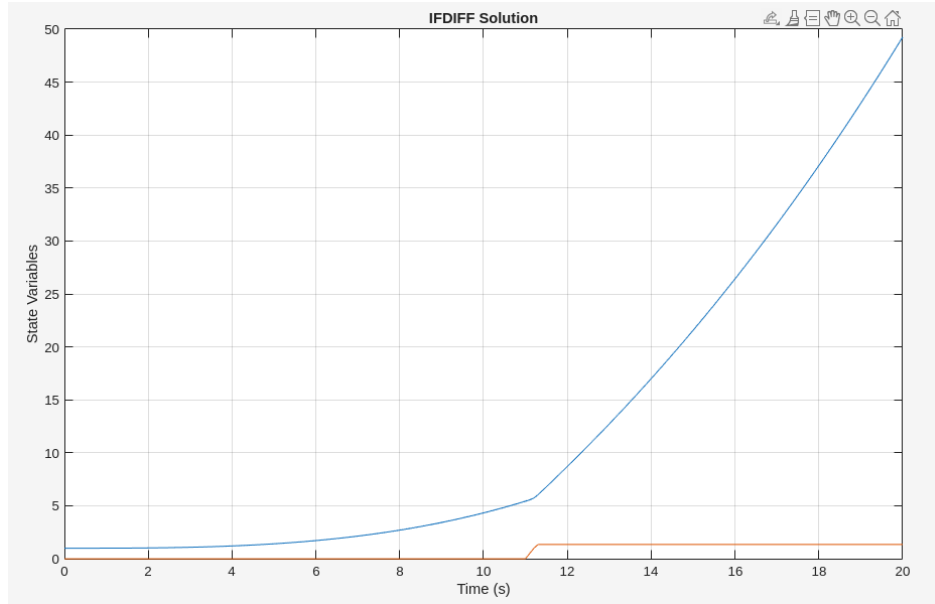


Figure 3: Canonical Example solution with IFDIFF

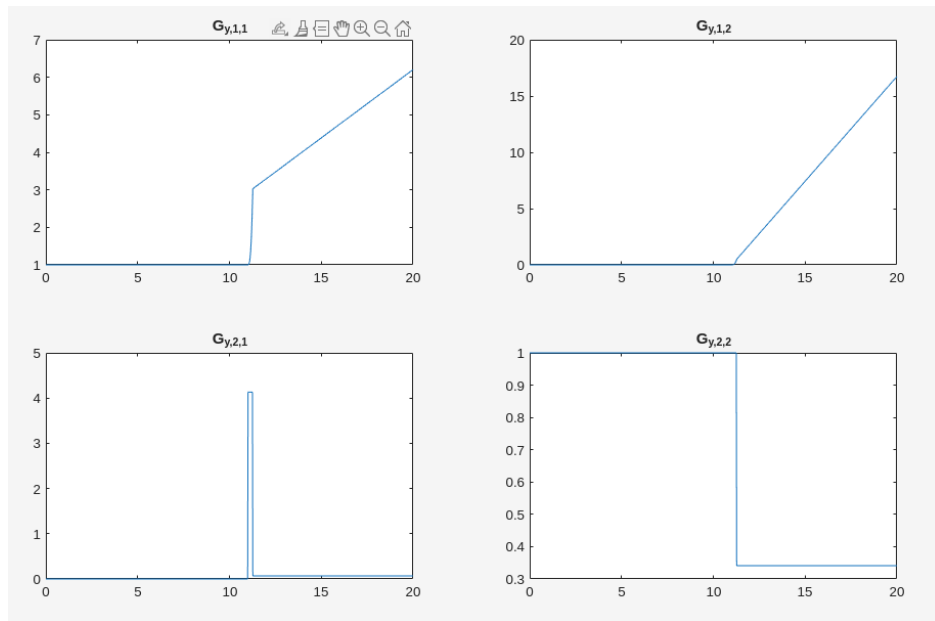


Figure 4: Sensitivities for the Canonical Example with IFDIFF

Specifying state jumps in a RHS

A state jump may be specified at any point in the RHS via a special if-block:

```
function dx = myRHS(t, x, p)
...
if ifdiff_jumpif(jumpCondition, jumpDirection)
... <statements computing the jumpIncrement> ...
endifdiff_update(jumpIncrement)
end
...
end
```

When the first argument of the `ifdiff_jumpif` function (`jumpCondition`) crosses zero in the direction specified by the second argument (`jumpDirection`), i.e. negative to positive (1), positive to negative (-1) or both (0), IFDIFF will increment the state vector in the solution by the first argument of the `ifdiff_update` function (`jumpIncrement`).

Warning: The state vector and `jumpIncrement` must have matching dimensions. In particular, the `jumpIncrement` must be a column-vector with the same number of elements as the state vector.

Warning: IFDIFF will never execute the body of the if-block directly in the RHS, so make sure that the statements in the if-block are only used to compute the `jumpIncrement`. In particular, any variables exclusively defined in the if-block must not be used outside of the if-block.

Plotting state jump sensitivities

Solve the system, compute the sensitivities and then call the `plotSensitivitiesSwitched` function.

Here is an example:

```
% RHS params
tspan = [0, 10];
h0 = 0;
v0 = 10;
x0 = [h0; v0];
p = 9.8;
% Solver params
solver = @ode45;
options = odeset('AbsTol', 1e-8, 'RelTol', 1e-6);
% Call IFDIFF
dh = prepareDatahandleForIntegration(@bounceRHS, 'integrator', solver, 'options', options);
sol = solveODE(dh, tspan, x0, p);

dim_y = size(sol.y, 1);
dim_p = length(p);
FDstep = generateFDstep(dim_y, dim_p);
sensFun = generateSensitivityFunction(dh, sol, FDstep, 'method', 'VDE');

plotSensitivitiesSwitched(sol, sensFun, tspan);
```