
Execution graph: a graph on instructions

1. Instructions (nodes): Load, Store, Branch_x, Other_x (potential transmitters); Branch_n, Other_n (non-transmitters). Operands inreg, inaddr, inmem, outreg, outmem name Reg (r_i) or Mem (m_i) state.
2. Annotations (per-instruction Booleans): resolved r; committed c (implies r; a prefix of spo); target transmitter t (exactly one).
3. Relations (edges): spo, total program order (top to bottom); rf ⟶, reads-from, output to input operand of a later instruction (same state); ddi ⇢, input to output operand within one instruction.

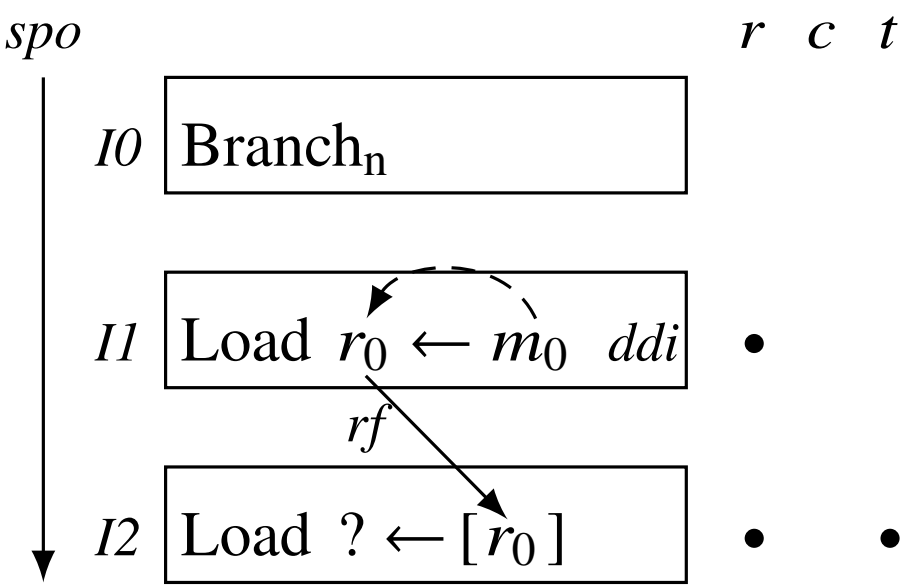

Example: I1 loads m_0 into r_0 (ddi); I2 reads r_0 as its address (rf). I0 is unresolved, I1 and I2 are resolved, nothing is committed, and I2 is the target transmitter. ? = output left unspecified.