RELAY MODULE PC BOARD

- 3.3-5v input to B1 IN & GND
- Vcc for relay 3.3-5v @ 110mA
- Red LED input monitor
- Module can run w/ common input power
  - leave jumpers J1, J2 in place
- For isolated input vs relay power
  - remove J2 to isolate GNDs
  - (?) remove J1 to move Vcc away from IN terminal?

INPUT - B1 IN & B1 GND

RELAY POWER - Vcc to J1B, gnd to J2B

J1A, J2A not used

Q1 driver transistor for relay coil

Q2 PC817C opto isolator 3.3-5v 2mA input. 80v 50mA output

D1 Red LED input indicator

D2 relay coil flyback protector for Q1

R1 101 100Ω input current limit resistor

R2 102 1KΩ base resistor

RELAY SRD-03VDC-SL-C 10A 125-250VAC 30VDC SPDT
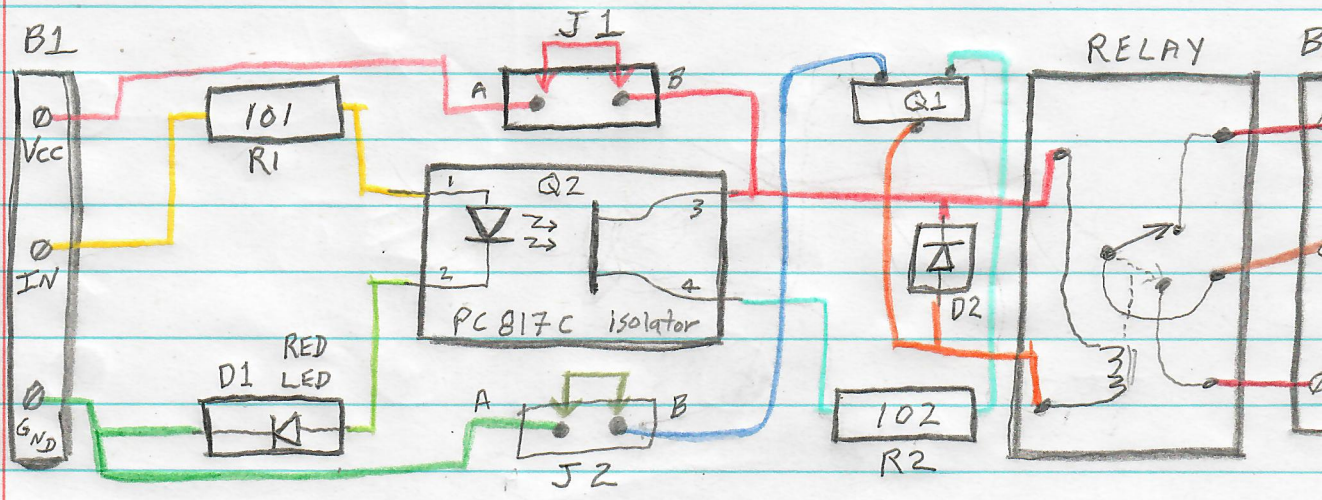
coil 110mA @ 3.3-5v