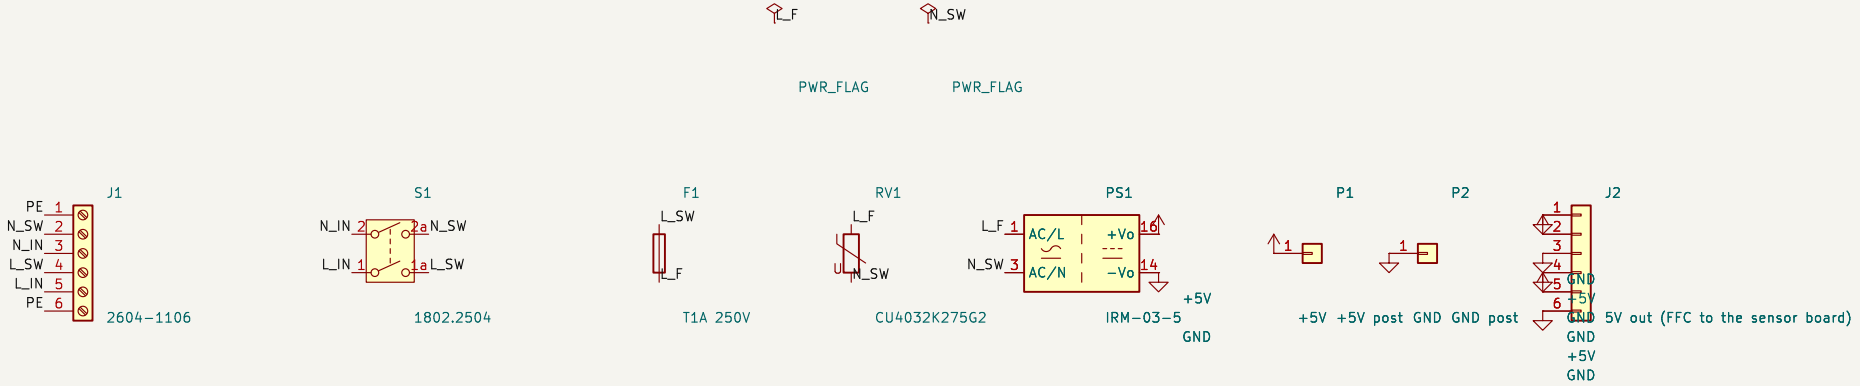


Mains board for the smart wall plate (docs/DESIGN.md D-24, D-25; pcb/README.md).
J1 takes the house wiring: L, N, PE in and switched L, N, PE out to the load.
S1 (Marquardt 1802.2504) switches line and neutral; the PSU is fed after the switch through F1.
J2: 5 V to the sensor board over a 6-way 0.5 mm FFC (D-50). P1 / P2: spacer posts (+5V, GND) for the pin board with the battery-free remote's spring pins (D-50, D-59).
F1 rating T1A is a designer's choice (Mean Well gives none): HUMAN REVIEW. F1 breaking capacity 200 A.
Spacing targets (not a compliance claim): L-N, L in-L sw, N in-N sw, mains-PE >= 3.5 mm; mains-5 V >= 8.0 mm with a routed slot under PS1. Enforced by na_mains_board.kicad_dru.
PS1 pinout per https://www.meanwell.com/Upload/PDF/IRM-03/IRM-03-SPEC.PDF: 1=AC/L, 3=AC/N, 14=-Vo, 16=+Vo, 5=NC.

Generated by pcb/na/tools/gen_schematic_na.py - edit parts_na.py
Spacing values are design targets - human review before fab.
smart-wallplate

Sheet: /
File: na_mains_board.kicad_sch

Title: Sladdseg - NA mains board

Size: A4	Date: 2026-10-12	**Rev: v0.6**
KiCad E.D.A. 9.0.9		Id: 1/1