

USB_C ADVANCED POWER SUPPLY 5/10/12/20/28V

USB_C Connector

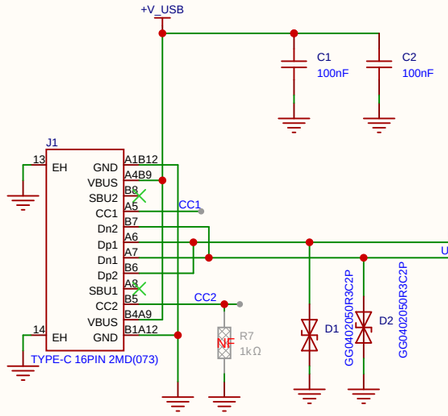


NOTE: For requests above 20 V or above 60 W (3 A), use a USB-C cable with an eMarker chip (rated 5 A).

USB PD Controller

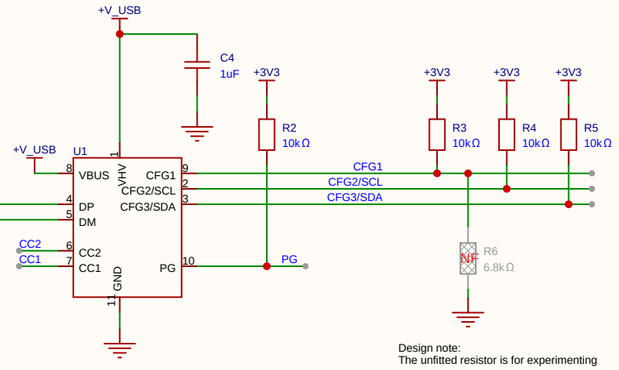


Design note:
The unfitted resistor is for experimenting

error LED

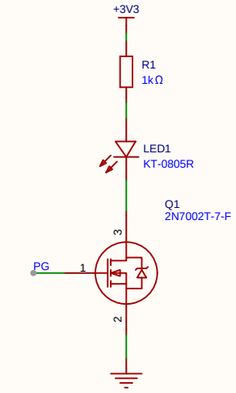


Output Connector




Important!
The maximum Output voltage and current depends on power adapter, cable,and selected voltage

3V3 Power

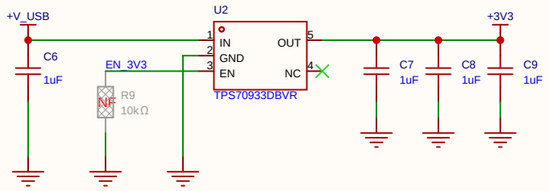


Output voltage selection switches




CFG1	CFG2	CFG3	OutputVoltage
1	X	X	5V
0	0	0	9V
0	0	1	12V
0	1	1	20V
0	1	0	28V


Voltage LED Indicator

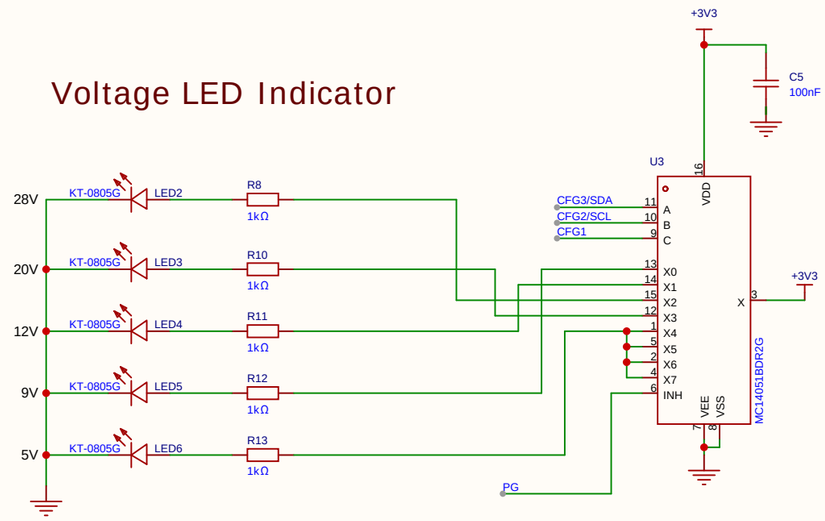

I2C Header



Mounting Hole



Schematic	Schematic	Create at	2026-10-15
		Update at	2026-10-17
Board	Board1	Page	USB _C Advanced power supply
Drawn		USB _C Advanced power supply	
Reviewed			
		Version	Size / Page 1 Total 1
EasyEDA		V1.0	A4 / Bangura