



UNIVERSITY
OF WOLLONGONG
AUSTRALIA

University of Wollongong
Research Online

Faculty of Engineering - Papers (Archive)

Faculty of Engineering and Information Sciences

2009

Control of autonomous airship

Yiwei Liu

University of Wollongong, yl359@uow.edu.au

Zengxi Pan

University of Wollongong, zengxi@uow.edu.au

David A. Stirling

University of Wollongong, stirring@uow.edu.au

Fazel Naghdy

University of Wollongong, fazel@uow.edu.au

<http://ro.uow.edu.au/engpapers/607>

Publication Details

Liu, Y., Pan, Z., Stirling, D. A. & Naghdy, F. 2009, 'Control of autonomous airship', Proceedings of the 2009 IEEE International Conference on Robotics and Biomimetics, IEEE, Guilin, China, pp. 2457-2462.

Research Online is the open access institutional repository for the University of Wollongong. For further information contact the UOW Library:
research-pubs@uow.edu.au

Control of Autonomous Airship

Yiwei Liu Student member IEEE, Zengxi Pan, David Stirling and Fazel Naghdy

Abstract—Scientific research and development on the control of autonomous airship have shown a significant growth in recent years. New applications appear in the areas such as freight carrier, advertising, monitoring, surveillance, transportation, military and scientific research. The control of Autonomous airship is a very important problem for the aerial robots research. In this paper, the previous research on the control of autonomous blimp is reviewed, Several popular control methods are categorized and discussed in detail. Then an intelligent navigation control method, reinforcement learning control, is introduced in the autonomous blimp which was used for 2007 UAV Outback Challenge. The future work on intelligent airship control is also outlined.

I. INTRODUCTION

An autonomous airship is an unmanned aerial robotic platform possessing six or more variable-function control inputs. These inputs are actuated in many combinations seeking to attain, a mission prescribed, series of task goals, some or all of which may be challenged by significant stochastic environmental disturbances. Blimp is a special type of airship without grid structure on the body. Most existing airships are manually operated by a pilot directly or through radio control. One of the most famous examples is the Goodyear Blimp used for commercial advertising. With the fast development of microcontroller and electronic technologies, autonomous airships have recently attracted great research interest as a platform to reach dangerous or difficulty-to-access environment in applications such as disaster exploration and rescue, security surveillance in public events and climate monitoring, etc.

The purpose of this review paper is to show a compendium of recent approach to airship autonomous control in the context of the aerial robotic research in order to highlight the potential advantages of intelligent control methods. It is an efficient way to analyze and improve the autonomous control in the aerial robots research.

The paper is organized as follows. Firstly, a description of potential applications and needs of autonomous airship are presented. Section II outlines the basic configuration for control tasks in autonomous airship application. Section III describes in the control methods used for autonomous airship. Section IV provides the more detail on intelligent control of blimp navigation, and section V concludes this paper and points out the future work.

Yiwei L., David S. and Fazel N. are with School of Electrical, Computer and Telecommunication Engineering, University of Wollongong, NSW, Australia {y1359, stirring, fazel}@uow.edu.au
Zengxi P. is with Faculty of Engineering, University of Wollongong, NSW, Australia zengxi@uow.edu.au

A. Potential applications of autonomous airship

The autonomously control of the airship is a challenging job, especially in the outdoor environment under the various disturbance and uncertainties. Autonomous airship was developed with different control methods in various environments. The potential applications of autonomous airship are categorized in Table I.

TABLE I
POTENTIAL APPLICATION OF AUTONOMOUS AIRSHIP

Industrial Areas	Application Example
Environment	• Greenhouse gas emission detecting and climate change monitoring.
Disaster Rescue	• Monitoring and rescue services in inaccessible environment.
Infrastructure	• Working platform for spiderman.
Astro Exploration	• Monitoring and service for planet exploration.
Transportation	• Big carriages and low costs for the long distance transports.
Telecommunication	• Relaying the communication signals in remote areas.
Military Operation	• Monitoring and weapon platform in tactics tasks.
Security	• Mobile monitoring guard and anti-terror attack.
Science and Research	• Astro and environmental research.

B. Needs for autonomous airship

The history of airship starts in 1852 when Henri Giffard built the first powered airship. A non-rigid airship, or blimp, differs from a rigid airship(Zeppelin airship) in that it does not have a rigid structure that holds the airbag in shape. Autonomous airship has many benefits compared to other Unmanned Aerial Vehicles(UAVs), such as winged planes and helicopters. It does not require any motor action to maintain a certain altitude and position in the space as it relies on low density gas inside the envelope to balance its own weight. With this feature, airship could conduct a continuous aerial operation with very low energy consumption. Advantages of airship made over the last two decades in upgrading the first human practical air vehicle, have been rather overshadowed by space programs, satellites orbiting the earth, jet mass transport, and supersonic aircrafts. More recently they have received special attention for environmental applications such as research in bio-diversity, ecology, climatology, and agriculture

From the beginning of this century, researchers at university and corporations have been working on principles

TABLE II
SUMMARY OF EXISTING RESEARCH OF AUTONOMOUS AIRSHIP

Name/Maker	Time	Experimental Airship	Main Research Achievements	Reference
Autonomous Institute of CTI Campinas, Brazil	1998-2003	AURORA Airship	<ul style="list-style-type: none"> Environmental monitoring missions. Airship dynamic model. Optimal visual servoed guidance. Internet-based solution in airship control. 	[23],[1],[12],[24]
University of Pennsylvania USA	1998-2003	GRASP Blimp	<ul style="list-style-type: none"> Computer vision-based navigation. Motion Planning. 	[10],[11],[25],[3]
LAAS/CNRS France	2002-2003	Robot Karma	<ul style="list-style-type: none"> Backstepping control methods. Terrain mapping. 	[17],[26],[27],[28]
Kyoto University Japan	2003-2005	Indoor Blimp	<ul style="list-style-type: none"> Image-based tracking control. Inverse optimal tracking control. 	[14], [29],[19]
Technical University of Lisbon, Portugal	2005-2008	AURORA Airship	<ul style="list-style-type: none"> Robust control. Hovering motion control. 	[20], [9]
Evry Val d'Essonne University, France	2005-2006	LSC Airship	<ul style="list-style-type: none"> Characterization of non trim trajectories. Calculation of the trim trajectories. 	[30], [8]
Hokkaido University Japan	2006	Balloon Robot	<ul style="list-style-type: none"> Motion control. 	[7], [31]
University of Tokyo	2006-2007	Indoor Blimp	<ul style="list-style-type: none"> Model predictive control. 	[21],[32], [33]
NASA JPL USA	2003-2008	Planet Blimp	<ul style="list-style-type: none"> Optimal aerobot trajectory planning. Human robot Lunar exploration. 	[4], [34]

for incorporating the physical parameters of a mechanical system into the image plane for performing visual servoing. It is noted that under suitable conditions, namely the existence of a diffeomorphism between image features and robot pose, many tools from mechanical system control theory can be used directly when applied in the image plane. This image navigating idea was improved by Jonathan Ko[15]. He predicted the next possible movement positions for the autonomous airship based on the image monitoring system.

In 2002 and 2003, Silveira, G. F.[12] and Yasunori Kawai[13] adopted vision analysis in their airship research to acquire the position information and provide flying motion instructions from the image processing.

Fig.3 shows the main structure of this blimp control system.

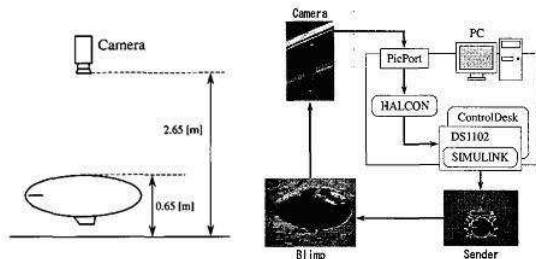


Fig. 3. Unmanned blimp control system built by Yasunori Kawai [13].

With a similar idea, Takanori Fukao[14] implemented the image-based tracking control algorithm to account for the navigation task in his research.

In 2007, Niko Suinderhauf[16] and his research group used the Simultaneous Localization And Mapping (SLAM) technology to deal with the navigation tasks for the autonomous airship. In this research, the simultaneous location information was collected by the visual system on board

and then was transferred to the airship control system. Fig.4 shows their airship control system.

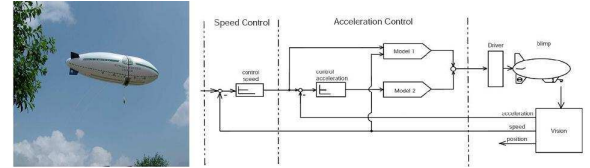


Fig. 4. Airship navigation system used the SLAM [16].

III. CONTROL METHODS IMPLEMENTED ON AUTONOMOUS AIRSHIP

Compared to the manned or semi-manned airship, autonomous airship control involves providing independent and accurate flight operations with little human intervention. The control methods implemented on autonomous airship lie in two categories, traditional control methods and advanced control methods. The traditional control methods achieve autonomous control goals via classical control algorithms, such as the PID control theorem. These control methods have the advantages of being easily implemented and providing reliable control performance, while the weaknesses include the costs of computation to model the system and tuning the control parameters. Advanced control methods are becoming more popular for blimp autonomous control, as these control methods are mainly developed to improve the control performance of autonomous airship in a complex and unstable flight environment.

A. Traditional control methods

Main challenges of traditional control methods are to acquire the dynamic model of the airship precisely in a changing environment and to responsibly modify the PID

parameters under this condition. For a specific control application, PID control can combine with other advanced technology to realize airship autonomous control. Jose R. Azinheira[2] presented a PD control problems of automatic hovering of an outdoor autonomous airship using image-based visual servoing. The hovering controller was designed using a full dynamic model of the airship, in a PD error feedback scheme, taking the visual signals extracted from an on-board camera as output. This PD control approach was validated in simulation by using an accurate airship model.

In [7], Toshihiko Takaya and his group implemented a PID control on blimp landing control. They developed a method of landing with orbital control of the charge point that gives autonomy to a blimp robot. This landing motion is used to provide an autonomous battery charge that allows blimp autonomous operation for a long time. The performance of PID control in this application is good enough for the blimp to achieve certain space orbit points. From this application, it is easy to see that PID control can be efficiently used in an indoor environment.

B. Advanced control methods

Most of these applications are faced with highly nonlinear and time-varying control systems, in which it is difficulty to obtain an accurate dynamic model of the blimp and environment. Several advanced control methods have been developed, such as back stepping control, robust control, model-prediction control, and other intelligent control methods.

Alexandra Moutinho[20](2005) used the dynamic inversion to realize robust control method in their autonomous airship of the AURORA project. A Dynamic Inversion controller was implemented with desired dynamics given by a linear optimal compensator. The stability analysis of the nonlinear system is done applying Lyapunov's stability theory. Robustness tests were performed in this research in order to verify the nonlinear controller performance in the face of disturbances and model parameters errors. The results obtained illustrate the overall system robustness, and point at the most sensitive model parameters of the AURORA airship, for which a more careful identification and determination should be carried. Fig.5 shows the AURORA airship and its robust control system structure.

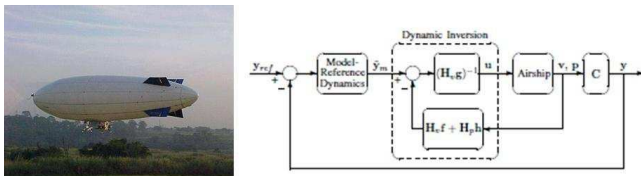


Fig. 5. AURORA airship and its robust control system structure [19].

Takanori Fukao[19] implemented inverse optimal tracking control to improve the robustness of an autonomous airship control system. These robust control methods provided the higher flight stability to the airship. In all of these advanced control methods, the backstepping control and model-

prediction control are two efficient and well discussed control algorithms.

1) *Backstepping control*: Lotfi Beji[18] (2002) and his group research the control strategy combined averaging and backstepping approach to design a time-varying stabilization of the position and orientation of an under-actuated autonomous airship. In their research, the stabilization problem was addressed through a detailed analysis of the blimp dynamic model. The stabilizing feedback law was proved and the averaging and backstepping approach were implemented. At the same time, Emmanuel Hygounenc[17] ran the LAAS-CNRS project of autonomous blimp robot development. In this research, they deal with autonomous airship control in the case of very low perturbations. For each phase a reduced model is determined and a controller is designed on the basis of backstepping techniques. This approach allowed one to consider the kinematic and dynamic requirements separately. Fig.6 shows their autonomous airship (Robot Karma) which had been developed in LAAS-CNRS project 2002-2003.



Fig. 6. Robot Karma in LAAS-CNRS project 2002-2003 [18].

In 2008, Jos Raul Azinheira[9] used backstepping control methods to control the hovering motion in his autonomous blimp research, which showed good performance in motion control tasks.

2) *Model-predictive control*: Model-predictive control has been combined with dynamic model analysis for airship control problems. Hiroaki Fukushima[21] and his group developed an autonomous blimp control system via model-predictive control in 2006. They investigated the applicability of model predictive control to mechanical systems based on experimental examples of multi-vehicle formation and autonomous blimp control.

In 2007, Jonathan Ko [15] presented a new type of model-predictive control which was related to the Gaussian Processing and Reinforcement learning technology. In his autonomous blimp application, whole movements of the autonomous blimp were monitored by a visual measurement system in the laboratory. Based on this movement information, the research was able to identify the airship dynamic model in the flight and then predict the next the most probable position to guide airship to the goal position. His research obtained better performance for an autonomous airship control system. Fig.7 shows the experimental environment and the actuators of this airship control system.

IV. REINFORCEMENT LEARNING CONTROL OF AUTONOMOUS BLIMP NAVIGATION

Intelligent control, as a certain new trail, is also transferred to the autonomous airship control applications from the



Fig. 7. The left image shows the blimp used in test environment equipped with a motion capture system. It has a customized gondola (right images) that includes an X Scale based computer with sensors, two ducted fans that can be rotated by 360 degrees, and a webcam [15].

modern robotics researches[22]. Reinforcement learning is one certain intelligent learning technology, which can help facilitate an easier design process for autonomous control system, and reduces human intervention as much as possible in airship flights. The blimp controlled by a reinforcement learning algorithm is used as the testing platform for "2007 UAV Outback Challenge" organized by Australian Research Center for Aerospace Automation (ARCAA). The destination of this blimp control system is to achieve autonomous navigation without a blimp model.

The autonomous control system for the blimp navigation contains two major parts. The first part is the on-board controller attached on the gondola of the blimp. An AVR microcontroller is used as the main control unit (MCU). Other peripheral equipment includes a wireless sensor connection, a servo to control the pitch and thrust of the blimp, three DC motors, and several sensors. All of these devices are working for collecting and sending data to the MCU, and executing the commands from the microcontroller. Fig.8 shows the whole structure of the blimp control system. From this figure, it is easy to see that main design of this control system is the machine learning parts which can help blimp have the learning ability like the human being.

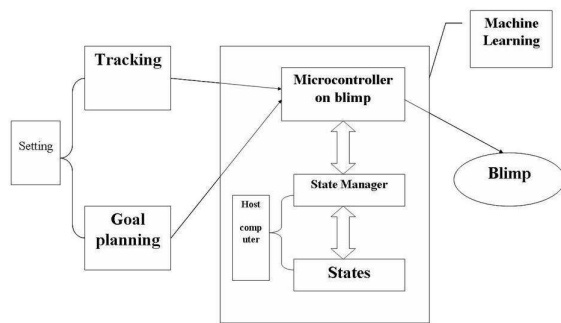


Fig. 8. Learning control system of the autonomous blimp.

Hardware structure of this control system in practical has been developed according to above control structure block diagram. The components of each part were chosen according to the consideration of capability, reliability, and economy. Fig.9 provides detail of the hardware design on this autonomous blimp control system. It can be obviously found that whole system is divided by two main executive parts, which are both ground station and onboard unit. On

the onboard unit, one effective microcontroller is designed to manage the communication with the ground station via Zigbee devices, and control over all actuators on the blimp, such as GPS, measurement sensors, DC motor for propellers and power for this onboard system. The small size electrical circuit board is developed, and tests all onboard components separately.

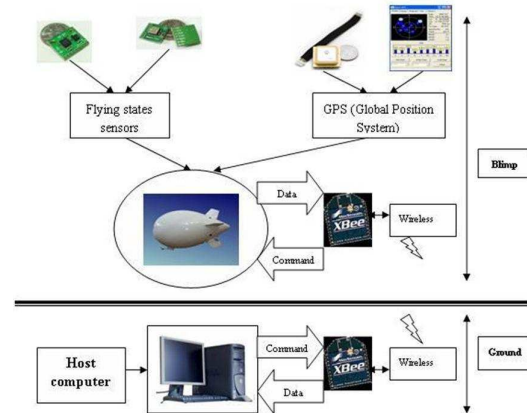


Fig. 9. Hardware for autonomous control system.

V. CONCLUSION AND FUTURE WORK

After more than one decade of research efforts by many researchers from different countries, autonomous airships are increasingly treated as a high level automation platform for various applications. Newer technologies, such as new materials, high speed computation, more accurate sensing technology, and more advanced control methods, drive the autonomous airship to be as independent and reliable as possible. Currently the development of intelligent control for autonomous airship is still at laboratory stage. Several technical requirements, such as a more precise dynamic model, microcontroller with higher performance computation, and accurate sensing, still not satisfied. With the technological progress in these areas, commercial smart control airship will appear in the near future.

REFERENCES

- [1] Gomes, S.B.V.; Ramos, J.G., Jr., "Airship dynamic modeling for autonomous operation," *Robotics and Automation, 1998. Proceedings. 1998 IEEE International Conference on*, vol.4, no., pp.3462-3467 vol.4, 16-20 May 1998
- [2] Azinheira, J.R.; Rives, P.; Carvalho, J.R.H.; Silveira, G.F.; de Paiva, E.C.; Bueno, S.S., "Visual servo control for the hovering of all outdoor robotic airship," *Robotics and Automation, 2002. Proceedings. ICRA '02. IEEE International Conference on*, vol.3, no., pp.2787-2792, 2002
- [3] Jongwoo Kim; Ostrowski, J.P., "Motion planning a aerial robot using rapidly-exploring random trees with dynamic constraints," *Robotics and Automation, 2003. Proceedings. ICRA '03. IEEE International Conference on*, vol.2, no., pp. 2200-2205 vol.2, 14-19 Sept. 2003
- [4] Kampke, T.; Elfes, A., "Optimal aerobot trajectory planning for wind-based opportunistic flight control," *Intelligent Robots and Systems, 2003. (IROS 2003). Proceedings. 2003 IEEE/RSJ International Conference on*, vol.1, no., pp. 67-74 vol.1, 27-31 Oct. 2003

- [5] Kampke, T.; Elfes, A., "Optimal wind-assisted flight planning for planetary aerobots," *Robotics and Automation, 2004. Proceedings. ICRA '04. 2004 IEEE International Conference on*, vol.3, no., pp. 2542-2549 Vol.3, 26 April-1 May 2004
- [6] Bicho, E.; Moreira, A.; Carvalheira, M.; Erhagen, W., "Autonomous flight trajectory generation via attractor dynamics," *Intelligent Robots and Systems, 2005. (IROS 2005). 2005 IEEE/RSJ International Conference on*, vol., no., pp. 1379-1385, 2-6 Aug. 2005
- [7] Takaya, Toshihiko, Kawamura, Hidenori, Minagawa, Yoshihiro, Yamamoto, Masahito, Ohuchi, and Azuma, "Pid landing orbit motion controller for an indoor blimp robot," *Artificial Life and Robotics*, vol. 11, no. 2, p. 227, July 2007
- [8] Salim Hima; Yasmina Bestaoui, "Trim Trajectories Characterization for an Unmanned Autonomous Airship," *Intelligent Robots and Systems, 2006 IEEE/RSJ International Conference on*, vol., no., pp.137-142, Oct. 2006
- [9] Azinheira, J.R.; Moutinho, A., "Hover Control of an UAV With Backstepping Design Including Input Saturations," *Control Systems Technology, IEEE Transactions on*, vol.16, no.3, pp.517-526, May 2008
- [10] De Coelho, L.S.; Campos, M.F.M.; Kumar, V., "Computer vision-based navigation for autonomous blimps," *Computer Graphics, Image Processing, and Vision, 1998. Proceedings. SIBGRAPI '98. International Symposium on*, vol., no., pp.287-294, 20-23 Oct 1998
- [11] Hong Zhang; Ostrowski, J.P., "Visual servoing with dynamics: control of an unmanned blimp," *Robotics and Automation, 1999. Proceedings. 1999 IEEE International Conference on*, vol.1, no., pp.618-623 vol.1, 1999
- [12] Silveira, G.F.; Carvalho, J.R.H.; Rives, P.; Azinheira, J.R.; Bueno, S.S.; Madrid, M.K., "Optimal visual servoed guidance of outdoor autonomous robotic airships," *American Control Conference, 2002. Proceedings of the 2002*, vol.1, no., pp. 779-784 vol.1, 2002
- [13] Kawai, Y.; Kitagawa, S.; Izoe, S.; Fujita, M., "An unmanned planar blimp on visual feedback control: experimental results," *SICE 2003 Annual Conference*, vol.2, no., pp. 2217-2222 Vol.2, 4-6 Aug. 2003
- [14] Fukao, T.; Fujitani, K.; Kanade, T., "Image-based tracking control of a blimp," *Decision and Control, 2003. Proceedings. 42nd IEEE Conference on*, vol.5, no., pp. 5414-5419 Vol.5, 9-12 Dec. 2003
- [15] Ko, J.; Klein, D.J.; Fox, D.; Hahnel, D., "Gaussian Processes and Reinforcement Learning for Identification and Control of an Autonomous Blimp," *Robotics and Automation, 2007 IEEE International Conference on*, vol., no., pp.742-747, 10-14 April 2007
- [16] Sunderhauf, N.; Lange, S.; Protzel, P., "Using the Unscented Kalman Filter in Mono-SLAM with Inverse Depth Parameterization for Autonomous Airship Control," *Safety, Security and Rescue Robotics, 2007. SSR 2007. IEEE International Workshop on*, vol., no., pp.1-6, 27-29 Sept. 2007
- [17] Hygounenc, E.; Soueres, P., "Automatic airship control involving backstepping techniques," *Systems, Man and Cybernetics, 2002 IEEE International Conference on*, vol.6, no., pp. 6 pp. vol.6-, 6-9 Oct. 2002
- [18] Beji, L.; Abichou, A.; Bestaoui, Y., "Stabilization of a nonlinear underactuated autonomous airship-a combined averaging and backstepping approach," *Robot Motion and Control, 2002. RoMoCo '02. Proceedings of the Third International Workshop on*, vol., no., pp. 223-229, 9-11 Nov. 2002
- [19] Fukao, T.; Kanzawa, T.; Osuka, K., "Inverse optimal tracking control of an aerial blimp robot," *Robot Motion and Control, 2005. RoMoCo '05. Proceedings of the Fifth International Workshop on*, vol., no., pp. 193-198, 23-25 June 2005
- [20] Moutinho, A.; Azinheira, J.R., "Stability and Robustness Analysis of the AURORA Airship Control System using Dynamic Inversion," *Robotics and Automation, 2005. ICRA 2005. Proceedings of the 2005 IEEE International Conference on*, vol., no., pp. 2265-2270, 18-22 April 2005
- [21] Hiroaki Fukushima; Ryosuke Saito; Fumitoshi Matsuno; Yasushi Hada; Kuniaki Kawabata; Hajime Asama, "Model predictive control of an autonomous blimp with input and output constraints," *Computer Aided Control System Design, 2006 IEEE International Conference on Control Applications, 2006 IEEE International Symposium on Intelligent Control, 2006 IEEE*, vol., no., pp.2184-2189, 4-6 Oct. 2006
- [22] Chang-Su Park; Hyunjae Lee; Min-Jea Tahk; Hyochong Bang, "Airship control using neural network augmented model inversion," *Control Applications, 2003. CCA 2003. Proceedings of 2003 IEEE Conference on*, vol.1, no., pp. 558-563 vol.1, 23-25 June 2003
- [23] Elfes, A.; Siqueira Bueno, S.; Bergerman, M.; Ramos, J.G., Jr., "A semi-autonomous robotic airship for environmental monitoring missions," *Robotics and Automation, 1998. Proceedings. 1998 IEEE International Conference on*, vol.4, no., pp.3449-3455 vol.4, 16-20 May 1998
- [24] Ramos, J.J.G.; Maeta, S.M.; Mirisola, L.G.B.; Bueno, S.S.; Bergerman, M.; Faria, B.G.; Pinto, G.E.M.; Bruciapaglia, A.H., "Internet-based solutions in the development and operation of an unmanned robotic airship," *Proceedings of the IEEE*, vol.91, no.3, pp. 463-474, Mar 2003
- [25] Kim, J.; Keller, J.; Kumar, V., "Design and verification of controllers for airships," *Intelligent Robots and Systems, 2003. (IROS 2003). Proceedings. 2003 IEEE/RSJ International Conference on*, vol.1, no., pp. 54-60 vol.1, 27-31 Oct. 2003
- [26] Lacroix, S.; Il-Kyun Jung, "High resolution terrain mapping with an autonomous blimp," *Intelligent Robots and System, 2002. IEEE/RSJ International Conference on*, vol.1, no., pp. 781-786 vol.1, 2002
- [27] Hygounenc, E.; Soueres, P., "Lateral path following GPS-based control of a small-size unmanned blimp," *Robotics and Automation, 2003. Proceedings. ICRA '03. IEEE International Conference on*, vol.1, no., pp. 540-545 vol.1, 14-19 Sept. 2003
- [28] Hygounenc, Emmanuel, Jung, Il-Kyun, Soueres, Philippe, Lacroix, Simon, "The Autonomous Blimp Project of LAAS-CNRS: Achievements in Flight Control and Terrain Mapping" *The International Journal of Robotics Research* 2004 23: 473-511
- [29] Fukao, T.; Fujitani, K.; Kanade, T., "An autonomous blimp for a surveillance system," *Intelligent Robots and Systems, 2003. (IROS 2003). Proceedings. 2003 IEEE/RSJ International Conference on*, vol.2, no., pp. 1820-1825 vol.2, 27-31 Oct. 2003
- [30] Bestaoui, Y., "Characterization of non trim trajectories of an autonomous underactuated airship in a low velocity flight," *Robotics and Automation, 2005. ICRA 2005. Proceedings of the 2005 IEEE International Conference on*, vol., no., pp. 2259-2264, 18-22 April 2005
- [31] Takaya, T.; Kawamura, H.; Minagawa, Y.; Yamamoto, M.; Ouchi, A., "Motion Control in Three Dimensional Round System of Blimp Robot," *SICE-ICASE, 2006. International Joint Conference*, vol., no., pp.1291-1294, 18-21 Oct. 2006
- [32] Fukushima, H.; Kon, K.; Matsuno, F.; Hada, Y.; Kawabata, K.; Asama, H., "Constrained Model Predictive Control: Applications to Multi-Vehicle Formation and an Autonomous Blimp," *SICE-ICASE, 2006. International Joint Conference*, vol., no., pp.4515-4520, 18-21 Oct. 2006
- [33] Fukushima, H.; Kon, K.; Hada, Y.; Matsuno, F.; Kawabata, K.; Asama, H., "State-Predictive Control of an Autonomous Blimp in the Presence of Time Delay and Disturbance," *Control Applications, 2007. CCA 2007. IEEE International Conference on*, vol., no., pp.188-193, 1-3 Oct. 2007
- [34] Weisbin, C.; Mrozinski, J.; Hua, H.; Shelton, K.; Smith, J.H.; Elfes, A.; Lincoln, W.; Adumitroaie, V.; Silberg, R., "Human-Robot Lunar Exploration: Pressurized vs. Unpressurized Rovers," *Systems Engineering, 2008. ICSENG '08. 19th International Conference on*, vol., no., pp.8-12, 19-21 Aug. 2008