

1. Question 1

- (1.1) document The open-loop step response of the system is shown in the Simulink model (Figure 1) below with the response shown in Figure 2.




Figure 1: Simulink model of the open-loop step response

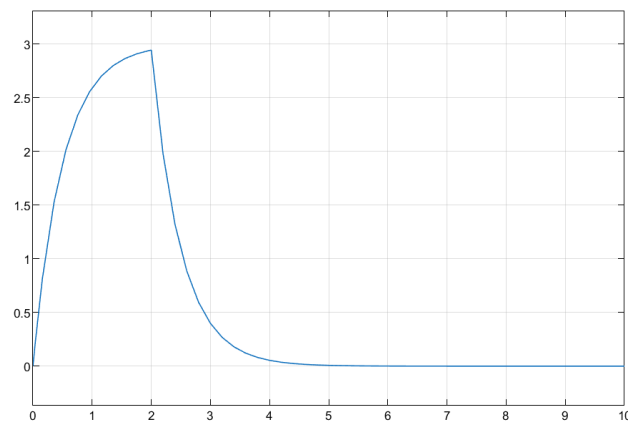


Figure 2: Open-loop step response

To identify the gain and time constant for this system, we can rearrange the transfer function to isolate the gain K and time constant τ :

The given transfer function is:

$$G_p(s) = \frac{6}{s+2}$$

To express this in the standard first-order form, which is:

$$G(s) = \frac{K}{\tau s + 1}$$

where K is the gain and τ is the time constant.

We rearrange $G_p(s)$ as follows:

$$G_p(s) = \frac{6}{2(\frac{1}{2}s + 1)} = \frac{3}{\frac{1}{2}s + 1}$$

Thus, we identify the gain K and the time constant τ as:

$$K = 3, \quad \tau = \frac{1}{2}$$

2. Question 2

(2.1) placeholder