


Akıllı Otopark

Arda akmaktepe



Devre Şeması

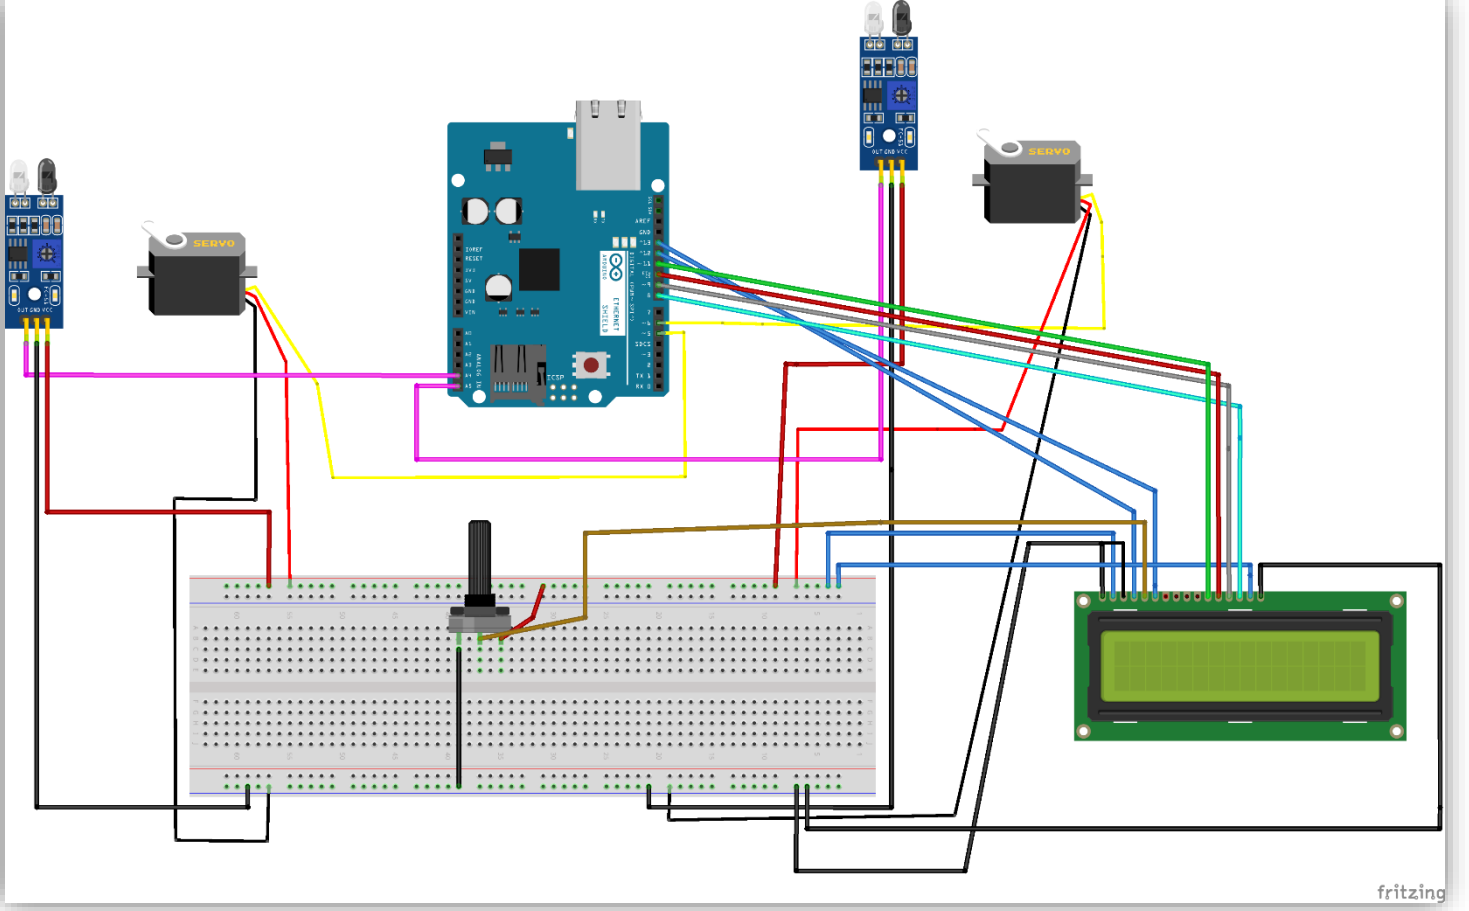

Malzeme Listesi

- ✓ Arduino Uno 1adet
- ✓ Breadboard 1adet
- ✓ Lcd Ekran 1adet
- ✓ Servo Motor(sg90) 2adet
- ✓ Tcrt5000 2adet
- ✓ Potansiyometre 1adet
- ✓ Jumper Kablo

-KODLAMA-

```
#include<Servo.h>
#include <LiquidCrystal.h>

//      (Rs, E, D4, D5, D6 ,D7)
LiquidCrystal lcd(13 , 12, 11 , 10 , 9 , 8);
Servo giris;
Servo cikis;

const byte giris_pini = A5;
const byte cikis_pini = A4;

int arac=0;
int gir;
int cik;
void setup()
{
    Serial.begin(9600);

    lcd.begin(16, 2);
    giris.attach(6);
    cikis.attach(5);

    giris.write(90);
    cikis.write(0);
    delay(1500);
    lcd.clear();
    lcd.setCursor (0, 0);
    lcd.println("  OTOPARK  ");
    lcd.setCursor (0, 1);
    lcd.println("  UYGULAMASI  ");
    delay(2000);
```

```

    giris.write(0);
    cikis.write(90);
}

void loop()
{

    gir = analogRead (giris_pini);
    cik = analogRead (cikis_pini);

    Serial.print(" gir ");Serial.print(gir);
    Serial.print(" cik ");Serial.print(cik);

    {

        lcd.setCursor (0, 0);
        lcd.print("AKILLI OTOPARK ");
        lcd.setCursor (0, 1);
        lcd.print("Icerdeki Arac= ");
        lcd.print(arac);lcd.print(" ");
    }
    if(arac < 6)
    {
        lcd.setCursor (0, 0);
        lcd.print("AKILLI OTOPARK ");
        lcd.setCursor (0, 1);
        lcd.print("Icerdeki Arac= ");
        lcd.print(arac);lcd.print(" ");

    }
    if(gir < 500)
    {
        if(arac == 0)
        {
            lcd.setCursor (0, 0);

```

```
lcd.print(" AKILLI OTOPARK ");  
  lcd.setCursor (0, 1);  
lcd.print("ICERDE ARABA YOK");  
delay(1000);  
}  
if (arac > 0)  
{  
  arac=arac-1;
```

```
  lcd.setCursor (0, 0);  
lcd.print(" Arac CIKIYOR ");  
  lcd.setCursor (0, 1);  
lcd.print("Icerdeki Arac= ");  
lcd.print(arac);lcd.print(" ");  
  cikis.write(0);  
  delay(100);  
while (gir < 500)  
{
```

```
  gir = analogRead (giris_pini);  
  delay(50);  
}  
delay(3000);
```

```
  cikis.write(90);  
  
}  
}
```

```
//-----  
if(cik <500)  
{  
  
  if(arac > 5)
```

```

{
  lcd.setCursor (0, 0);
  lcd.print("  Arac Geldi  ");
  lcd.setCursor (0, 1);
  lcd.print("  OTOPARK DOLU  ");
  delay(1000);
}
else if(arac <6)
{

  arac=arac+1;

  lcd.setCursor (0, 0);
  lcd.print("Arac Geldi  ");
  lcd.setCursor (0, 1);
  lcd.print("Icerdeki Arac= ");
  lcd.print(arac);lcd.print(" ");
  giris.write(90);
  delay(100);

  while (cik < 500)
  {
    cik = analogRead (cikis_pini);
    delay(50);
  }
  delay(3000);
  giris.write(0);

}
}
}

```