


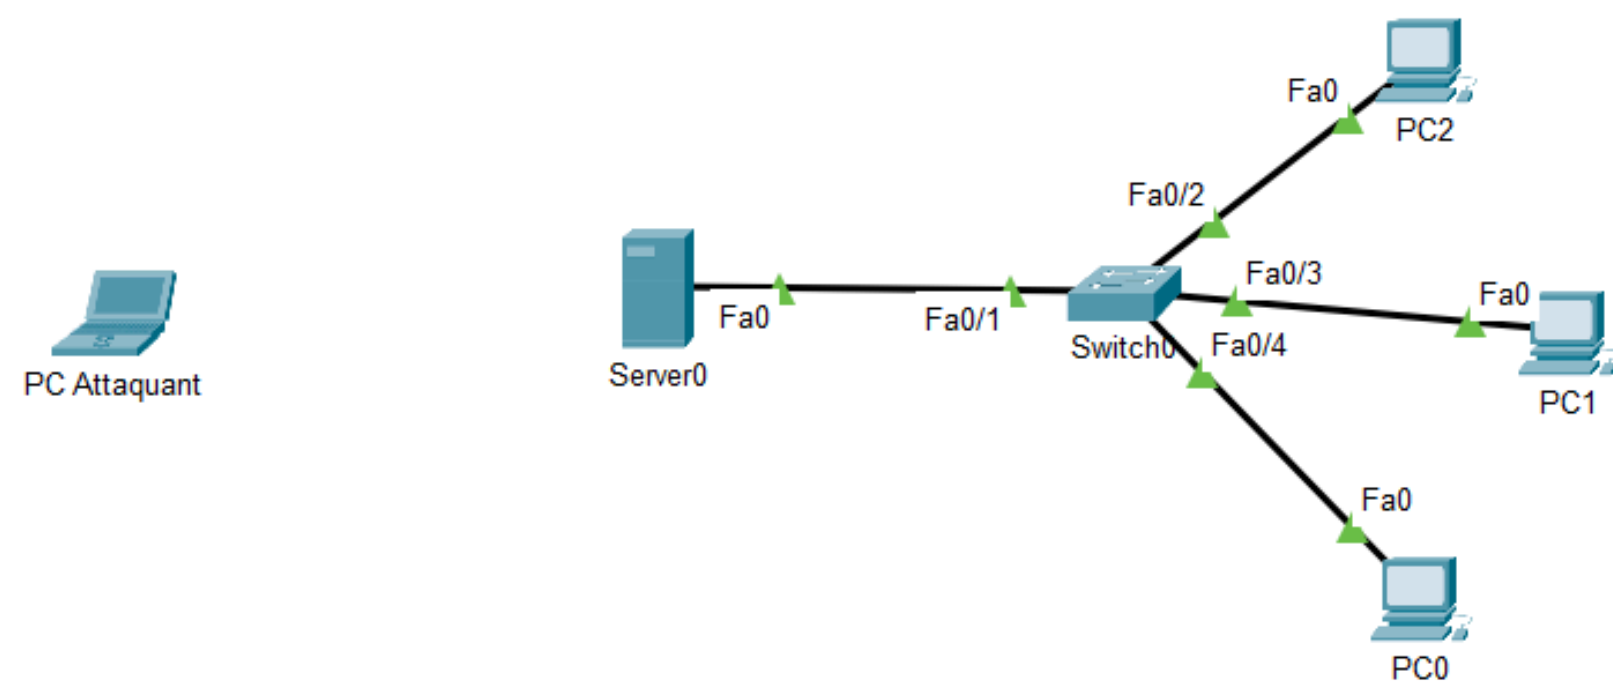

Le shema de base ce presente comme cela

Server0

Physical **Config** Services Desktop Programming Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

Global Settings

Display Name Server0

Gateway/DNS IPv4

☒ DHCP

☐ Static

Default Gateway

DNS Server

Gateway/DNS IPv6

☐ Automatic

☒ Static

Default Gateway

DNS Server

☐ Top

Les PC sont en DHCP

Server0

Physical Config **Services** Desktop Programming Attributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DHCP

Interface FastEthernet0 Service ☒ On ☐ Off

Pool Name LAN_POOL

Default Gateway 192.168.1.1

DNS Server 8.8.8.8

Start IP Address : 192 168 1 10

Subnet Mask: 255 255 0 0

Maximum Number of Users : 10

TFTP Server: 0.0.0.0


WLC Address: 0.0.0.0

Add Save Remove


Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
LAN_POOL	192.16...	8.8.8.8	192.16...	255.25...	10	0.0.0.0	0.0.0.0
serverPool	0.0.0.0	0.0.0.0	192.16...	255.25...	10	0.0.0.0	0.0.0.0

☐ Top


Mon serveur aussi avec un max de 10 user

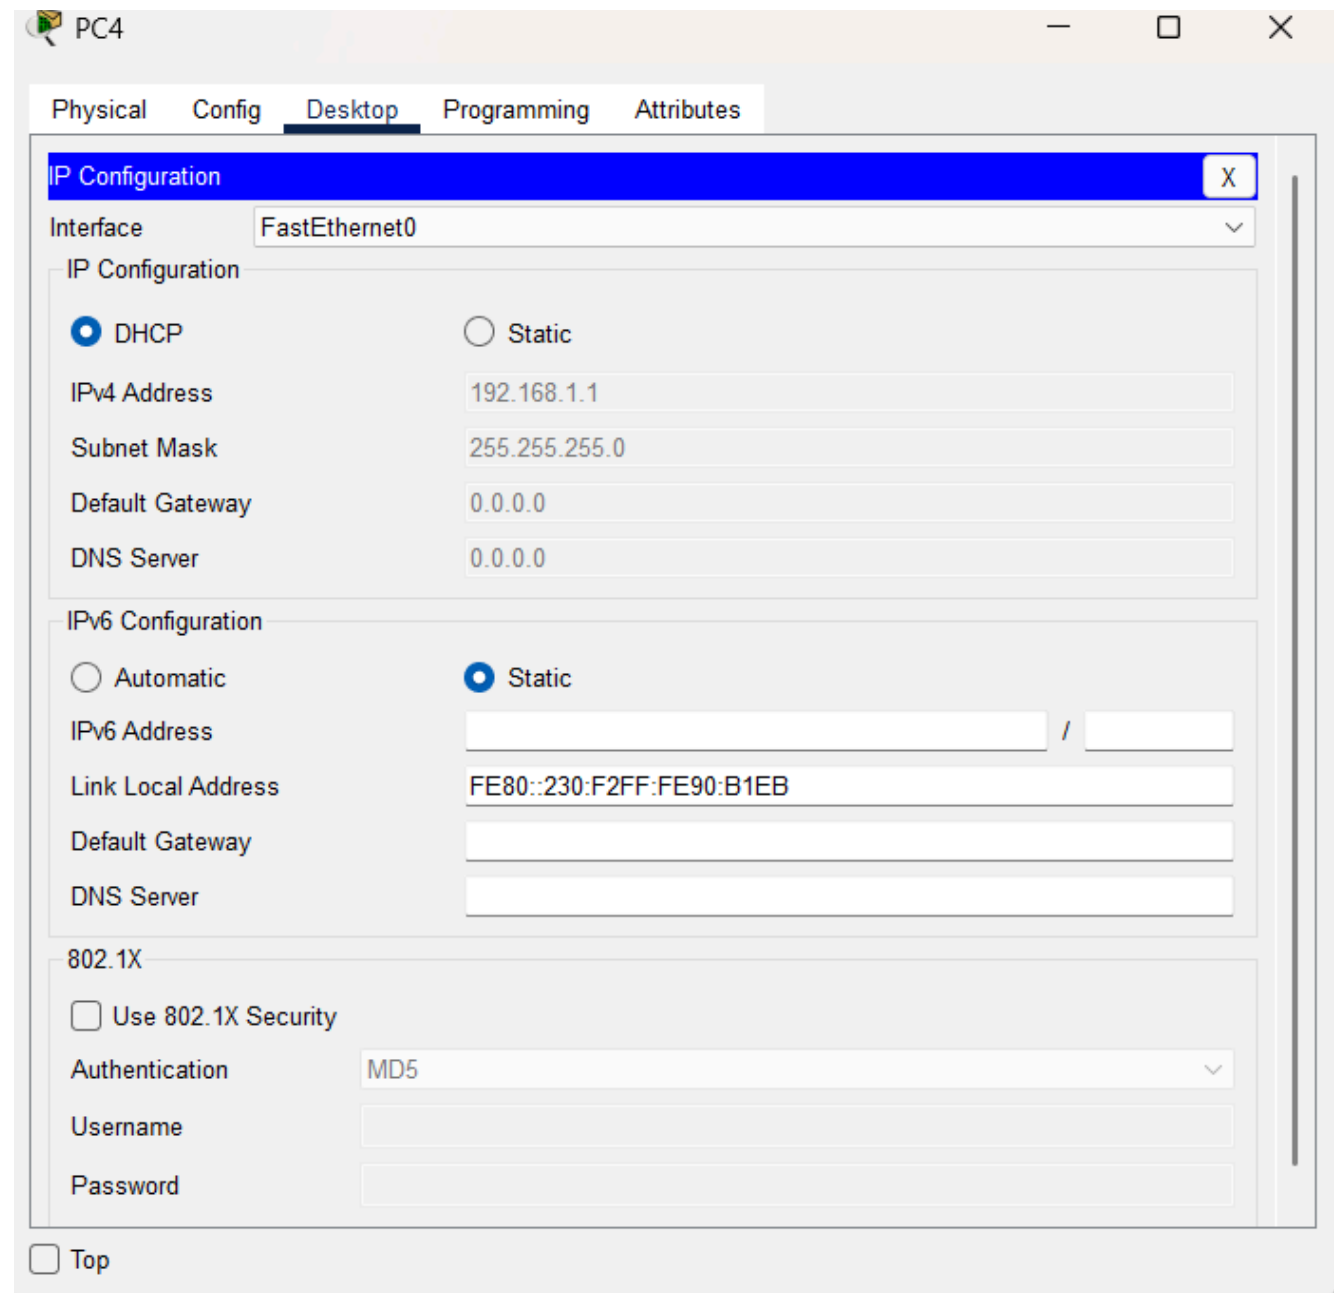

Mes pc reliés au switch trouve leur conf DHCP avec une bonne adresse IP

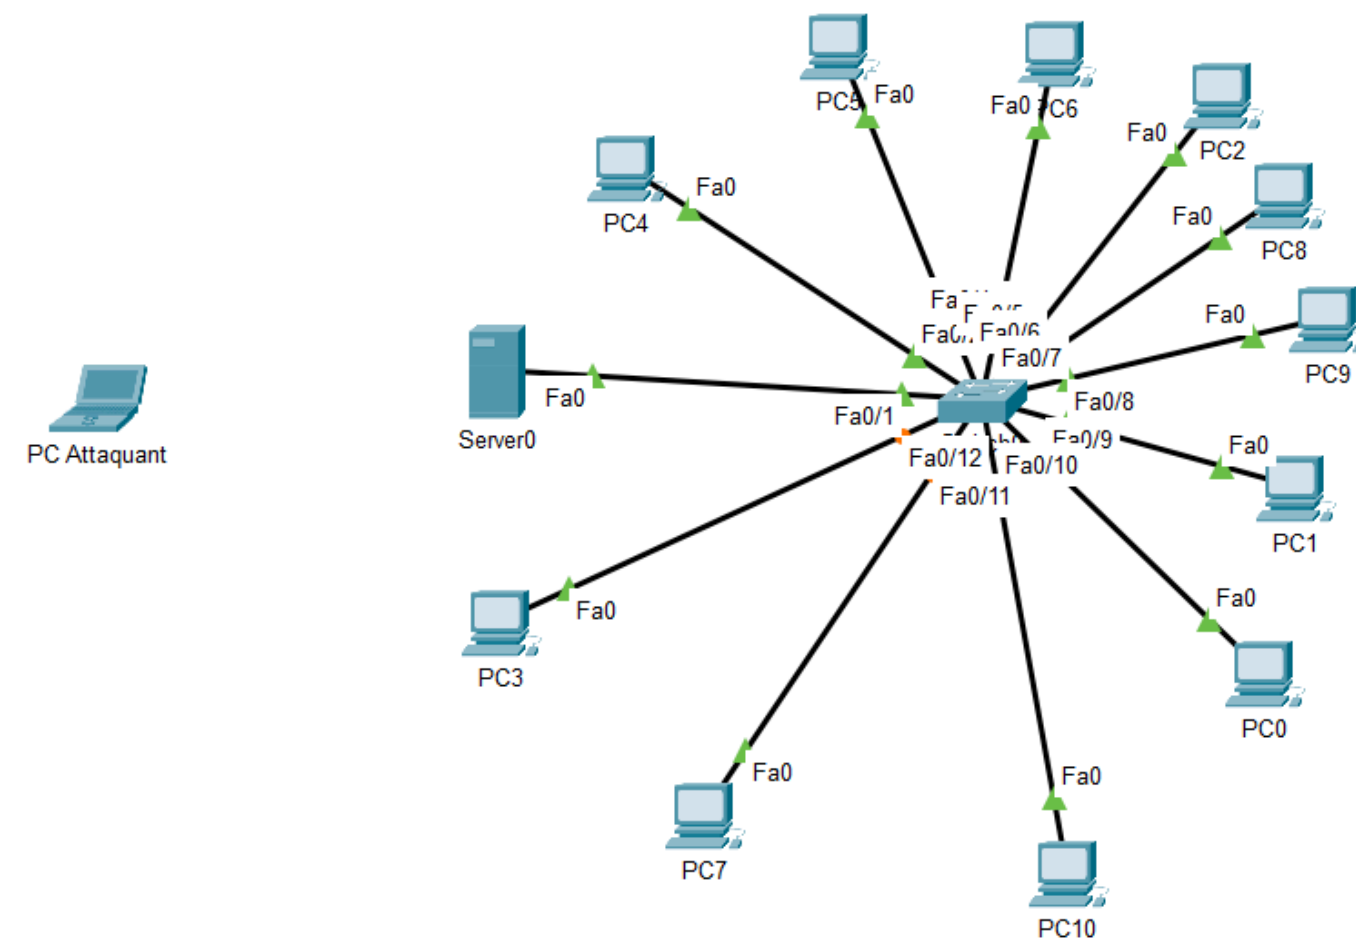


Je vais donc pouvoir connecter mes 10 PC au switch

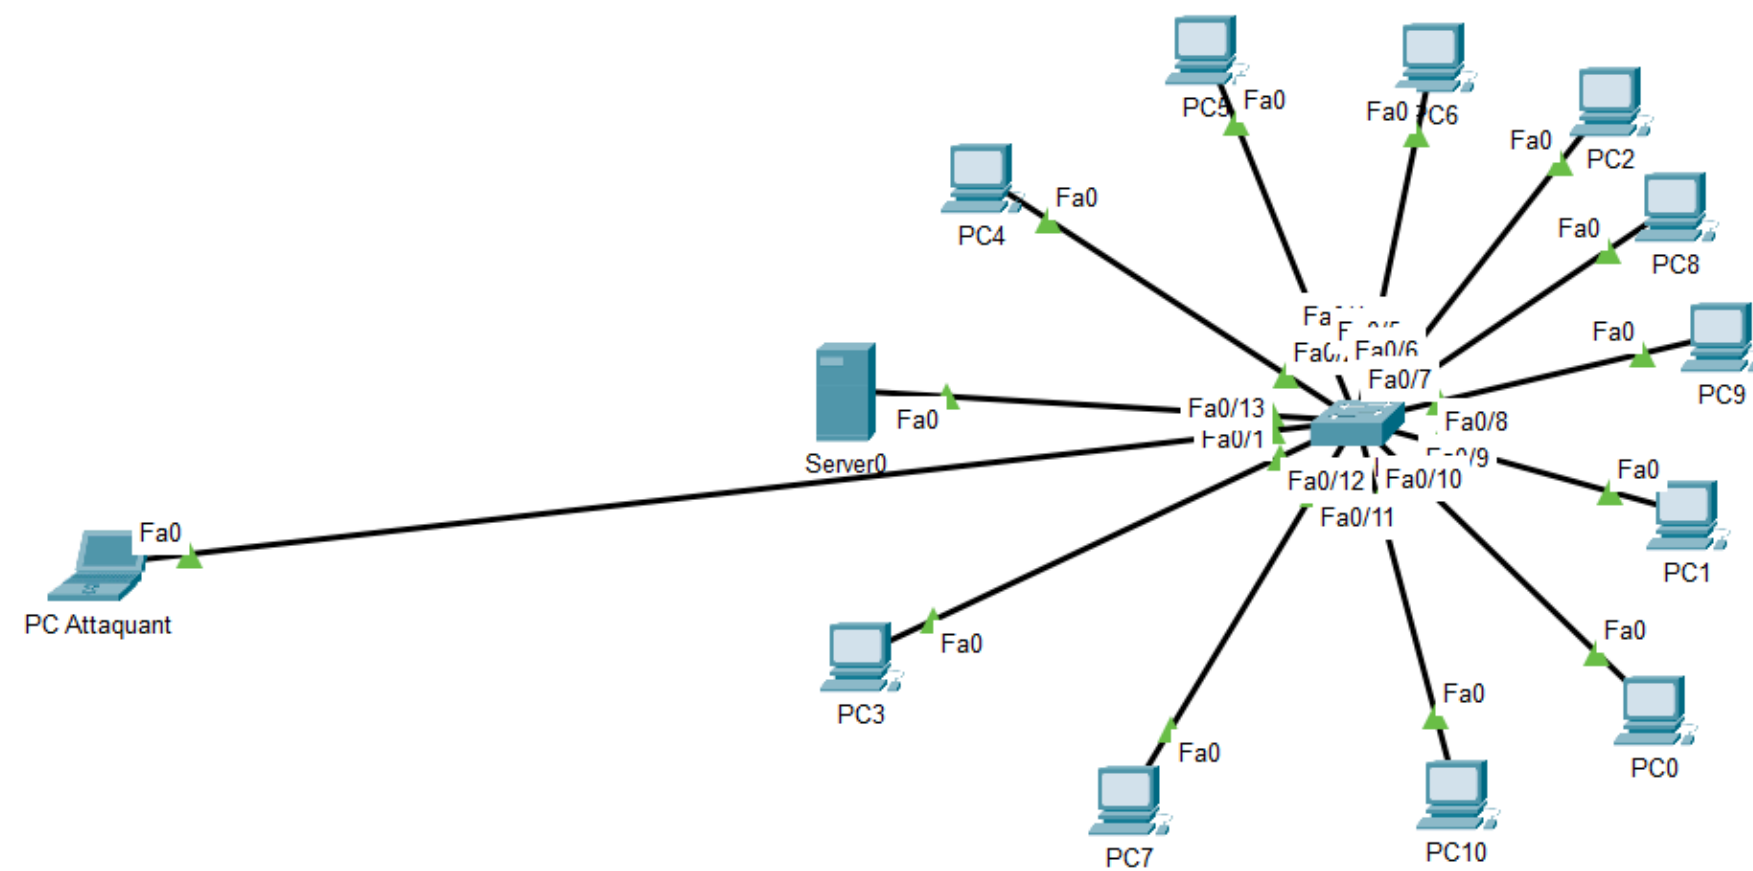

L'ajout d'un PC attaquante crée un probleme de DDOS car les 10 users sont deja utilisés

Donc j'ai 11 PC pour 10 emplacements reseau

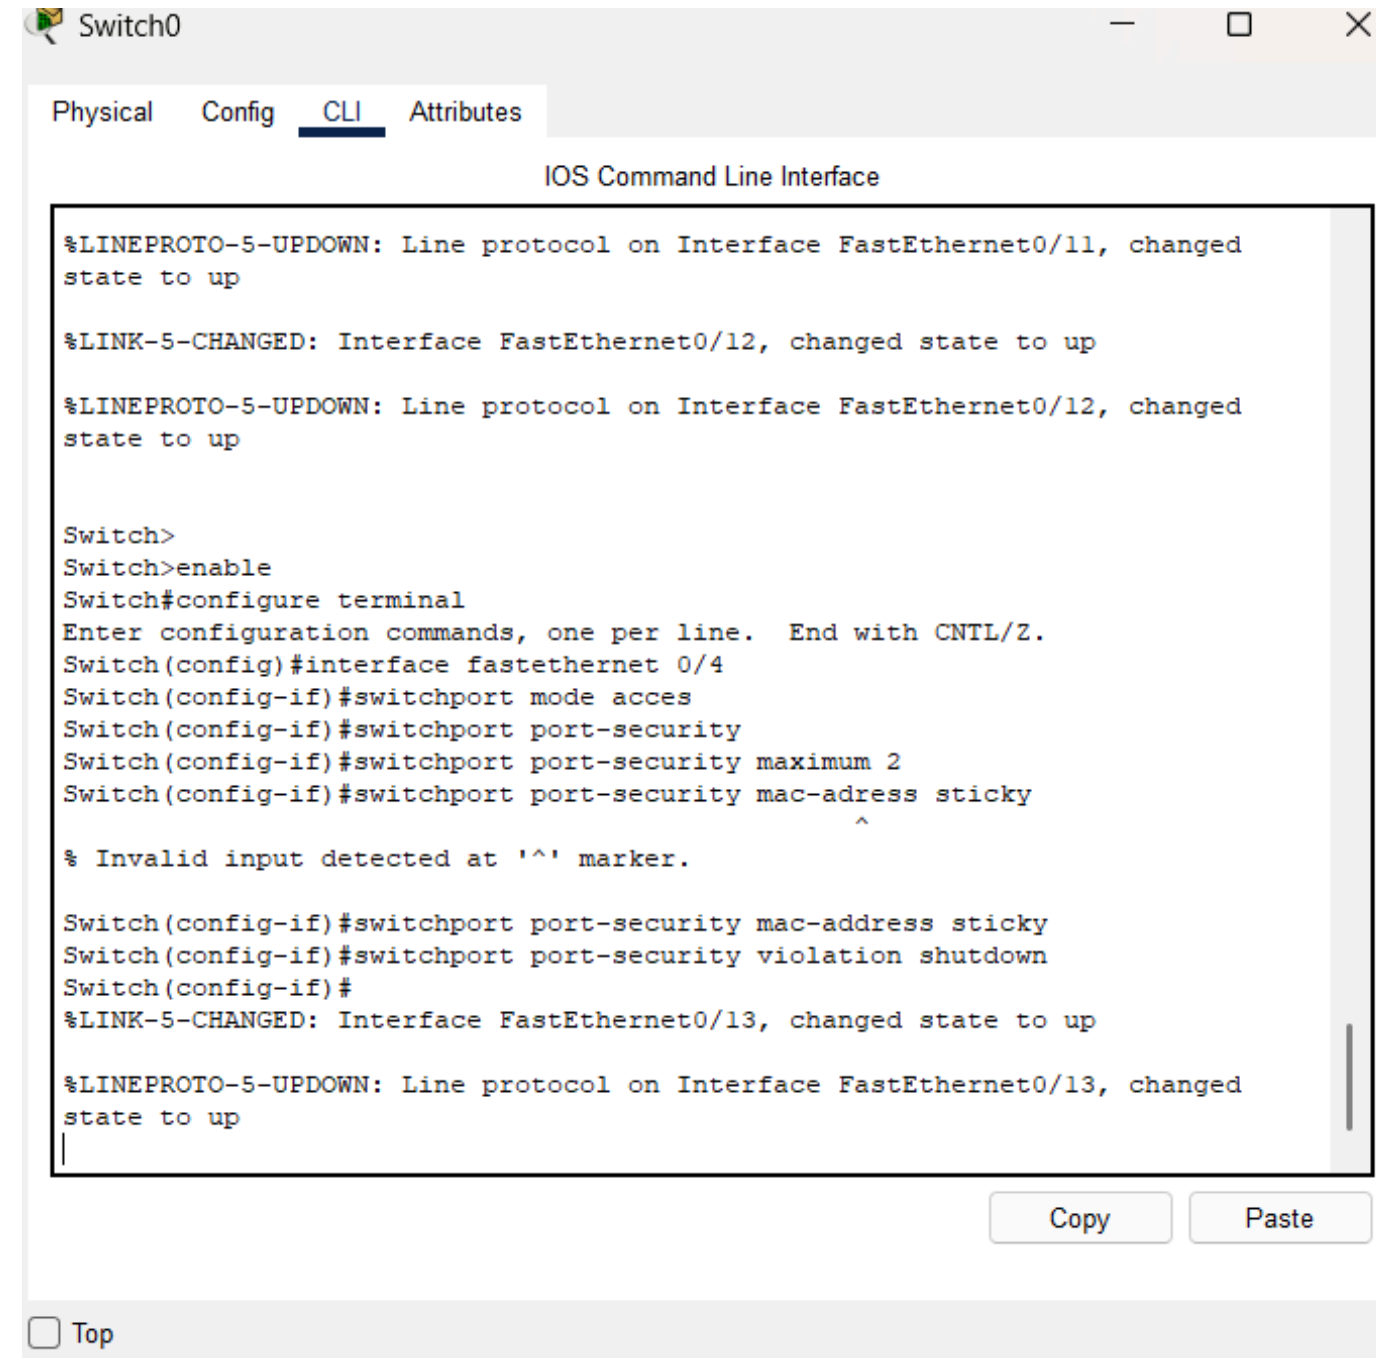

The screenshot shows a web-based interface for a network switch named 'Switch0'. The 'CLI' tab is selected, displaying the 'IOS Command Line Interface'. The interface shows a series of status messages and configuration commands. The status messages indicate that the line protocol on FastEthernet0/11 and FastEthernet0/12 has changed state to up, and that the state of FastEthernet0/12 and FastEthernet0/13 has also changed to up. The configuration commands show the user entering 'enable' to get into privileged mode, then 'configure terminal' to enter configuration mode. The user then configures FastEthernet0/4 with 'switchport mode access', 'switchport port-security', 'switchport port-security maximum 2', and 'switchport port-security mac-address sticky'. An error message indicates that an invalid input was detected at the '^' marker. The user then configures FastEthernet0/13 with 'switchport port-security mac-address sticky', 'switchport port-security violation shutdown', and 'switchport port-security mac-address sticky'. The interface also includes a 'Copy' button, a 'Paste' button, and a 'Top' link.

```
Switch0
Physical Config CLI Attributes
IOS Command Line Interface

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/11, changed
state to up

%LINK-5-CHANGED: Interface FastEthernet0/12, changed state to up


%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/12, changed
state to up

Switch>
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#interface fastethernet 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport port-security
Switch(config-if)#switchport port-security maximum 2
Switch(config-if)#switchport port-security mac-adress sticky
Switch(config-if)#switchport port-security mac-address sticky
Switch(config-if)#switchport port-security violation shutdown
Switch(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/13, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/13, changed
state to up

Copy Paste
Top
```

J'exécute cette commande sur le switch afin que l'ajout d'un 11e port ne crée pas une surcharge sur le réseau

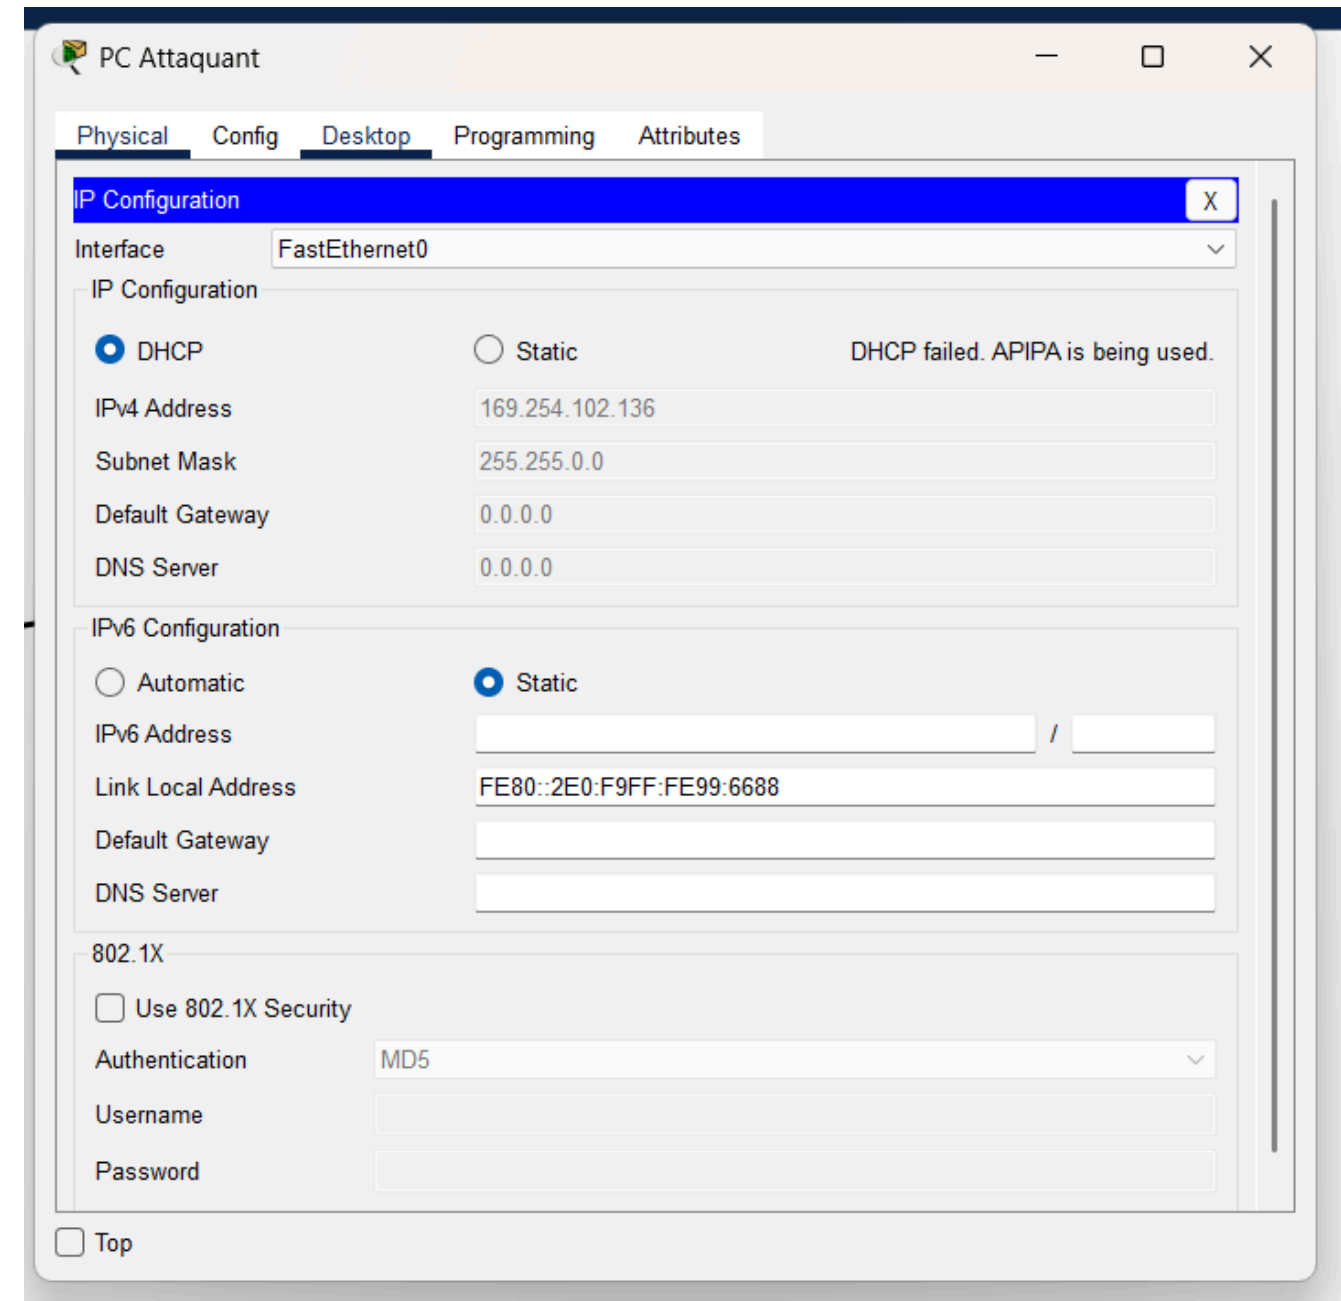

Le PC attaquant ne peut donc plus crée de problème car il ne récupère pas d'IP sur le réseau