


Plug each module into the correct JST port

STEM
Build
Learn
Create

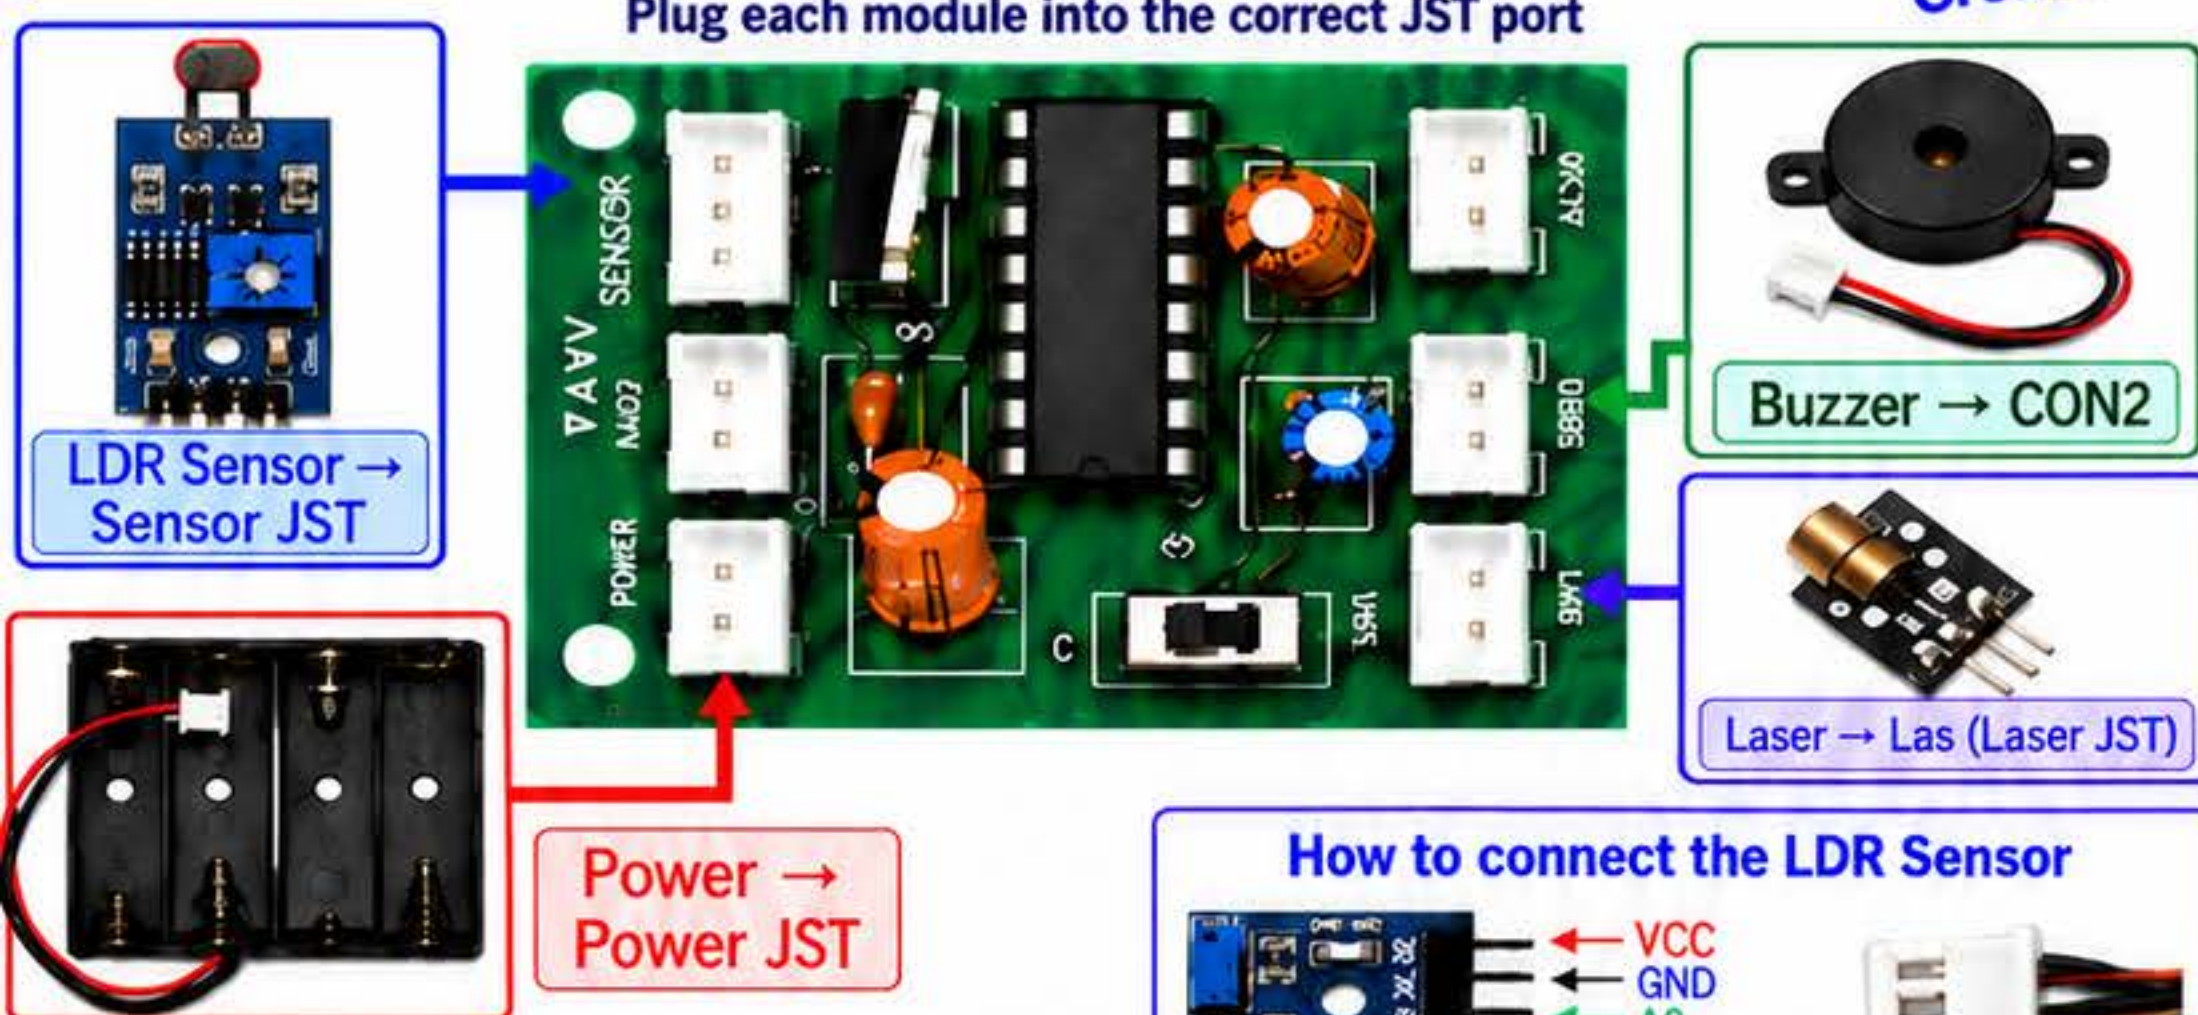

Prepare the Chassis by following the “Steps to Assemble Chassis” on Page 3

Mount the battery holder on chassis at Position 1 using Velcro

Mount the PCB Board on the Chassis at Position 2 using Velcro

Mount the LDR Sensor on the Chassis at Position 4 using Velcro

Connect the LDR Sensor to the Sensor JST connector on the PCB board using the 3-pin to 3-pin JST cable

Mount the Laser Module on the Chassis at Position 5 and connect the Laser JST connector to LAS Connector on the PCB board


Mount the Buzzer on the Chassis at Position 6 and connect the Buzzer JST to CON2 JST connector on the PCB Board

Mount the Mirror on the Clay provided in a way that the Laser light from the Laser Module falls on the Mirror and is reflected back to the LDR sensor

Connect the Battery Holder to the Power JST connector on the PCB board

Check that all connections are secure before switching on the power

How to connect the LDR Sensor

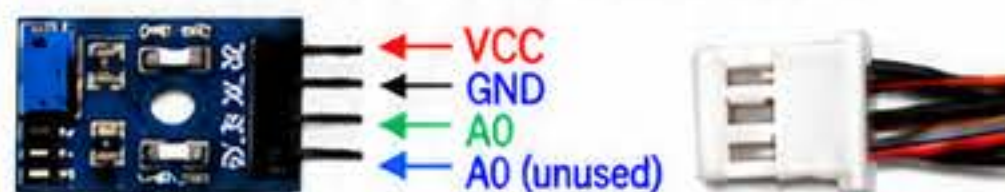

LDR Sensor: plug the 3-pin JST onto VCC, GND and Do. Leave A0 unused.



How to Try It

Switch ON the circuit.

Mount the mirror on the clay in a way that the light from the laser is reflected back to the LDR.

Block the laser beam between the mirror and LDR sensor.

The buzzer should start ringing.

Move your hand away and the buzzer stops.



Warning:

Do not focus the laser on the eye!!

How It Works

A simple light beam security system

1 Normal State

Laser beam reaches the LDR sensor
(reflection detected)




Buzzer: OFF

The reflected laser light hits the LDR sensor.

2 Alarm State

Laser beam is blocked
(reflection lost)

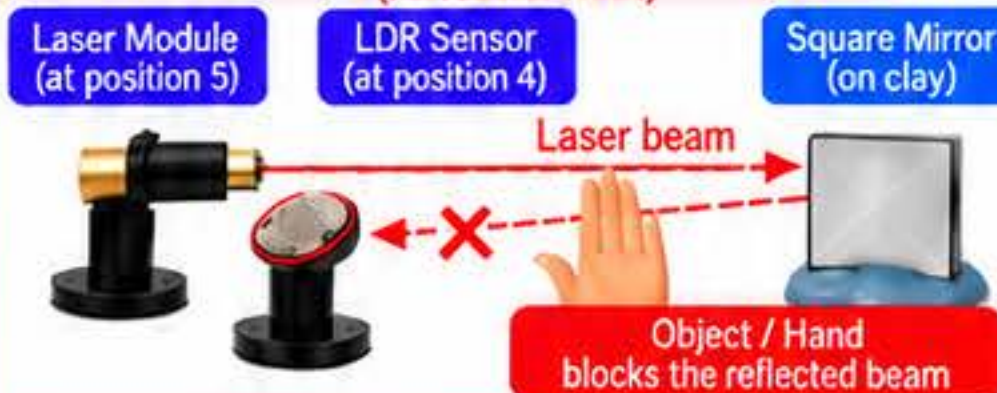

Buzzer: ON

The reflected laser light is blocked,
the LDR drops and the buzzer starts ringing.

Use clay to mount the mirror at a distance from the LDR sensor.

EXPLORE • LEARN • INNOVATE

⇒ Small Projects. Big Possibilities!