



Plug each module into the correct JST port




IR Sensor →
Sensor JST



Water Pump →
CON1




Power →
Power JST

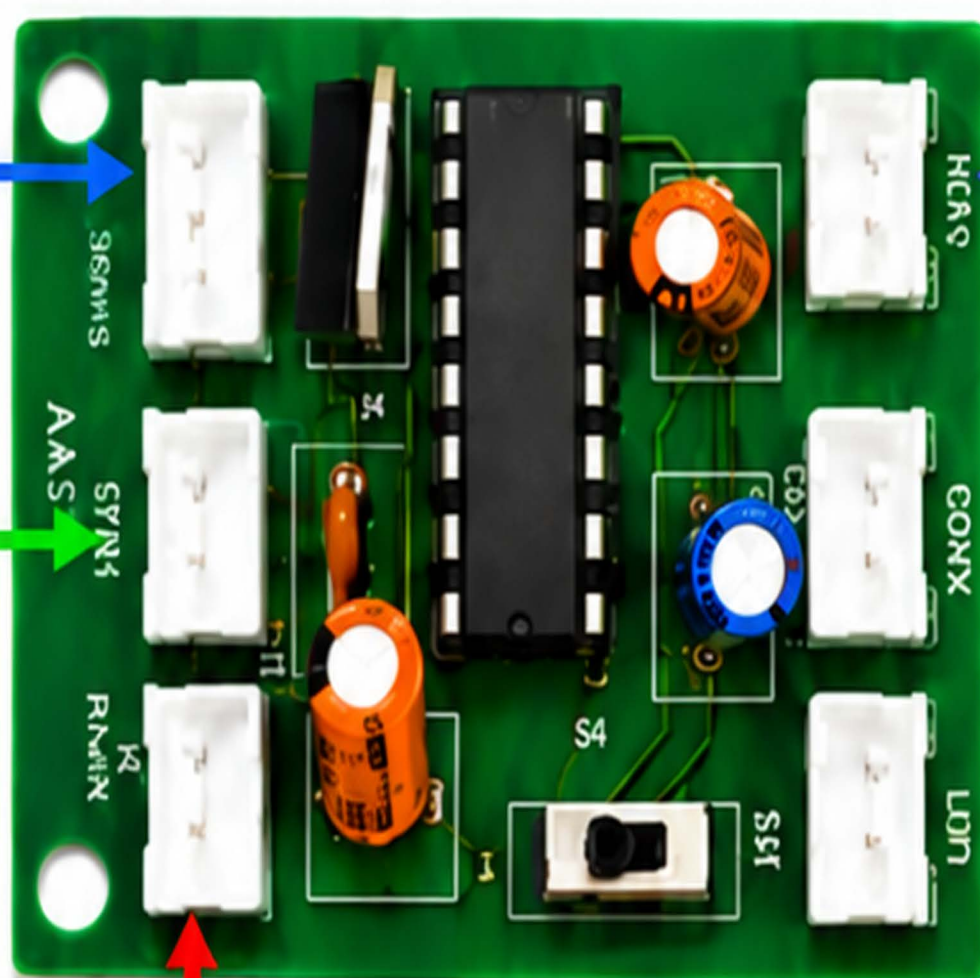

Reverse → REV

How to connect the IR Sensor

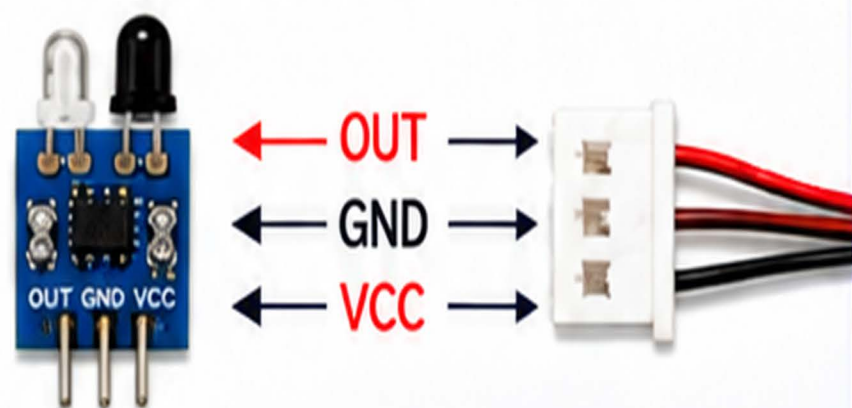

IR Sensor: plug the 3-pin JST onto
OUT, GND and VCC as shown.

Setup Steps

- 1 Prepare the Chassis by following the 'Steps to Assemble Chassis' on Page 3.
- 2 Mount the battery holder on chassis at Position 1 using Velcro.
- 3 Mount the PCB Board on the chassis at Position 2 using Velcro.
- 4 Mount the IR Sensor on the chassis at Position 3 using Velcro.
- 5 Connect the IR Sensor to the Sensor JST connector on the PCB board using the 3-pin to 3-pin JST cable.
- 6 Connect the Water Tube to the Water Pump (intake help from any Adult).
- 7 Immerse the Water Pump in a Beaker or Mug filled with hand sanitizer (keep the liquid away from the PCB board or other electronic parts).
- 8 Connect the Water Pump JST to CON1 JST connector on the PCB board.
- 9 Connect the Reverse JST cable to REV JST connector on the PCB board.
- 10 Connect the Battery Holder to the Power JST connector on the PCB board.
- 11 Check that all connections are secure before switching on the power.

How It Works



When your hand comes near the IR sensor, the water pump runs and sanitizer is dispensed. When you move your hand away, the water pump stops.

This works like an automatic hand sanitizer, keeping your hands clean, safe and healthy!

How to Try It

- 1 Fill a beaker or mug with hand sanitizer and place the water pump inside it (make sure the pump is fully immersed).
- 2 Switch ON the circuit.
- 3 Place your hand in front of the IR sensor (without touching it) – the water pump should run and sanitizer should be dispensed.
- 4 Try adjusting the distance and angle to see how it responds best.



Warning: Keep the liquid away from Electronic parts.



Small Projects. Big Possibilities!

EXPLORE • LEARN • INNOVATE