

E&M Lecture Notes
Part 3: Units 9–14

Contents

1	Faraday's Law of Induction	4
1.1	Faraday's Law of Induction	4
1.2	Quantitative Induction: Loop in a Uniform B-field	5
1.3	Time-Varying B-field	6
1.4	Maxwell's Equations: Getting Close	8
1.5	Important Examples	8
1.5.1	Electric Power Generator	8
1.5.2	Eddy Currents	8
1.5.3	Electromagnetic Shielding	9
1.6	Inductance	10
1.6.1	Self-Induction	10
1.6.2	Analogy to Capacitance	10
1.6.3	Unit of L	10
1.7	Calculating Inductance	10
1.7.1	Solenoid	10
1.7.2	Toroid	11
1.8	LR Circuit	11
1.8.1	Charging (Switch to a)	11
1.8.2	Discharging the LR Circuit (Switch to b after a long time)	12
1.8.3	What is going on physically?	12
1.9	Energy Stored in an Inductor	12
1.10	Energy Density and the B-field	13
1.11	Coaxial Cable	13
	Lecture Pages (Unit 9)	14
2	Electromagnetic Oscillations	32
2.1	LC Oscillators	32
2.1.1	Quantitative Analysis	32
2.1.2	Analogy to the Simple Harmonic Oscillator	32
2.1.3	Setting the Phase from Initial Conditions	33
2.1.4	Energy of the Oscillator	33
2.1.5	Worked Example: Oscillating LC circuit, $L = 10$ mH, $C = 1$ μ F	34
2.2	Induced B-fields	34
2.2.1	Toward Maxwell's Fourth Equation	34
2.3	Displacement Current	35
2.4	Maxwell's Equations	36
	Lecture Pages (Unit 10)	36

3	Electromagnetic Waves	45
3.1	Fields from Time-Varying Sources	45
3.2	Time-Varying Electric Dipole	45
3.2.1	LC Oscillator as a Source	46
3.2.2	Dipole Radiation	46
3.2.3	Polarization of Dipole Radiation	46
3.3	Traveling Waves	46
3.3.1	Periodic Waves	47
3.4	Properties of EM Radiation	47
3.5	The Wave Equation	48
3.6	Poynting Vector: Energy Transport	49
3.7	Polarization	50
3.8	Polarizers	51
3.9	Spherical Waves and Huygens' Principle	52
	Lecture Pages (Unit 11)	52
4	Ray Optics (Geometric Optics)	72
4.1	Rays	72
4.2	Snell's Law of Refraction	72
4.3	Total Internal Reflection	73
4.4	Fiber Optics	73
4.5	Flat Mirrors	74
4.6	Curved Mirrors (Concave)	74
4.7	Parallel Rays and the Focal Plane	75
4.8	Images and Ray-Tracing Rules	75
4.9	Convex Mirror	75
4.10	Sign Rules: Lenses vs Mirrors	76
4.11	Refracting Surface	77
4.12	Thin Lens (Two Refracting Surfaces)	77
4.13	Rules for Making Images with Lenses	77
	Lecture Pages (Unit 12)	78
5	Diffraction and Interference	94
5.1	Optical Path Length	94
5.2	Optical Path Length and Phase Shift	94
5.3	A Useful Trick: Adding Waves with a Phase Shift	95
5.4	Diffraction vs Geometric Optics	96
5.5	Young's Double-Slit Experiment	97
5.6	Diffraction Gratings (N slits)	98
5.7	Thin Films	100
	Lecture Pages (Unit 13)	101
6	Diffraction	122
6.1	Diffraction from First Principles	122
6.2	Single-Slit Diffraction	122
6.3	Two-Slit Pattern with Single-Slit Diffraction Envelope	123
6.4	Angular Resolution for a Circular Aperture	123
6.5	Michelson Interferometer — LIGO	124

6.6	Gravitational Waves and LIGO	126
6.7	Bragg Diffraction	127
6.8	De Broglie Waves	128
6.9	Relation of Classical Wave Equation to Quantum Mechanics	128
	Lecture Pages (Unit 14)	129

Chapter 1

Faraday's Law of Induction

1.1 Faraday's Law of Induction

An EMF, $\mathcal{E}$, will be induced in a circuit equal to the negative rate of change of magnetic flux through the circuit:

$$\boxed{\mathcal{E} = -\frac{d\Phi_B}{dt}, \quad \Phi_B = \int \vec{\mathbf{B}} \cdot \hat{n} dA} \quad (1.1)$$

If the circuit is a coil of N turns, then

$$\mathcal{E} = -N \frac{d\Phi_B}{dt} = -\frac{d}{dt}(N\Phi_B), \quad N\Phi_B \equiv \text{flux linkage} \quad (1.2)$$

Example: Magnet Pushed into a Coil

Consider a bar magnet (with N pole facing left toward a coil) being pushed into a coil connected to an ammeter. Pushing the magnet into the coil changes the flux Φ_B through the coil, and induces a current i . *What is the direction of i ?*

Lenz's Law

Lenz's Law: *The induced current will be in the direction that opposes the changing flux in the circuit.*

Two ways to think about Lenz's Law

1) Magnetic dipole picture: The induced current produces a magnetic dipole moment that effectively makes the coil look like a magnet. When a N-pole is pushed in from the left, the side of the coil facing the incoming magnet becomes a N-pole as well, so the two N-poles *repel* each other (resisting the motion of the magnet into the loop).

2) Flux cancellation picture: The induced current produces a B-field inside the loop that points opposite to the magnet's increasing field, thus reducing the change in flux penetrating the loop.

Pulling the Magnet Away

If you pull the magnet away (with N-pole toward the coil moving away), the flux through the loop is now *decreasing*. By Lenz's law, the induced current reverses direction:

- The induced current's magnetic dipole now *attracts* the magnet (S-pole faces the receding N-pole).
- The induced B-field *adds to* the flux in the loop (to help it persist).

In both cases, the induced effect opposes the *change*, not the flux itself.

1.2 Quantitative Induction: Loop in a Uniform B-field

Consider a rectangular wire loop being pulled out of a uniform magnetic field $\vec{\mathbf{B}}$ (pointing into the page) at speed v by an external force $\vec{\mathbf{F}}_h$ (the “hand”).

Definitions:

- y = length of loop currently inside the B-field
- ℓ = width of loop (perpendicular to motion)
- $\vec{\mathbf{F}}_h$ = force pulling wire loop out of B-field at speed v
- i = induced current in loop
- R = resistance of loop

Computing the Induced EMF

The flux in the loop is

$$\Phi_B = \int \vec{\mathbf{B}} \cdot \hat{\mathbf{n}} dA = B\ell y \quad (1.3)$$

Taking the time derivative (as the loop is pulled out, y decreases; we track magnitudes here):

$$\frac{d\Phi_B}{dt} = B\ell \frac{dy}{dt} = B\ell v \quad (1.4)$$

So the induced EMF is

$$-\frac{d\Phi_B}{dt} = \mathcal{E} = B\ell v \quad (1.5)$$

(The minus sign just reminds us to set the current direction by Lenz's Law.)

For loop resistance R , the induced current is

$$\boxed{i = \frac{\mathcal{E}}{R} = \frac{B\ell v}{R}} \quad (1.6)$$

The direction of current shown adds flux as it is being reduced by motion out of the B-field — consistent with Lenz's Law.

Analysis of Forces

Three pieces of the loop carry current in the B-field. Using $\vec{\mathbf{F}} = i\vec{\mathbf{L}} \times \vec{\mathbf{B}}$ and the right-hand rule (RHR):

$$\vec{\mathbf{F}}_2 = i\vec{\mathbf{y}} \times \vec{\mathbf{B}} = iyB \quad (\text{upward}) \quad (1.7)$$

$$\vec{\mathbf{F}}_3 = i\vec{\mathbf{y}} \times \vec{\mathbf{B}} = iyB \quad (\text{downward}) \quad (1.8)$$

$$\vec{\mathbf{F}}_2 + \vec{\mathbf{F}}_3 = 0 \quad (1.9)$$

The vertical forces on the top and bottom segments cancel. For the left vertical segment (still in the field):

$$\vec{\mathbf{F}}_1 = -i\ell B \hat{y} \quad (1.10)$$

This force opposes the motion of the loop. The hand must pull with

$$\vec{\mathbf{F}}_h = +i\ell B \hat{y} \quad (1.11)$$

Because $\vec{\mathbf{F}}_y = \vec{\mathbf{F}}_1 + \vec{\mathbf{F}}_h = 0 \implies a_y = 0 \implies v = \text{constant}$.

Energy Balance

The hand must do work against $\vec{\mathbf{F}}_1$ (induced by i) at a rate

$$F_h v = i\ell B v = \left(\frac{B\ell v}{R} \right) \ell B v = \frac{B^2 \ell^2 v^2}{R} \quad (1.12)$$

This is the work per unit time the hand does to maintain a steady v .

The power dissipated in the loop due to current i is

$$P_R = i^2 R = \frac{B^2 \ell^2 v^2}{R} \quad (1.13)$$

So $P_R = F_h v$ — we have converted mechanical energy into electrical energy.

Concept Check

What current is induced in a loop sitting *entirely inside* a uniform B-field while being pulled by F_h ?

Answer: $i = 0$, because the flux Φ_B is not changing (the loop's full area is in the field). So

$$\mathcal{E} = -\frac{d\Phi_B}{dt} = 0 \implies \frac{\mathcal{E}}{R} = 0 \quad (1.14)$$

1.3 Time-Varying B-field

We previously saw we got an EMF when a loop moved in a constant B-field — because Φ_B changed. We can also change a flux Φ_B by varying the B in $\int \vec{\mathbf{B}} \cdot \hat{n} dA$.

Experimentally we find that an EMF develops when $dB/dt \neq 0$ even when there is no circuit. The EMF is associated with an induced **E-field**:

$$\boxed{-\frac{d\Phi_B}{dt} = \mathcal{E} = \oint \vec{\mathbf{E}} \cdot d\vec{\ell}} \quad (1.15)$$

Example: Cylindrical Region of Changing B-field

Consider a region $r < R$ where $\vec{B}$ points into the page and $dB/dt > 0$.

As $dB/dt > 0$, an E-field develops at radius r even though there is no circuit. The direction of $\vec{E}$ is the same as would be required to drive an induction current at r (by Lenz's Law). The direction of $\vec{E}$ is determined by symmetry — it must be tangential and form closed loops.

Inside the field region ($r < R$)

$$\mathcal{E} = -\frac{d\Phi_B}{dt} = -\pi r^2 \frac{dB}{dt} \quad (1.16)$$

If there were an induction current, it would be driven by an $\vec{E}$ as shown, to oppose the increasing flux in the loop.

$$\mathcal{E} = \oint \vec{E} \cdot d\vec{\ell} = E(2\pi r) = -\pi r^2 \frac{dB}{dt} \quad (1.17)$$

$$\boxed{E(r) = -\frac{r}{2} \frac{dB}{dt} \quad (r < R)} \quad (1.18)$$

This E-field permeates all space at $r < R$.

Outside the field region ($r > R$)

Here the flux is fixed by the field region's area:

$$\Phi_B = \int \vec{B} \cdot \hat{n} dA = B\pi R^2, \quad \frac{d\Phi_B}{dt} = \pi R^2 \frac{dB}{dt} \quad (1.19)$$

$$-\mathcal{E} = \oint \vec{E} \cdot d\vec{\ell} = E(2\pi r) = \pi R^2 \frac{dB}{dt} \quad (1.20)$$

$$\boxed{E(r) = -\frac{R^2}{2r} \frac{dB}{dt} \quad (r > R)} \quad (1.21)$$

The field drops like $1/r$ outside the region. (The $-$ sign is just a reminder of Lenz's Law.)

Important Conceptual Point

E-fields generated by time-varying B-fields do NOT have to begin and end on charges. They can form closed loops.

This is fundamentally different from electrostatics:

- **Electrostatics:** $V_b - V_a = -\int_a^b \vec{E} \cdot d\vec{\ell}$, and in a closed loop ($b = a$): $\oint_C \vec{E} \cdot d\vec{\ell} = 0$.
- **When $dB/dt \neq 0$:** $\oint_C \vec{E} \cdot d\vec{\ell} = -\frac{d\Phi_B}{dt} = -\frac{dB}{dt} A \neq 0$.

The induced E-field is non-conservative.

1.4 Maxwell's Equations: Getting Close

We now have three of the four Maxwell equations, plus a near-complete fourth:

$$\oint_S \vec{\mathbf{E}} \cdot \hat{n} dA = \frac{q_{\text{enc}}}{\epsilon_0} \quad (\text{Gauss's Law for E}) \quad (1.22)$$

$$\oint_S \vec{\mathbf{B}} \cdot \hat{n} dA = 0 \quad (\text{Gauss's Law for B}) \quad (1.23)$$

$$\oint_C \vec{\mathbf{E}} \cdot d\vec{\ell} = -\frac{d}{dt} \int_S \vec{\mathbf{B}} \cdot \hat{n} dA \quad (\text{Faraday's Law}) \quad (1.24)$$

$$\oint_C \vec{\mathbf{B}} \cdot d\vec{\ell} = \mu_0 i_{\text{enc}} + (?) \quad (\text{Ampère — something missing!}) \quad (1.25)$$

The missing piece in Ampère's Law (the displacement current) will come later — it is what completes Maxwell's equations and gives rise to electromagnetic waves.

1.5 Important Examples

1.5.1 Electric Power Generator

Consider a coil (with N turns, dimensions $a \times b$) rotating at frequency ν in a uniform magnetic field $\vec{\mathbf{B}}$. The coil is connected via brushes to an external resistor R .

The flux is

$$\Phi_B = N \int \vec{\mathbf{B}} \cdot d\vec{\mathbf{A}} = N B a b \cos(2\pi\nu t) \quad (1.26)$$

The EMF is, using $\mathcal{E} = -d\Phi_B/dt$:

$$\mathcal{E} = -N B a b \cdot \frac{d}{dt} \cos(2\pi\nu t) = N B a b (2\pi\nu) \sin(2\pi\nu t) \quad (1.27)$$

So

$$\boxed{\mathcal{E} = \mathcal{E}_0 \sin(2\pi\nu t), \quad \mathcal{E}_0 = N B a b (2\pi\nu)} \quad (1.28)$$

$$i = \mathcal{E}/R \quad (1.29)$$

How the brushes work

As the coil rotates, the current is initially in one direction (e.g., $\mathcal{E} < 0$ relative to ground) because the flux through the coil is decreasing. A half cycle later the flux is increasing and the current must change direction; now $\mathcal{E} > 0$. The brushes have movable contact points to accommodate the changing current direction. (For a DC generator the brushes flip the connection synchronously; for an AC generator they ride on slip rings.)

1.5.2 Eddy Currents

Consider a copper sheet being pulled out of a region of B-field (into the page). As the Cu sheet is pulled out, the flux through the Cu sheet decreases.

1. A clockwise (CW) eddy current forms whose magnetic dipole is into the page, to oppose the decrease in Φ_B (by adding B-field to it).

2. The piece of the eddy current in the B-field has an $i\vec{\ell} \times \vec{\mathbf{B}}$ that produces a leftward force, opposing the removal of the Cu sheet.

Both are examples of Lenz's Law at work. Eddy currents dissipate energy as heat — this is the basis of magnetic braking.

1.5.3 Electromagnetic Shielding

Consider a conducting sheet of thickness s and conductivity σ above which sits a point P . There is an external time-varying B-field $\vec{\mathbf{B}}$ pointing upward, with field changing in time.

- $dB/dt > 0 \implies$ CW current in sheet (viewed from above)
- $dB/dt < 0 \implies$ CCW current in sheet

Setting up the calculation

Consider an Amperian loop of radius r inside the sheet:

$$\mathcal{E} = \frac{d}{dt} \int B dA = \pi r^2 \frac{dB}{dt} = \oint \vec{\mathbf{E}} \cdot d\vec{\ell} = E(2\pi r) \quad (1.30)$$

(The sign is dropped here — the direction is set by Lenz's Law.)

$$E = \frac{r}{2} \frac{dB}{dt}, \quad j = \sigma E = \frac{\sigma r}{2} \frac{dB}{dt} \quad (1.31)$$

This is the current density induced in the sheet.

Computing the induced current per unit radius

The induced current is moving in a cross section $dr \times s$:

$$di = j dA = j s dr = \frac{\sigma s}{2} r dr \frac{dB}{dt} \quad (1.32)$$

B-field at the center of an induced ring

For a current loop, the B-field at the center is $B = \mu_0 i / (2r)$, so each ring contributes

$$dB_0 = \frac{\mu_0 di}{2r} = \frac{1}{4} \sigma s \frac{dB}{dt} \mu_0 dr \quad (1.33)$$

Integrating from 0 to R (radius of the induced current region):

$$B_0 = B_{\text{shielding}} = \int dB_0 = \frac{1}{4} \sigma s \mu_0 R \frac{dB}{dt} \quad (1.34)$$

For dB/dt changing rapidly (i.e., high frequency), B_0 becomes large and opposes the external B , so $B(P) \approx 0$. This is the basis of **electromagnetic shielding**.

1.6 Inductance

Consider a solenoid carrying current i , with a wire loop placed around (or inside) it. The solenoid produces

$$B = \mu_0 n i, \quad \frac{dB}{dt} = \mu_0 n \frac{di}{dt} \quad (1.35)$$

Change current in solenoid $\Rightarrow$ change B in loop $\Rightarrow$ induced EMF. This is induction.

1.6.1 Self-Induction

When a current changes in the solenoid, an EMF appears across the solenoid *itself*. This is the **self-inductance**.

$$\mathcal{E} = -\frac{d}{dt}(N\Phi_B), \quad N\Phi_B = \text{number of flux linkages} \quad (1.36)$$

For a given solenoid (or any shaped coil), the number of flux linkages is proportional to i , the current:

$$\boxed{N\Phi_B = Li} \quad (1.37)$$

where L , the **inductance**, is the proportionality constant.

$$\mathcal{E} = -\frac{d}{dt}(N\Phi_B) = -L \frac{di}{dt} \quad (1.38)$$

Or

$$\boxed{L = -\frac{\mathcal{E}}{di/dt}} \quad (1.39)$$

For any geometry — simple coil, solenoid, toroid — as long as there is a current, there is a B-field and a self-inductance.

1.6.2 Analogy to Capacitance

Capacitance	Inductance
Parallel plates $\rightarrow$ any geometry of conductors $C = q/V$	Coil $\rightarrow$ any geometry with current/B-field $L = -\mathcal{E}/(di/dt)$

1.6.3 Unit of L

$$[L] = \frac{[\text{Volt}]}{[\text{A/s}]} = \text{Henry (H)} \quad (1.40)$$

$$1 \frac{\text{Volt} \cdot \text{s}}{\text{A}} = 1 \text{ Henry (1 H)} \quad (\text{SI unit}) \quad (1.41)$$

1.7 Calculating Inductance

1.7.1 Solenoid

For a solenoid of length ℓ , n turns per unit length, cross-sectional area A :

$$B = \mu_0 n i, \quad N = n\ell, \quad N\Phi_B = n\ell B A \quad (1.42)$$

(Here A = area of one loop.)

$$N\Phi_B = n\ell A(\mu_0 ni) = \mu_0 n^2 \ell A i \quad (1.43)$$

$$\boxed{L = \frac{N\Phi_B}{i} = \mu_0 n^2 \ell A \quad (\text{inductance of solenoid})} \quad (1.44)$$

1.7.2 Toroid

A toroid with inner radius a , outer radius b , height h , and N total turns. Use Ampère's Law on a circular Amperian path of radius r inside the toroid:

$$\oint \vec{\mathbf{B}} \cdot d\vec{\ell} = \mu_0 i_{\text{enc}}, \quad B(2\pi r) = \mu_0 Ni \quad (1.45)$$

$$B(r) = \frac{\mu_0 Ni}{2\pi r} \quad (1.46)$$

The flux through one turn (using $dA = h dr$):

$$\Phi_B = \int \vec{\mathbf{B}} \cdot d\vec{\mathbf{A}} = \int_a^b \frac{\mu_0 Ni}{2\pi r} h dr = \frac{\mu_0 N i h}{2\pi} \ln(b/a) \quad (1.47)$$

$$\boxed{L = \frac{N\Phi_B}{i} = \frac{\mu_0 N^2 h}{2\pi} \ln(b/a)} \quad (1.48)$$

1.8 LR Circuit

This is the analog of the RC circuit we studied. Consider a battery V , switch S , resistor R , and inductor L in series. Switch S can be moved to either contact a (charging) or b (discharging).

1.8.1 Charging (Switch to a)

Apply Kirchhoff's voltage law:

$$V - iR - L \frac{di}{dt} = 0 \implies \frac{di}{dt} + \frac{i}{(L/R)} = \frac{V}{L} \quad (1.49)$$

(Here $V_L = L di/dt$ and $V_R = iR$.) Rewriting,

$$\frac{di}{dt} + \frac{i}{\tau_L} = \frac{V}{L}, \quad \tau_L \equiv \frac{L}{R} = \text{inductive time constant} \quad (1.50)$$

L/R has units of time (s). The solution is

$$\boxed{i(t) = \frac{V}{R} \left(1 - e^{-t/\tau_L}\right)} \quad (1.51)$$

In analogy to the RC circuit. The current rises asymptotically to V/R with time constant $\tau_L = L/R$.

1.8.2 Discharging the LR Circuit (Switch to b after a long time)

After a long time, the current is V/R . Now move S to b (battery disconnected, loop has only L and R):

$$-iR - L \frac{di}{dt} = 0 \implies \frac{di}{dt} + \frac{i}{L/R} = 0 \quad (1.52)$$

$$\boxed{i(t) = \frac{V}{R} e^{-t/\tau_L}, \quad \tau_L = L/R} \quad (1.53)$$

The current decays exponentially.

1.8.3 What is going on physically?

Charging case: As i increased, the inductor produces an EMF to oppose the change in i and the change in Φ_B through its coils.

Loop equation:

$$L \frac{di}{dt} = V_L > 0, \quad V - iR - V_L = 0, \quad i = \frac{V - V_L}{R} \quad (1.54)$$

But V_L is not constant like a battery — it depends on di/dt . Initially $V_L = V$ (no current can flow yet), and finally $V_L \rightarrow 0$ (steady state, current V/R).

Discharging case:

$$-iR - L \frac{di}{dt} = 0, \quad \text{but } -L \frac{di}{dt} > 0 \implies \frac{di}{dt} < 0 \quad (1.55)$$

So if we define $V_L = -L di/dt$, we see that the inductor acts to maintain current in the circuit.

Polarity convention

Some books show the inductor with an EMF arrow:

- In the **charging case**: $\uparrow \mathcal{E}_L$ (EMF produces an E-field to oppose the increase in current)
- In the **discharging case**: $\downarrow \mathcal{E}_L$ (EMF produces an E-field to oppose the decrease in i)

$$\mathcal{E}_L = L \frac{di}{dt} \quad (1.56)$$

The instructor's preferred picture: Think of it as a potential with the polarities as though a time-dependent battery were acting. In the discharging case the current cannot persist — it is dissipated in Joule $i^2 R$ loss in the resistor, and in loss of energy stored in the B-field of the inductor.

1.9 Energy Stored in an Inductor

Just as the E-field stores energy in a capacitor, the B-field stores energy in an inductor.

Consider $V = iR + L di/dt$. Multiply through by i :

$$Vi = i^2 R + Li \frac{di}{dt} \quad (1.57)$$

We know Vi is the power associated with current i driven by potential V . i^2R is the Joule heating loss in resistor R . But there is an extra term $Li di/dt$. We interpret this as the part of the power going into the inductor — it is stored there.

The associated energy U_B is obtained as

$$\frac{dU_B}{dt} = Li \frac{di}{dt} \implies \int dU_B = \int Li \frac{di}{dt} dt = \int Li di \quad (1.58)$$

$$\boxed{U_B = \frac{1}{2} Li^2} \quad (1.59)$$

In analogy to $U_E = \frac{1}{2} q^2/C$.

1.10 Energy Density and the B-field

For a solenoid, the energy is distributed through the volume associated with the B-field, namely $A\ell$. Then the energy density in the B-field is

$$u_B \equiv \frac{U_B}{A\ell} = \frac{\frac{1}{2} Li^2}{A\ell} \quad (1.60)$$

For the solenoid $L = \mu_0 n^2 \ell A$, so

$$u_B = \frac{1}{2} \frac{\mu_0 n^2 \ell A i^2}{\ell A} = \frac{1}{2\mu_0} (\mu_0 n i)^2 = \frac{B^2}{2\mu_0} \quad (1.61)$$

$$\boxed{u_B = \frac{B^2}{2\mu_0}} \quad (1.62)$$

In analogy to the capacitor where $u_E = \frac{1}{2} \epsilon_0 E^2$.

1.11 Coaxial Cable

Central conductor of radius a carrying current i , outer conductor of radius b carrying return current i . *What is the energy stored in a cable of length ℓ , and what is the inductance L ?*

B-field via Ampère's Law

At radius r (with $a < r < b$):

$$\oint \vec{B} \cdot d\vec{\ell} = \mu_0 i_{\text{enc}} = \mu_0 i \implies B(2\pi r) = \mu_0 i \quad (1.63)$$

$$B(r) = \frac{\mu_0 i}{2\pi r} \quad (1.64)$$

(Not surprising — this is the same as a long straight wire.)

Energy stored

Using $u_B = B^2/(2\mu_0)$:

$$U_B = \frac{1}{2\mu_0} \int_V B^2 dV \quad (1.65)$$

We need to integrate B^2 over the entire volume of the cable. Use cylindrical shells $dV = 2\pi r dr \ell$:

$$U_B = \frac{1}{2\mu_0} \int_a^b \left(\frac{\mu_0 i}{2\pi r} \right)^2 2\pi r dr \ell \quad (1.66)$$

$$U_B = \frac{\mu_0 i^2 \ell}{4\pi} \int_a^b \frac{dr}{r} \quad (1.67)$$

$$U_B = \frac{\mu_0 i^2 \ell}{4\pi} \ln(b/a)$$

(1.68)

Inductance via energy

Calculating U_B and getting L from it is often handy because

$$U_B = \frac{1}{2} L i^2 = \frac{\mu_0 i^2 \ell}{4\pi} \ln(b/a) \quad (1.69)$$

$$L = \frac{\mu_0 \ell}{2\pi} \ln(b/a)$$

(1.70)

This is the inductance of a coaxial cable of length ℓ .

Lecture Pages (Unit 9)


Faraday's Law of Induction Unit 9

An EMF, $\mathcal{E}$, will be induced in a circuit equal to the negative rate of change of magnetic flux through the circuit.

$$\mathcal{E} = -\frac{d}{dt} \Phi_B ; \quad \Phi_B = \int \vec{B} \cdot \hat{n} dA$$

If the circuit is a coil of N turns, then

$$\mathcal{E} = -N \frac{d\Phi_B}{dt} = -\frac{d}{dt} (N\Phi_B) \quad N\Phi_B \equiv \text{flux linkage}$$

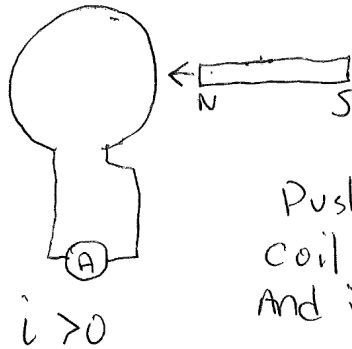


Pushing magnet into the coil changes the flux Φ_B , and induce a current

What is the direction of i ?


Lenz's Law: The induced current will be in the direction that opposes the changing flux in the circuit.

Figure 1.1: *
Unit 9, page 01



← direction of induced current


2 ways to think about it, 1.) The induced current is producing a magnetic dipole moment that effectively looks like a magnet like



and so the N-N repel each other (resisting motion of magnet into loop)

2.) The induced current produces a B-field like
 ↓ And this reduces the ↑ B-field of the magnet, and thus the flux penetrating the loop.

If you pull the magnet away then

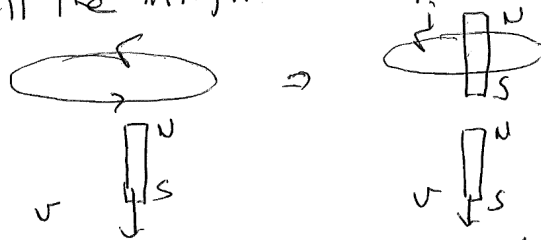


The induced current attracts the magnet
 And the induced B-field adds to the flux in the loop (to help it persist)

Figure 1.2: *
 Unit 9, page 02

Induction : Quantitative

Loop in uniform B-field

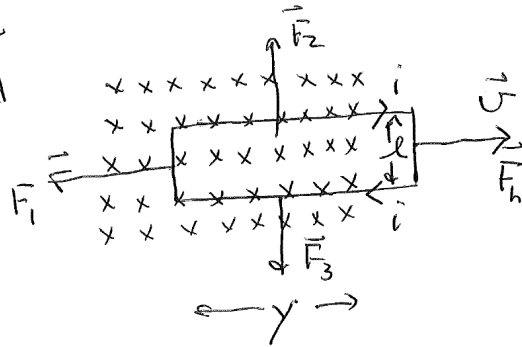

y = length of loop in B-field

l = width of loop

F_h = force pulling wire loop out of B-field at speed v (due to a "hand")

i = induced current in loop.

$$\text{Flux in loop} = \int \vec{B} \cdot \hat{n} dA = Bly; \quad \frac{d\phi_B}{dt} = Bl \frac{dy}{dt} = Blv$$

$$-\frac{d\phi_B}{dt} = \mathcal{E} = Blv \quad (\text{the } - \text{ sign just reminds us to set current direction by Lenz's Law})$$

For loop resistance R

$$i = \mathcal{E}/R = \frac{Blv}{R} \quad \left[\begin{array}{l} \text{the direction of current} \\ \text{shown adds flux as it} \\ \text{is being reduced by motion} \\ \text{out of B-field} \end{array} \right]$$

Analysis of Forces:

$$\vec{F}_2 = i \vec{y} \times \vec{B} = iyB \text{ upward} \quad > R_H R$$

$$\vec{F}_3 = i \vec{y} \times \vec{B} = iyB \text{ downward}$$

$$\vec{F}_2 + \vec{F}_3 = 0$$

Figure 1.3: *
Unit 9, page 03

$$\vec{F}_i = -i\ell B \hat{y} ; \vec{F}_h = i\ell B \hat{y}$$

Because $F_y = \vec{F}_i + \vec{F}_h = 0 \Rightarrow a_y = 0 \Rightarrow v = \text{constant}$


The hand must do work against $\vec{F}_i$ (induced by i)
of an amount $F_h v = i\ell B v = \left(\frac{B\ell v}{R}\right)\ell B v = B^2 \frac{\ell^2 v^2}{R}$

This is work per unit time the hand does to maintain a steady v .

Power dissipated in the loop due to current i is

$$P_R = i^2 R = B^2 \ell^2 \frac{v^2}{R} \Rightarrow P_R = F_h v \Rightarrow \text{we have converted mechanical energy into electrical energy}$$

Concept check:

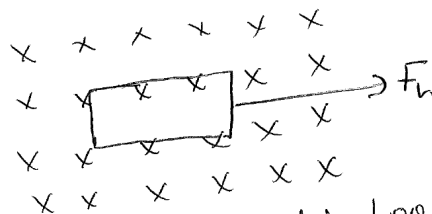

what is current induced in this loop?

$i = 0$ because the flux Φ_B is not changing

$$\text{so } \mathcal{E} = -d\Phi_B/dt = 0 \Rightarrow \mathcal{E}/R = 0$$


Time-Varying B-field:

We previously saw we got an EMF when a loop moved in a constant B-field because Φ_B changed. We can also change a flux Φ_B by varying the B in $\int \vec{B} \cdot \hat{n} dA$

Figure 1.4: *
Unit 9, page 04

Experimentally we find that An EMF develops when $\frac{dB}{dt} \neq 0$ even when There is no circuit. The EMF is ASSOCIATED with an induced E-field

$$-\frac{d\phi_B}{dt} = \mathcal{E} = \oint \vec{E} \cdot d\vec{\ell}$$

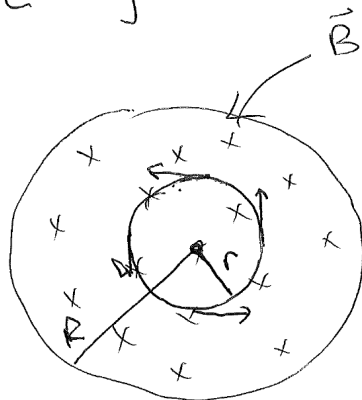

$$\frac{dB}{dt} > 0$$

$$\uparrow = \vec{E}$$

As $\frac{dB}{dt} > 0$, An E-field develops at r even though There is no circuit. The direction of $\vec{E}$ is the same as would be required to drive An induction current at r . The direction of $\vec{E}$ is determined by symmetry.

$$\mathcal{E} = -\frac{d\phi_B}{dt} = -\pi r^2 \frac{dB}{dt} \quad r < R$$

~~The~~ If there were An induction current, it would be driven by An $\vec{E}$ as shown, to oppose the increasing flux in the loop.

$$\mathcal{E} = \oint_C \vec{E} \cdot d\vec{\ell} = E 2\pi r = -\pi R^2 \frac{dB}{dt}$$

Figure 1.5: *
Unit 9, page 05

$$r < R \quad E(r) = -\frac{r}{2} \frac{dB}{dt} \quad \text{This E-field permeates}$$

All space at $r < R$.

$$r > R \quad \text{Here } \phi_B = \int \vec{B} \cdot \hat{n} dA = B\pi R^2; \quad \phi_B = \pi R^2 \frac{dB}{dt}$$

$$-\mathcal{E} = \oint \vec{E} \cdot d\vec{\ell} = -E 2\pi r = \pi R^2 \frac{dB}{dt}$$

$$E(r) = -\frac{R^2}{2r} \frac{dB}{dt} \quad [\text{drops like } 1/r]$$

Note the $-$ sign is just a reminder of Lenz's Law

Important : E-fields generated by time-varying B-fields do not have to begin and end on charges. They can form closed loops.

$$\text{Electrostatics: } V_b - V_a = -\int_a^b \vec{E} \cdot d\vec{\ell}$$

$$\text{In a closed loop, } b=a \Rightarrow \oint_c \vec{E} \cdot d\vec{\ell} = 0$$

$$\frac{dB}{dt} \neq 0; \quad \oint_c \vec{E} \cdot d\vec{\ell} = -\frac{d\phi_B}{dt} = -\frac{dB}{dt} A$$

Figure 1.6: *
Unit 9, page 06

Maxwell's Equations: We are getting close


$$\oint_S \vec{E} \cdot \hat{n} dA = \frac{q_{enc}}{\epsilon_0} ; \oint_C \vec{E} \cdot d\vec{\ell} = \mathcal{E} = -\frac{d}{dt} \int_S \vec{B} \cdot \hat{n} dA$$

$$\oint_S \vec{B} \cdot \hat{n} dA = 0$$

$$\oint_C \vec{B} \cdot d\vec{\ell} = \mu_0 i_{enclosed} + \left(\begin{array}{c} ? \\ \uparrow \text{something still} \\ \text{missing} \end{array} \right)$$

Important Examples:

~~Electric~~ Electric Power Generator

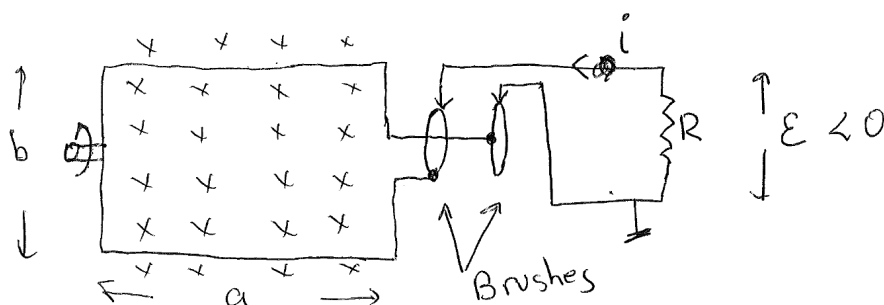

Rotate N coils at frequency ν

$$\Phi_B = N \int \vec{B} \cdot d\vec{A} = N B a b \cos 2\pi \nu t$$

$$\mathcal{E} = N B a b \frac{d}{dt} \cos 2\pi \nu t = N B a b 2\pi \nu \sin 2\pi \nu t$$


$$\mathcal{E} = \mathcal{E}_0 \sin 2\pi \nu t ; \mathcal{E}_0 = N B a b 2\pi \nu$$

$$i = \mathcal{E}/R$$

Figure 1.7: *
Unit 9, page 07

As the coil rotates the current will 1st be as shown. Measured with respect to ground, $\mathcal{E} < 0$. This is because the flux through the coil is decreasing. A $\frac{1}{2}$ cycle later the flux is increasing and the current must change direction. Now $\mathcal{E} > 0$. The brushes have movable contact points $\bullet$ $\odot$ to accommodate the changing current direction.

Eddy Currents :

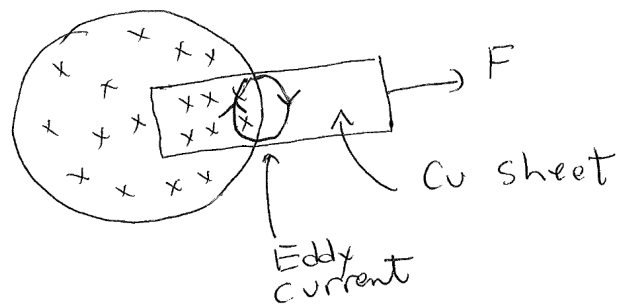

As the Cu sheet is pulled out of the B-field the flux through the Cu sheet decreases.


1.) A CW eddy current forms whose magnetic dipole is into the page to oppose the decrease in Φ_B (by adding B-field to it)

2.) The piece of the eddy current in the B-field has an $i\vec{l} \times \vec{B}$ that produces a leftward force, that opposes the ~~removal~~ removal of the Cu sheet.

Both are examples of Lenz's Law at work

Figure 1.8: *
Unit 9, page 08

Electromagnetic Shielding

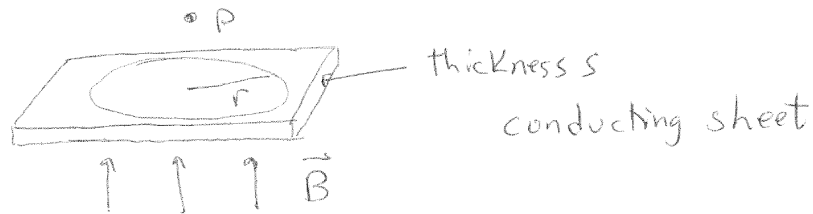

$dB/dt > 0 \Rightarrow$ CW current in sheet

$dB/dt < 0 \Rightarrow$ CCW current in sheet

$$\mathcal{E} = \frac{d}{dt} \int B dA = \pi r^2 \frac{dB}{dt} = \oint \vec{E} \cdot d\vec{\ell} = E 2\pi r$$

$$E = \frac{r}{2} \frac{dB}{dt} ; j = \sigma E = \frac{\sigma}{2} r \frac{dB}{dt}$$

This is current density induced in sheet

$$di = j dA = j s dr \quad \text{The induced current}$$

is moving in a cross-section dr

$$di = \frac{\sigma s}{2} r dr \frac{dB}{dt}$$

For a current loop B at the center is


$$dB = \frac{\mu_0 di}{2r} = \frac{1}{4} \sigma s \frac{dB}{dt} \mu_0 dr$$

$$B_0 = \text{shielding B-field} = \int dB = \frac{1}{4} \sigma s \mu_0 R \frac{dB}{dt}$$

For dB/dt changing rapidly i.e. $\frac{dB}{dt} \gg 0$ i.e. high frequency, then B_0 will be large and oppose the external B so $B(P) \approx 0$

Figure 1.9: *
Unit 9, page 09

Inductance :


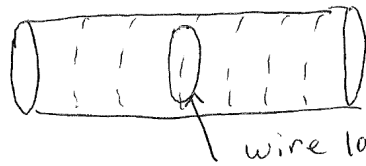


$$B = \mu_0 n i$$

$$\frac{dB}{dt} = \mu_0 n \frac{di}{dt}$$

change current in solenoid $\Rightarrow$ change B
in loop $\Rightarrow$ induced EMF. This is induction

Self-induction :



When a current changes in the solenoid, an EMF appears across the solenoid. This is the self-inductance.

$$\mathcal{E} = -\frac{d}{dt}(N\phi_B) ; N\phi_B = \text{number of flux linkages}$$

For a given solenoid or any shaped coil, the number of flux linkages is proportional to i , the current, i.e. $N\phi_B = Li$ where L , the inductance, is the proportionality constant.



$$\mathcal{E} = -\frac{d}{dt}(N\phi_B) = -L \frac{di}{dt} \quad \text{or}$$

$$L = -\mathcal{E} / \frac{di}{dt}$$


Figure 1.10: *
Unit 9, page 10

For any geometry: - simple coil, solenoid, torus ...
 As long as there is a current there is a
 B-field and a self-inductance

Notice the analogy to capacitance

 parallel plates $\Rightarrow$ Any geometry of conductors $\Rightarrow$  C
 Abstracted to symbol in circuit
 $C = q/V$

inductance

 coil $\Rightarrow$ Any geometry with current flow/B-field $\Rightarrow$  L
 Abstracted to symbol in circuit


$$L = -\mathcal{E} / di/dt$$

Unit of L $\frac{[Volt]}{[A/s]} \equiv [L] = \text{Henry (H)}$

$1 \frac{Volt \cdot s}{A} = 1 \text{ Henry (1H)}$ SI unit

Calculating Inductance:

Solenoid:



$\rightarrow B$

$$B = \mu_0 n i$$

$$N = n l$$


$$N \Phi_B = n l B A$$

A = Area of 1 loop

Figure 1.11: *
 Unit 9, page 11

$$N\Phi_B = n\ell A(\mu_0 n i) = \mu_0 n^2 \ell A i$$

$$L = N\Phi_B / i = \mu_0 n^2 \ell A \quad (\text{inductance of solenoid})$$

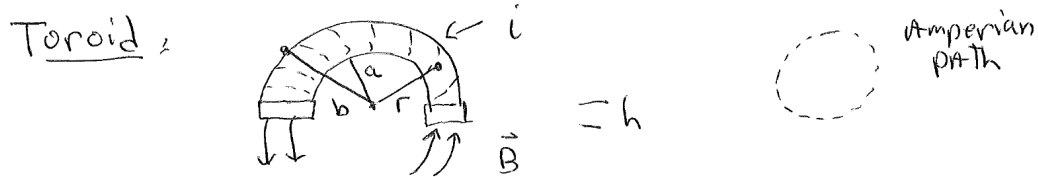


$$\oint \vec{B} \cdot d\vec{\ell} = \mu_0 i_{\text{enclosed}} ; \quad B 2\pi r = \mu_0 N i$$

$$B(r) = \frac{\mu_0 N i}{2\pi r}$$

$$\Phi_B = \int \vec{B} \cdot d\vec{A} = \int_a^b \frac{\mu_0 N i}{2\pi r} \underbrace{h dr}_{dA} = \frac{\mu_0 N i h \ln(b/a)}{2\pi}$$

$$L = \frac{N\Phi_B}{i} = \frac{\mu_0 N^2 h \ln(b/a)}{2\pi}$$

LR Circuit: This is the analog of the RC circuit we studied

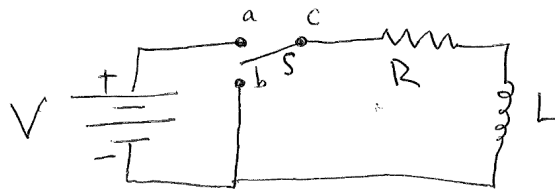

close switch S to contact a

$$V - iR - L \frac{di}{dt} = 0$$

$$\frac{di}{dt} + \frac{i}{L/R} = \frac{V}{L/R}$$

$$V_L = L \frac{di}{dt}$$

$$V_R = iR$$


Figure 1.12: *
Unit 9, page 12

$$\frac{di}{dt} + \frac{i}{(L/R)} = V ; \frac{L}{R} \text{ has units of time [s]} \\ \equiv \tau_L = \text{inductive time constant}$$

$$i(t) = \frac{V}{R}(1 - e^{-t/\tau_L})$$

in analogy to the RC circuit where $\frac{dq}{dt} + \frac{q}{\tau_C} = V$

$$q(t) = \frac{V}{R}(1 - e^{-t/\tau})$$

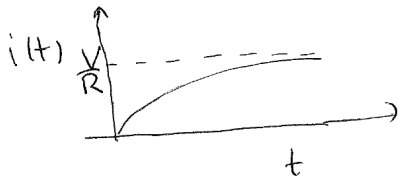

Discharging the LR circuit:

Move S to b after a long time

$$\Rightarrow -iR - L \frac{di}{dt} = 0 ; \frac{di}{dt} + \frac{i}{L/R} = 0$$

$$\Rightarrow i(t) = \frac{V}{R} e^{-t/\tau_L} ; \tau_L = L/R$$


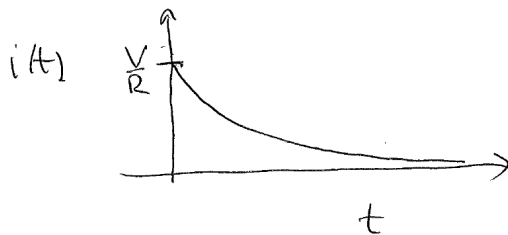


Figure 1.13: *
Unit 9, page 13

What is going on physically?

As i increased, the inductor produces an EMF to oppose the change in i and the change in Φ_B through its coils.

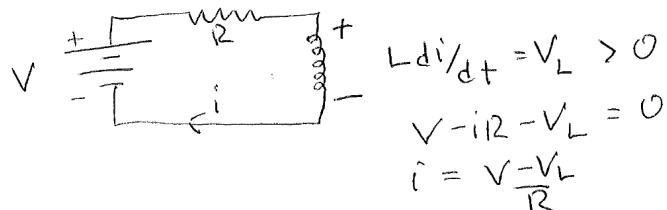

But V_L is not constant like a battery, but the EMF on the coil is as above.


Discharging L-R circuit:



$$-iR - L \frac{di}{dt} = 0 \text{ but } -L \frac{di}{dt} > 0 \quad \frac{di}{dt} < 0$$


So if we define $V_L = -L \frac{di}{dt}$ we see that the inductor acts to maintain current in the circuit.

Some books show this as



first charging case, since the EMF produces an E-field like shown to oppose the increase in current

In the discharge case, they would show



since the EMF would produce an E-field to ~~oppose~~ oppose the decrease in i .

$$\mathcal{E}_L = L \frac{di}{dt}$$

Figure 1.14: *
Unit 9, page 14

I prefer to think of it as a potential with the polarities as though a time-dependent battery were acting.

Note in the discharging case the current cannot persist. It is dissipated in joule $i^2 R$ loss in the resistor, and in loss of energy in the B-field in the inductor.

Energy in the inductor: just as the E-field stored energy in the capacitor, the B-field stores energy in the inductor. Consider

$$V = iR + L di/dt ; \quad V_i = i^2 R + L i di/dt$$

We know V_i is the power associated with current i driven by potential V . $i^2 R$ is the joule heating loss in resistor R . But there is an extra term $L i di/dt$.

We interpret this as the part of the power in the circuit in the inductor. It is stored there. The associated energy U_B can be obtained as

$$\frac{dU_B}{dt} = L i \frac{di}{dt} ; \quad \int dU_B = \int L i \frac{di}{dt} dt = \int L i di$$

$$\Rightarrow U_B = \frac{1}{2} L i^2 \quad \text{in analogy to } U_E = \frac{1}{2} q^2 / C$$

Energy Density And B-field

For the solenoid, the energy is distributed through the volume associated with the B-field, namely Al




Figure 1.15: *
Unit 9, page 15

Then the energy density in the B-field is

$$u_B \equiv U_B / Al = \frac{1}{2} \frac{L i^2}{Al}$$

But for the solenoid $L = \mu_0 n^2 l A$

$$\Rightarrow u_B = \frac{1}{2} \frac{\mu_0 n^2 l A i^2}{l A} = \frac{1}{2} (\mu_0 n i)^2 = \frac{B^2}{2\mu_0}$$

$\Rightarrow u_B = \text{energy density} = \frac{B^2}{2\mu_0}$ in analogy to the capacitor where $u_E = \frac{1}{2} \epsilon_0 E^2$

Coaxial Cable :

central conductor radius a carrying current i
outer conductor radius b carrying return current i

what are energy stored in cable of length l
And the inductance L ?

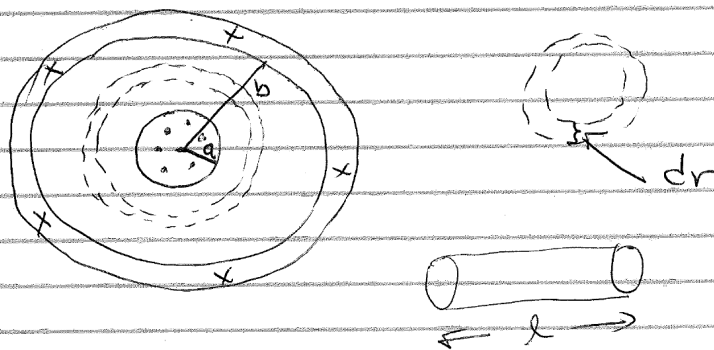


Figure 1.16: *
Unit 9, page 16

At radius r , we have by Ampere's Law

$$\oint_C \vec{B} \cdot d\vec{\ell} = \mu_0 i_{enc} = \mu_0 i$$

$$B 2\pi r = \mu_0 i \quad B(r) = \frac{\mu_0 i}{2\pi r} \quad \text{not surprising}$$

$$u_B = \frac{1}{2\mu_0} B^2; \quad U_B = \frac{1}{2\mu_0} \int_V B^2 dV$$

We need to integrate B^2 over the entire volume of the cable

$$dV = 2\pi r dr l \Rightarrow U_B = \frac{1}{2\mu_0} \int_a^b \left(\frac{\mu_0 i}{2\pi r} \right)^2 2\pi r dr l$$

$$U_B = \frac{\mu_0 i^2 l}{4\pi} \int_a^b \frac{dr}{r} \Rightarrow U_B = \frac{\mu_0 i^2 l}{4\pi} \ln b/a$$

⊙ Calculating U_B and getting L from it is often handy because

$$U_B = \frac{1}{2} L i^2 = \frac{\mu_0 i^2 l}{4\pi} \ln b/a$$

$$\Rightarrow L = \frac{\mu_0 l}{2\pi} \ln(b/a)$$

Figure 1.17: *
Unit 9, page 17

Chapter 2

Electromagnetic Oscillations

2.1 LC Oscillators

2.1.1 Quantitative Analysis

Consider an ideal LC circuit: an inductor L in series with a capacitor C (no resistance). The total energy in the circuit is

$$E = \underbrace{\frac{1}{2}Li^2}_{\text{energy in B-field}} + \underbrace{\frac{q^2}{2C}}_{\text{energy in E-field}} \quad (2.1)$$

Since there is no resistance, energy is conserved:

$$\frac{dE}{dt} = 0 = Li \frac{di}{dt} + \frac{q}{C} \frac{dq}{dt} \quad (2.2)$$

Using $i = dq/dt$ and $di/dt = d^2q/dt^2$:

$$L \frac{dq}{dt} \frac{d^2q}{dt^2} + \frac{q}{C} \frac{dq}{dt} = 0 \quad (2.3)$$

Dividing by $L dq/dt$:

$$\boxed{\frac{d^2q}{dt^2} + \frac{q}{LC} = 0 \quad \text{i.e.} \quad \ddot{q} = -\frac{1}{LC}q} \quad (2.4)$$

2.1.2 Analogy to the Simple Harmonic Oscillator

The equation of motion of a simple harmonic oscillator (mass on a spring) is

$$\ddot{x} = -\frac{k}{m}x \quad (2.5)$$

These are mathematically the *same equation*. Recall the solution to the SHO is

$$x(t) = x_0 \cos(\omega t + \phi), \quad \omega^2 = \frac{k}{m} \quad (2.6)$$

So the solution to $\ddot{q} = -\frac{1}{LC}q$ is

$$\boxed{q(t) = q_0 \cos(\omega t + \phi), \quad \omega^2 = \frac{1}{LC}} \quad (2.7)$$

The LC circuit oscillates with natural frequency

$$\boxed{\nu = \frac{1}{2\pi\sqrt{LC}}, \quad \omega = 2\pi\nu} \quad (2.8)$$

2.1.3 Setting the Phase from Initial Conditions

ϕ is set by the initial conditions. If at $t = 0$, $q = q_0$ (i.e., the capacitor is fully charged and $i = 0$), then $\phi = 0$:

$$q = q_0 \cos \omega t = q_0 \quad (t = 0) \quad (2.9)$$

$$i = \frac{dq}{dt} = -\omega q_0 \sin \omega t = 0 \quad (t = 0) \quad (2.10)$$

2.1.4 Energy of the Oscillator

The total energy is $E = U_B + U_E$:

$$U_B = \frac{1}{2} Li^2 = \frac{1}{2} L \dot{q}^2 = \frac{1}{2} L q_0^2 \omega^2 \sin^2 \omega t \quad (2.11)$$

$$U_E = \frac{q^2}{2C} = \frac{q_0^2}{2C} \cos^2 \omega t \quad (2.12)$$

Note that $\frac{1}{2} L \omega^2 q_0^2 \sin^2 \omega t = \frac{q_0^2}{2C} \sin^2 \omega t$ since $\omega^2 = 1/LC$. Therefore:

$$E = \frac{1}{2} L \omega^2 q_0^2 \sin^2 \omega t + \frac{q_0^2}{2C} \cos^2 \omega t \quad (2.13)$$

$$= \frac{q_0^2}{2C} \sin^2 \omega t + \frac{q_0^2}{2C} \cos^2 \omega t \quad (2.14)$$

$$= \frac{q_0^2}{2C} \quad (2.15)$$

So the total energy is constant:

$$\boxed{E = \frac{1}{2} \frac{q_0^2}{C} = \frac{1}{2} C V_{\max}^2} \quad (2.16)$$

where we used $q_0/C = V_{\max}$. The energy continually sloshes between the capacitor's E-field and the inductor's B-field, but the sum is fixed.

Stages of an LC Cycle (Conceptual Picture)

In an LC oscillation, the energy moves through eight characteristic stages in each full cycle (analogous to the 8 stages of a mass-on-spring):

- **(a)** Capacitor fully charged, $i = 0$, all energy in E-field.
- **(b)** Capacitor discharging, current building, energy splitting between E-field and B-field.
- **(c)** Capacitor fully discharged, current at maximum, all energy in B-field.
- **(d)** Current still flowing in same direction, charging the capacitor with opposite polarity.
- **(e)** Capacitor fully charged with reversed polarity, $i = 0$, all energy in E-field.
- **(f)–(h)** The cycle proceeds in reverse, returning to (a).

The bar graphs of U_B and U_E trade height back and forth, and their sum is constant.

2.1.5 Worked Example: Oscillating LC circuit, $L = 10 \text{ mH}$, $C = 1 \mu\text{F}$

(a) What is the frequency of oscillation?

$$\omega = \frac{1}{\sqrt{LC}} = \left[\frac{1}{(10 \times 10^{-3} \text{ H})(1 \times 10^{-6} \text{ F})} \right]^{1/2} = 10^4 \text{ rad/s} \quad (2.17)$$

$$\nu = \frac{\omega}{2\pi} = 1.6 \times 10^3 \text{ cycles/s} = 1600 \text{ Hz} \quad (2.18)$$

(b) If the maximum voltage on the capacitor is 100 V, calculate the maximum current in the inductor.

From $q = q_0 \cos \omega t$ we get $dq/dt = i = -\omega q_0 \sin \omega t$, so $i_{\max} = \omega q_0$. Using $q_0 = CV_{\max}$:

$$i_{\max} = \omega CV_{\max} = (10^4 \text{ rad/s})(10^{-6} \text{ F})(100 \text{ V}) = 1 \text{ A} \quad (2.19)$$

2.2 Induced B-fields

Experimentally we observe that a changing E-field produces a B-field, just as a changing B-field produces an E-field.

Setup: Capacitor with Variable Voltage

Consider a parallel-plate capacitor connected to a battery whose voltage V is being increased ($dE/dt > 0$). Steady current must flow to charge the + plate and push + charge off the – plate. **Experiment shows that a B-field is then set up** between the plates — even though no charges are moving across the gap.

Symmetry Picture (View from above the + plate)

If we view from above, with $\vec{E}$ pointing into the page (using $\times$ symbols) and increasing in time, the induced $\vec{B}$ -field forms closed loops in the plane of the figure, just as the induced E-field did when $dB/dt \neq 0$.

Note the symmetry with the case of $\vec{E}$ and $\vec{B}$ reversed. However:

Big difference: By Lenz's Law, the induced $\vec{E}$ would be CCW if the $\times$ were $\vec{B}$. *But in the reverse case where $\times$ is $\vec{E}$, the induced $\vec{B}$ is CW.* (The signs in the two laws turn out to be opposite. "Such is nature.")

2.2.1 Toward Maxwell's Fourth Equation

We had Faraday's Law:

$$\oint_C \vec{E} \cdot d\vec{\ell} = -\frac{d\Phi_B}{dt} \quad (2.20)$$

By analogy, we expect

$$\oint_C \vec{B} \cdot d\vec{\ell} = \alpha \frac{d\Phi_E}{dt} \quad (2.21)$$

where α is some constant to get the dimensions correct.

Dimensional Analysis to Find α

Take the ratio of the two laws:

$$\frac{\oint \vec{E} \cdot d\vec{\ell}}{\oint \vec{B} \cdot d\vec{\ell}} \sim \frac{d\Phi_B/dt}{\alpha d\Phi_E/dt} \implies \frac{E\ell}{B\ell} \sim \frac{BA/t}{\alpha EA/t} \quad (2.22)$$

$$\implies \left(\frac{E}{B}\right)^2 = \frac{1}{\alpha} \quad (2.23)$$

Now use $E \sim F/q$ and $B \sim F/(i\ell)$:

$$\left(\frac{E}{B}\right)^2 \sim \frac{(F/q)^2}{(F/i\ell)^2} = \frac{i^2\ell^2}{q^2} \sim \frac{q^2\ell^2}{t^2q^2} = \frac{\ell^2}{t^2} \quad (2.24)$$

So

$$\alpha \sim \left(\frac{\ell^2}{t^2}\right)^{-1} \sim \frac{1}{v^2} \quad (2.25)$$

i.e., α has the dimensions of inverse velocity squared. **The natural value of α is $\mu_0\varepsilon_0$** , because this combination has SI units of $1/(\text{m}^2/\text{s}^2)$. Therefore:

$$\boxed{\oint_C \vec{E} \cdot d\vec{\ell} = -\frac{d\Phi_B}{dt}, \quad \oint_C \vec{B} \cdot d\vec{\ell} = \mu_0\varepsilon_0 \frac{d\Phi_E}{dt}} \quad (2.26)$$

Speed of Light Emerges

We are clearly on to something profound, because

$$\frac{1}{\sqrt{\mu_0\varepsilon_0}} = \left[\frac{1}{(4\pi \times 10^{-7})(8.85 \times 10^{-12})} \right]^{1/2} = 3 \times 10^8 \text{ m/s} \quad (2.27)$$

The speed of light is $c = 3 \times 10^8 \text{ m/s}$, so

$$\boxed{c = \frac{1}{\sqrt{\mu_0\varepsilon_0}}} \quad (2.28)$$

We have connected the speed of light to quantities purely associated with E-fields and B-fields. This is the foundation of electromagnetic waves.

2.3 Displacement Current

We had Ampère's Law for magnetostatics:

$$\oint_C \vec{B} \cdot d\vec{\ell} = \mu_0 i \quad (2.29)$$

To generalize, we can consider $\oint \vec{B} \cdot d\vec{\ell}$ arising from *either* currents i *or* E-field variation $d\Phi_E/dt$. We can generalize Ampère's Law by defining the **displacement current**:

$$\boxed{i_d \equiv \varepsilon_0 \frac{d\Phi_E}{dt}} \quad (2.30)$$

so that

$$\boxed{\oint_C \vec{B} \cdot d\vec{\ell} = \mu_0(i + i_d) = \mu_0 i + \mu_0\varepsilon_0 \frac{d\Phi_E}{dt}} \quad (2.31)$$

Why the displacement current matters: continuity of current

Conduction current i is *not continuous* across the gap in capacitor plates. If we draw a closed path around one wire and use any surface bounded by it, we get different answers depending on whether the surface passes through the wire (which carries current) or threads between the capacitor plates (where no charges flow).

But dE/dt between the plates is exactly what is needed to fix this. With surface charge density $\sigma = q/A$ on the plates:

$$E = \frac{\sigma}{\varepsilon_0} = \frac{q}{\varepsilon_0 A}, \quad \frac{dE}{dt} = \frac{1}{\varepsilon_0 A} \frac{dq}{dt} = \frac{i}{\varepsilon_0 A} \quad (2.32)$$

Therefore

$$i_d = \varepsilon_0 \frac{d\Phi_E}{dt} = \varepsilon_0 \frac{d}{dt}(EA) = \varepsilon_0 A \frac{dE}{dt} = i \quad (2.33)$$

So the displacement current i_d between the plates equals the conduction current i in the wire.

The General Picture

The displacement current gives us a physical picture where there is *continuity of current through the gap*. The conduction current i in the wire becomes a displacement current i_d between the plates, with $i = i_d$.

2.4 Maxwell's Equations

We now have all four:

$$\oint_S \vec{\mathbf{E}} \cdot \hat{n} dA = \frac{q_{\text{enc}}}{\varepsilon_0} \quad (\text{Gauss's Law for E}) \quad (2.34)$$

$$\oint_S \vec{\mathbf{B}} \cdot \hat{n} dA = 0 \quad (\text{Gauss's Law for B}) \quad (2.35)$$

$$\oint_C \vec{\mathbf{B}} \cdot d\vec{\ell} = \mu_0 \left(i + \varepsilon_0 \frac{d\Phi_E}{dt} \right) \quad (\text{Ampère–Maxwell Law}) \quad (2.36)$$

$$\oint_C \vec{\mathbf{E}} \cdot d\vec{\ell} = -\frac{d\Phi_B}{dt} \quad (\text{Faraday's Law}) \quad (2.37)$$


This is a complete classical description of electromagnetism. Together with the Lorentz force law $\vec{\mathbf{F}} = q\vec{\mathbf{E}} + q\vec{\mathbf{v}} \times \vec{\mathbf{B}}$, these equations describe all classical E&M phenomena — including the existence and propagation of electromagnetic waves at speed $c = 1/\sqrt{\mu_0\varepsilon_0}$.

Lecture Pages (Unit 10)

Unit 10: Electromagnetic Oscillations

LC Oscillators:

Quantitative:



$$E = \frac{1}{2} L i^2 + \frac{q^2}{2C}$$

$\uparrow$ energy in B-field $\uparrow$ energy in E-field

conservation of energy

$$\frac{dE}{dt} = 0 = L i \frac{di}{dt} + \frac{q}{C} \frac{dq}{dt}$$

$$\Rightarrow \frac{d^2 q}{dt^2} + \frac{q}{LC} = 0$$

$$\ddot{q} + q/LC = 0 \Rightarrow \ddot{q} = -\frac{1}{LC} q$$

$$i = \frac{dq}{dt}$$

$$\frac{di}{dt} = \frac{d^2 q}{dt^2}$$

Simple Harmonic Oscillator: $\ddot{x} = -K/m x$

These are mathematically the same equation

Recall solution the SHO is

$$x(t) = x_0 \cos(\omega t + \phi); \quad \omega^2 = K/m$$

Figure 2.1: *
Unit 10, page 1

From: Charles J. Hailey cjh26@columbia.edu
 Date: Mar 30, 2026 at 7:21:30PM
 To: Chuck chuckh@astro.columbia.edu

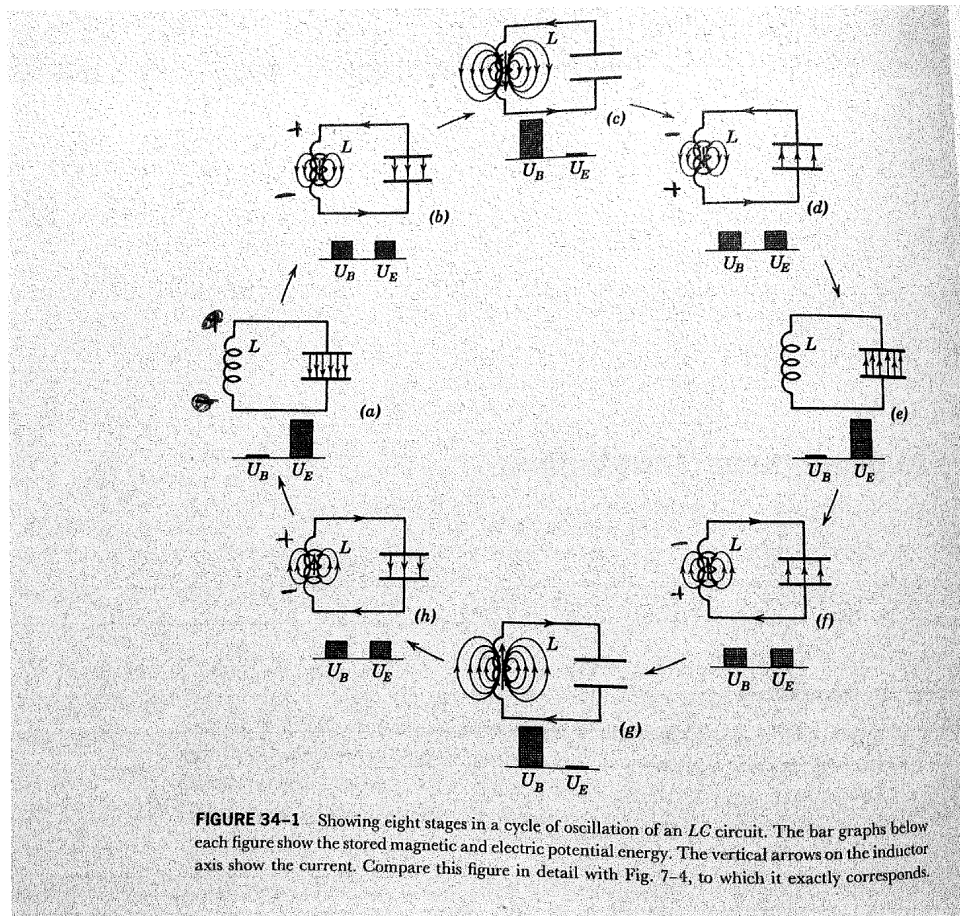


Figure 2.2: *
 Unit 10, page 2

So solution to $\ddot{q} = -\frac{1}{LC} q$ is

$$q = q_0 \cos(\omega t + \phi); \quad \omega^2 = \frac{1}{LC}$$

$\Rightarrow$ The LC circuit oscillates with natural frequency $\nu = \frac{1}{2\pi\sqrt{LC}}$; $\omega = 2\pi\nu$

ϕ is set by the initial conditions

If at $t=0$ $q = q_0$ (ie the capacitor is fully charged and $i=0$)

then $\phi=0$ $q = q_0 \cos \omega t = q_0$ ($t=0$)
 $i = \frac{dq}{dt} = -\omega q_0 \sin \omega t = 0$ ($t=0$)

The total energy is $E = U_B + U_E$

$$U_B = \frac{1}{2} Li^2 = \frac{1}{2} L \dot{q}^2 = \frac{1}{2} L q_0^2 \omega^2 \sin^2 \omega t$$

$$U_E = q^2/2C = \frac{q_0^2}{2C} \cos^2 \omega t$$

$$\frac{1}{2} L \omega^2 q_0^2 \sin^2 \omega t = \frac{q_0^2}{2C} \sin^2 \omega t \quad \text{since } \omega^2 = \frac{1}{LC}$$

$$E = \frac{1}{2} L \omega^2 q_0^2 \sin^2 \omega t + \frac{1}{2} \frac{q_0^2}{2C} \cos^2 \omega t$$

$$= \frac{1}{2} \frac{q_0^2}{C} \sin^2 \omega t + \frac{1}{2} \frac{q_0^2}{2C} \cos^2 \omega t$$

$$E = \frac{1}{2} \frac{q_0^2}{C}; \quad q_0/C = V_{\max} \Rightarrow E = \frac{1}{2} C V_{\max}^2$$

Figure 2.3: *
Unit 10, page 3

Oscillating LC circuit $L = 10 \text{ mH}$; $C = 1 \mu\text{F}$

a.) what is frequency of oscillation?

$$\omega = \frac{1}{\sqrt{LC}} = \left[\frac{1}{(10 \times 10^{-3} \text{ H})(1 \times 10^{-6} \text{ s})} \right]^{1/2} = 10^4 \text{ rad/s}$$

$$\nu = \frac{\omega}{2\pi} = 1.6 \times 10^3 \frac{\text{cycles}}{\text{s}} = 1600 \text{ Hz}$$

b.) If the max voltage on the capacitor is 100 V ,
calculate the max current in the inductor

$$q = q_0 \cos \omega t ; \frac{dq}{dt} = i = -\omega q_0 \sin \omega t$$

$$\Rightarrow i_{\text{max}} = \omega q_0 ; q_0 = C V_{\text{max}} \Rightarrow$$

$$i_{\text{max}} = \omega C V_{\text{max}} = 10^4 \frac{\text{rad}}{\text{s}} \times 10^{-6} \text{ F} \times 100 \text{ V} = 1 \text{ A}$$

Induced B-fields:

Experimentally we observe that a changing E-field
produces a B-field, just as a changing B-field
produces an E-field.

Capacitor Plates

battery with
variable voltage


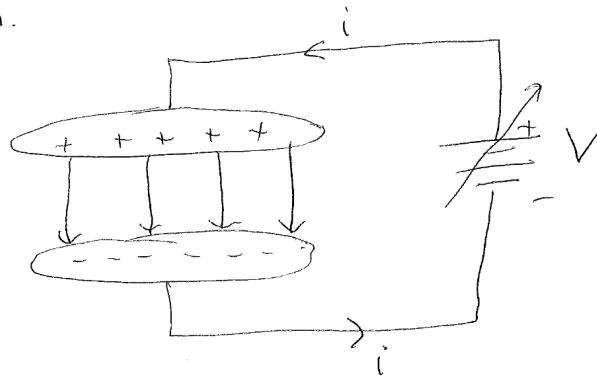


Figure 2.4: *
Unit 10, page 4

Assume $dE/dt > 0 \Rightarrow V$ increases $\Rightarrow$ steady current must flow to charge + plate and push + charge off - plate. Experiment shows A B-field is then set up

View from Above + plate



$x = \vec{E}$ -field

$\rightarrow = \vec{B}$ -field

$R =$ radius of plates

Note the symmetry with the case of $\vec{E}$ and $\vec{B}$ reversed.

Big difference: By Lenz's Law $\vec{E}$ would be CCW if the x was $\vec{B}$. But in the reverse case that x is $\vec{E}$, $\vec{B}$ is CW. Such is nature.

So we had
$$\oint_C \vec{E} \cdot d\vec{l} = -\frac{d}{dt} \Phi_B$$

we need
$$\oint_C \vec{B} \cdot d\vec{l} = \alpha \frac{d\Phi_E}{dt} \quad \text{where}$$

α is some constant to get the dimensions correct.

Figure 2.5: *
Unit 10, page 5

Dimensional Analysis:

$$\frac{\oint \vec{E} \cdot d\vec{\ell}}{\oint \vec{B} \cdot d\vec{\ell}} \sim \frac{d\phi_B/dt}{\beta d\phi_E/dt} \quad \text{or} \quad \frac{E/B}{\beta EA/t} \Rightarrow \left(\frac{E}{B}\right)^2 = \frac{1}{\beta}$$

$$\left(\frac{E}{B}\right)^2 \sim \frac{(F/q)^2}{(F/il)^2} = \frac{i^2 l^2}{q^2} \sim \frac{q^2 l^2}{t^2 q^2} \sim \frac{l^2}{t^2} = \frac{1}{\beta}$$

So $\beta \sim (l^2/t^2)^{-1} \sim \frac{1}{v^2}$. But the natural value of β is $\mu_0 \epsilon_0$ because this has SI units of m^2/s^2 . So

$$\oint_C \vec{E} \cdot d\vec{\ell} = -\frac{d\phi_B}{dt}; \quad \oint \vec{B} \cdot d\vec{\ell} = \mu_0 \epsilon_0 \frac{d\phi_E}{dt}$$

We are clearly on to something profound

because $\frac{1}{\sqrt{\mu_0 \epsilon_0}} = \left[\frac{1}{(4\pi \times 10^{-7})(8.85 \times 10^{-12})} \right]^{1/2} = 3 \times 10^8 \text{ m/s}$

The speed of light $c = 3 \times 10^8 \text{ m/s}$ so

$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$. We have connected the speed of light to quantities purely associated with E-fields and B-fields.

Figure 2.6: *
Unit 10, page 6


Displacement Current

we had $\oint_C \vec{B} \cdot d\vec{\ell} = \mu_0 i$ for magnetostatics

So to generalize our equation we can consider $\oint_C \vec{B} \cdot d\vec{\ell}$ arising from either currents i or E-field variation $d\phi_E/dt$. We can generalize Ampere's Law by defining the displacement current $i_d \equiv \epsilon_0 d\phi_E/dt$ so that

$$\oint_C \vec{B} \cdot d\vec{\ell} = \mu_0 (i + i_d) = \mu_0 i + \mu_0 \epsilon_0 \frac{d\phi_E}{dt}$$

We see that conduction current i is not continuous across the gap in the capacitor plates




$$\text{But as } \frac{dE}{dt} = \frac{d}{dt} \frac{\sigma}{\epsilon_0} = \frac{1}{\epsilon_0 A} \frac{dq}{dt} = \frac{i}{\epsilon_0 A}$$

$$i_d = \epsilon_0 \frac{d\phi_E}{dt} = \epsilon_0 \frac{dEA}{dt} = \epsilon_0 A \frac{dE}{dt} = i$$

$\Rightarrow$ the displacement current $i_d = i$ so

Figure 2.7: *
Unit 10, page 7

A more general picture is

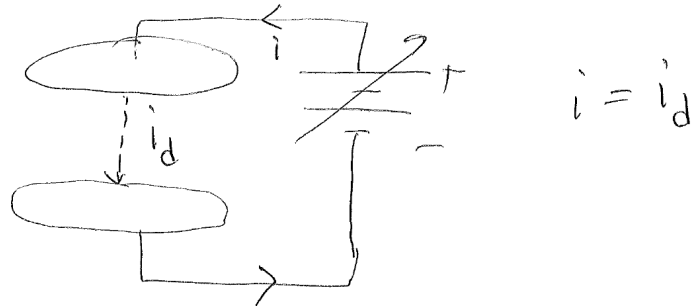

The displacement current gives us a physical picture where there is continuity of current through the gap!

Maxwell's Equations:

$$\oint_S \vec{E} \cdot \hat{n} da = q/\epsilon_0$$

$$\oint_S \vec{B} \cdot \hat{n} da = 0$$

$$\oint_C \vec{B} \cdot d\vec{\ell} = \mu_0 (i + \epsilon_0 \frac{d\phi_E}{dt})$$

$$\oint_C \vec{E} \cdot d\vec{\ell} = - d\phi_B/dt$$

This is a complete classical description of Electro-magnetism.

Figure 2.8: *
Unit 10, page 8

Chapter 3

Electromagnetic Waves

3.1 Fields from Time-Varying Sources

We saw early on that the electric dipole E-field drops like $\propto 1/r^3$, where r is the distance from the dipole. It can also be shown (not done in class but stated in the lecture notes) that the magnetic dipole B-field drops like $\propto 1/r^3$ as well. A more complicated charge distribution drops faster, like r^{-n} (e.g., the quadrupole has $n = 4$).

But what if the charges or currents in a distribution vary in time or position? This is a much more complicated problem than what we have considered so far.

Retarded Fields

Consider a charge distribution containing many charges, with the i th charge at position $\vec{\mathbf{r}}_i$, and a field point P :

$$\sum_i \vec{\mathbf{E}}(\vec{\mathbf{r}}_i) = \vec{\mathbf{E}}_P \quad (3.1)$$

The E-field at P from charge i is due to the position of charge i at the *retarded time* $t - |\vec{\mathbf{r}}_i|/c$ — because electromagnetic information cannot travel faster than the speed of light. So

$$\vec{\mathbf{E}}(\vec{\mathbf{r}}_i) \longrightarrow \vec{\mathbf{E}}\left(\vec{\mathbf{r}}_i, t - \frac{|\vec{\mathbf{r}}_i|}{c}\right) \quad (3.2)$$

$$\vec{\mathbf{E}}_P = \sum_i \vec{\mathbf{E}}\left(\vec{\mathbf{r}}_i, t - \frac{|\vec{\mathbf{r}}_i|}{c}\right) \quad (3.3)$$

So $\vec{\mathbf{E}}_P$ depends on the velocities $\vec{\mathbf{v}}_i$ and on t (through $\vec{\mathbf{r}}_i$). Maxwell's equations still apply, but it takes a lot of work to derive results.

3.2 Time-Varying Electric Dipole

How might we get a time-dependent dipole moment $\vec{\mathbf{p}}(t)$ from our static case? Recall that for two charges $\pm q$ separated by distance d along $\hat{\mathbf{y}}$:

$$\vec{\mathbf{p}} = qd\hat{\mathbf{y}} \quad (3.4)$$

If we make the charges oscillate up and down, $\vec{\mathbf{p}}$ oscillates in time.

3.2.1 LC Oscillator as a Source

A practical way to make an oscillating dipole is to drive an antenna with an LC oscillator. The setup:

- Capacitor C in parallel with inductor L (the primary LC tank).
- A second inductor coupled magnetically to L .
- A transmission line carrying the oscillating current to a dipole antenna.

As the LC circuit oscillates, the B-field oscillates and changes direction, so a current is driven in the second inductor by Lenz's Law. Then the antenna develops a potential difference — effectively, it acts as an oscillating dipole, with charge sloshing back and forth between its two halves.

3.2.2 Dipole Radiation

Since the LC oscillator has $\omega^2 = 1/LC$, the dipole oscillates at this same frequency:

$$\vec{\mathbf{p}}(t) = \vec{\mathbf{p}}_0 \cos \omega t \quad (3.5)$$

The emitted power obeys

$$\frac{dU}{dt} \propto \left(\frac{d^2 \vec{\mathbf{p}}}{dt^2} \right)^2 \quad (3.6)$$

Since $d^2 \vec{\mathbf{p}}/dt^2 = -\omega^2 \vec{\mathbf{p}}_0 \cos \omega t$, we find

$$\boxed{\frac{dU}{dt} \propto \omega^4} \quad (3.7)$$

This strong frequency dependence is responsible for many phenomena (e.g., why the sky is blue — Rayleigh scattering goes as ω^4).

3.2.3 Polarization of Dipole Radiation

The dipole antenna produces **polarized radiation**: the E-field at any field point lies in a specific (fixed) direction set by the orientation of the antenna, and the B-field is perpendicular to it. The radiation propagates in the direction $\vec{\mathbf{E}} \times \vec{\mathbf{B}}$ with $\vec{\mathbf{E}} \perp \vec{\mathbf{B}}$.

3.3 Traveling Waves

We will see that Maxwell's equations in vacuum admit solutions which travel at speed c and oscillate in amplitude. We need a mathematical representation of such waves.

Making a Disturbance Move

Suppose I have a function $E(x)$ representing the amplitude of an E-field along $\hat{x}$, with peak $E(0) \equiv E_0$ at the origin. I want this “disturbance” to move at speed v to the right. What function does this?

If the disturbance moves at speed v and started at $x = 0$, it will be at position $x_0 = vt$ at time t , where its amplitude must equal E_0 . The function

$$E(x, t) = E(x - vt) \quad (3.8)$$

does the job, since

$$E(x_0, t) = E(x_0 - vt) = E(0) = E_0 \quad (3.9)$$

So any function $f(x)$ becomes a wave traveling to the right at speed v via

$$\boxed{f(x, t) = f(x - vt) \quad (\text{right-moving}), \quad f(x, t) = f(x + vt) \quad (\text{left-moving})} \quad (3.10)$$

3.3.1 Periodic Waves

Suppose

$$E(x) = E_0 \sin \frac{2\pi x}{\lambda} \quad (3.11)$$

where λ is the distance between wave peaks (the *wavelength*) and E_0 is the amplitude. Make this a traveling wave by replacing $x \rightarrow x - vt$:

$$E(x, t) = E_0 \sin \left[\frac{2\pi}{\lambda} (x - vt) \right] \quad (3.12)$$

Define

$$k \equiv \frac{2\pi}{\lambda} \quad \text{“wave number” or } k\text{-vector} \quad (3.13)$$

$$\omega \equiv \frac{2\pi v}{\lambda} = 2\pi\nu \quad \text{angular frequency} \quad (3.14)$$

$$\nu = \text{frequency}, \quad T = 1/\nu = \text{period} \quad (3.15)$$

Then

$$\boxed{E(x, t) = E_0 \sin(kx - \omega t), \quad \omega = kv \quad (\text{dispersion relation})} \quad (3.16)$$

If you stand at position x_0 , this wave passes you and you undergo one full oscillation in time T .

Note: The solution $E = E_0 \sin(kx - \omega t)$ together with $\omega = kv$ is the solution to a *specific* differential equation — the classical wave equation, derived in Section 3.5 below.

3.4 Properties of EM Radiation

For an EM wave moving in the $+x$ direction:

$$\vec{E}(x, t) = \vec{E}_m \sin(kx - \omega t) \quad (3.17)$$

$$\vec{B}(x, t) = \vec{B}_m \sin(kx - \omega t) \quad (3.18)$$

with $\vec{E} \perp \vec{B}$. This is a **plane wave**: the amplitude is constant in the (y, z) plane perpendicular to the propagation direction, and varies only with x .

A specific orientation:

$$\vec{E} = E_m \sin(kx - \omega t) \hat{z} \quad (3.19)$$

$$\vec{B} = B_m \sin(kx - \omega t) \hat{y} \quad (3.20)$$

Key features:

- Direction of propagation = direction of $\vec{E} \times \vec{B}$
- $\vec{E} \perp \vec{B}$
- Speed $v \equiv c = 3 \times 10^8$ m/s (speed of light)

How Do We Get a Plane Wave?

Think of a stone thrown into a pond — a 2-D wave disturbance propagates outward in concentric circles. The wave fronts move out at speed v . For r large, the wave front gets flatter and looks (to an observer at position x_0) as though its amplitude is constant in the y -direction. As $r \rightarrow \infty$, $E(y) = \text{const}$ for all y . This is the plane wave limit.

3.5 The Wave Equation

We now derive the wave equation directly from Maxwell's equations in vacuum. Consider an EM wave propagating in $+\hat{x}$, with $\vec{\mathbf{E}}$ along one transverse direction and $\vec{\mathbf{B}}$ along the other. We apply Faraday's Law and Ampere–Maxwell's Law to two narrow rectangular Amperian loops in suitable planes.

Path 1: Faraday's Law

Choose a rectangular path of width dx and height h in a plane containing $\vec{\mathbf{E}}$. Then

$$\oint_1 \vec{\mathbf{E}} \cdot d\vec{\ell} = -\frac{\partial}{\partial t} \int_{S_1} \vec{\mathbf{B}} \cdot d\vec{\mathbf{a}} \quad (3.21)$$

$$\oint_1 \vec{\mathbf{E}} \cdot d\vec{\ell} = hE(x+dx) - hE(x) = -\frac{\partial B}{\partial t} h dx \quad (3.22)$$

Using $E(x+dx) - E(x) = \frac{\partial E}{\partial x} dx$:

$$\boxed{\frac{\partial E}{\partial x} = -\frac{\partial B}{\partial t}} \quad (3.23)$$

Path 2: Ampere–Maxwell Law

Choose a rectangular path of width dx and length L in a plane containing $\vec{\mathbf{B}}$ (no enclosed conduction current in vacuum):

$$\oint_2 \vec{\mathbf{B}} \cdot d\vec{\ell} = \mu_0 \epsilon_0 \frac{\partial}{\partial t} \int_{S_2} \vec{\mathbf{E}} \cdot d\vec{\mathbf{a}} \quad (3.24)$$

$$B(x)L - B(x+dx)L = \mu_0 \epsilon_0 \frac{\partial E}{\partial t} L dx \quad (3.25)$$

$$\boxed{-\frac{\partial B}{\partial x} = \mu_0 \epsilon_0 \frac{\partial E}{\partial t}} \quad (3.26)$$

Combining: The Wave Equation

We have

$$\frac{\partial E}{\partial x} = -\frac{\partial B}{\partial t}, \quad \frac{\partial B}{\partial x} = -\mu_0 \epsilon_0 \frac{\partial E}{\partial t} \quad (3.27)$$

Differentiate the first with respect to x :

$$\frac{\partial^2 E}{\partial x^2} = -\frac{\partial^2 B}{\partial x \partial t} \quad (3.28)$$

Differentiate the second with respect to t :

$$\frac{\partial^2 B}{\partial t \partial x} = -\mu_0 \varepsilon_0 \frac{\partial^2 E}{\partial t^2} \quad (3.29)$$

Combine:

$$\boxed{\frac{\partial^2 E}{\partial x^2} - \mu_0 \varepsilon_0 \frac{\partial^2 E}{\partial t^2} = 0 \quad \text{i.e.} \quad \frac{\partial^2 E}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 E}{\partial t^2} = 0} \quad (3.30)$$

since $1/c^2 = \mu_0 \varepsilon_0$. By differentiating in the same way for B we obtain

$$\boxed{\frac{\partial^2 B}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 B}{\partial t^2} = 0} \quad (3.31)$$

This is the **classical wave equation** for 1-D EM radiation. EM waves propagate in vacuum at speed c .

Verifying the Solution

You can easily check by direct differentiation that

$$E = E_m \sin(kx - \omega t), \quad B = B_m \sin(kx - \omega t) \quad (3.32)$$

solves the wave equation provided the dispersion relation $\omega = kc$ holds. Substituting:

$$-k^2 \sin(kx - \omega t) E_m + \frac{\omega^2}{c^2} E_m \sin(kx - \omega t) = 0 \implies \omega = kc \quad (3.33)$$

Relation between E and B Amplitudes

Since $\partial E / \partial x = -\partial B / \partial t$, plugging in the wave forms gives

$$k E_m \cos(kx - \omega t) = \omega B_m \cos(kx - \omega t) \implies k E = \omega B \quad (3.34)$$

$$\boxed{B = \frac{E}{c}, \quad B_0 = \frac{E_0}{c}} \quad (3.35)$$

This is the defining relation between the B and E amplitudes in a plane-parallel EM wave.

3.6 Poynting Vector: Energy Transport

EM waves transport energy. The **Poynting vector** is

$$\boxed{\vec{S} \equiv \frac{1}{\mu_0} \vec{E} \times \vec{B} = \text{energy crossing unit area in unit time due to EM wave}} \quad (3.36)$$

Its magnitude is

$$|\vec{S}| = \frac{1}{\mu_0} E B = \frac{dU}{dt} \frac{1}{A} \quad (3.37)$$

where U is the energy of the EM wave. Using $1/\mu_0 = c^2 \varepsilon_0$ and $B = E/c$:

$$S = \frac{1}{\mu_0} E B = c \varepsilon_0 E^2 \quad (3.38)$$

Time Average $\langle S \rangle$

For a plane wave $E = E_m \sin(kx - \omega t)$:

$$S = c\varepsilon_0 E_m^2 \sin^2(kx - \omega t) \quad (3.39)$$

The time average of $\sin^2$ over one cycle is $1/2$, so

$$\boxed{\langle S \rangle = \frac{1}{2}\varepsilon_0 E_m^2 c = c u_{E,\max}, \quad u_{E,\max} = \frac{1}{2}\varepsilon_0 E_m^2} \quad (3.40)$$

Derivation of S from Energy Density

Consider energy passing through a face of area A of a small cube during time dt . The energy in the cube is

$$dU = \left(\frac{1}{2}\varepsilon_0 E^2 + \frac{B^2}{2\mu_0} \right) \underbrace{A c dt}_{dV} \quad (3.41)$$

where $A c dt$ is the volume of the slab of EM field that crosses the face in time dt . Then

$$S = \frac{1}{A} \frac{dU}{dt} = \frac{1}{2}\varepsilon_0 E^2 + \frac{B^2}{2\mu_0} \quad (3.42)$$

With $B = E/c$ and $1/\mu_0 = \varepsilon_0 c^2$, the two terms are equal, so

$$S = \varepsilon_0 E^2 c, \quad \langle S \rangle = \frac{1}{2}\varepsilon_0 E_m^2 c \quad (3.43)$$

in agreement with the cross-product definition above.

3.7 Polarization

A dipole antenna emits radiation in which $\vec{\mathbf{E}}$ and $\vec{\mathbf{B}}$ have a definite, fixed orientation as the wave propagates. This is called **polarized radiation**. Lasers also emit polarized radiation.

This is not the case with most natural sources. An ensemble of atoms emits with each atom's dipole moment randomly oriented, so the radiation is **unpolarized**.

Polarized EM Wave (View Looking into the Wave)

Suppose the radiation is approaching us. For an EM wave with $\vec{\mathbf{E}}$ at angle θ from $\hat{x}$ in the (x, y) plane, any angle θ is acceptable provided $\vec{\mathbf{E}} \times \vec{\mathbf{B}}$ points out of the page (toward us). For example:

$$\vec{\mathbf{E}} = E_m \cos \theta \hat{x} + E_m \sin \theta \hat{y} \quad (3.44)$$

$$\vec{\mathbf{B}} = -B_m \sin \theta \hat{x} + B_m \cos \theta \hat{y} \quad (3.45)$$

$$\vec{\mathbf{E}} \times \vec{\mathbf{B}} = E_m B_m \hat{z} \quad (3.46)$$

Unpolarized EM Wave

The ensemble of atoms produces a pattern of $\vec{\mathbf{E}}$ at all possible orientations (and $\vec{\mathbf{B}}$ at right angles to each $\vec{\mathbf{E}}$).

3.8 Polarizers

We can convert unpolarized radiation to polarized radiation with a **polarizer**. Consider a metal wire in an EM wave whose $\vec{E}$ is parallel or perpendicular to the wire:

$\vec{E}$ parallel to wire: The E-field induces an oscillating current of electrons in the wire, i.e., the wire acts like a dipole antenna whose re-emitted field *cancels* the incoming $\vec{E}$ (and the attached $\vec{B}$). So $E_P = 0$ on the far side of the wire.

$\vec{E}$ perpendicular to wire: No current can flow along the wire (no component of $\vec{E}$ along the wire). The EM wave passes through. $E_P = E$.

In reality we need an array of wires with spacing $d \lesssim \lambda$. This acts like a solid sheet of wires and behaves as described.

Polarizer Transmission (Malus's Law)

Looking down the propagation direction, the polarizer's wires lie along one axis, and only the projection of $\vec{E}$ *perpendicular* to the wires can pass through. Assume 100% polarized incoming radiation with $\vec{E}$ at angle θ from the transmission axis (perpendicular to the wires):

$$E_{\perp} = E_m \cos \theta \quad (3.47)$$

The flux scales as E^2 :

$$S_0 = \text{initial flux} = K E_m^2, \quad K = \text{constant} \quad (3.48)$$

$$S_T = \text{transmitted flux} = K E_m^2 \cos^2 \theta = S_0 \cos^2 \theta \quad (3.49)$$

$$\boxed{S_T = S_0 \cos^2 \theta \quad (\text{Malus's Law})} \quad (3.50)$$

Checks:

- $\theta = 0$: $S_T = S_0$ (100% transmission). ✓
- $\theta = \pi/2$: $S_T = 0$ (0% transmission). ✓
- $\theta = 45^\circ$: $S_T = S_0/2$ (50% transmission).

In each case the new EM wave is polarized orthogonal to the wire plane.

Unpolarized Radiation Through a Polarizer

For unpolarized incoming light, $\vec{E}$ has all possible orientations equally. The probability density of finding the angle between $\vec{E}$ and the transmission axis to be θ is

$$p(\theta) = \frac{1}{2\pi} \quad (\text{any angle equally likely}) \quad (3.51)$$

For any θ , $S_T(\theta) = S_0 \cos^2 \theta$, so the average transmitted flux is

$$\langle S_T(\theta) \rangle_{\text{all angles}} = \int_0^{2\pi} p(\theta) S_T(\theta) d\theta = \frac{1}{2\pi} \int_0^{2\pi} S_0 \cos^2 \theta d\theta \quad (3.52)$$

Using $\int_0^{2\pi} \cos^2 \theta d\theta = \pi$ (or the reduction formula $\int \cos^n \theta d\theta = \frac{n-1}{n} \int \cos^{n-2} \theta d\theta$):

$$\boxed{\langle S_T \rangle = \frac{1}{2} S_0} \quad (3.53)$$

So 50% of unpolarized radiation passes through the polarizer, and the transmitted light is now polarized.

3.9 Spherical Waves and Huygens' Principle

EM waves (as described) are **transverse waves**: amplitude oscillations are perpendicular to the propagation direction.

Plane waves propagate in one direction with amplitude constant in a plane transverse to that direction. But many sources put out **spherical waves**, which propagate radially.

Huygens' Principle

Huygens provided a simple way to understand wave propagation. *Every point on a wave front can be considered the source of spherical wavelets*, and each wavelet propagates an equal distance in equal time. The new wave front is the surface tangent to all the wavelets.

Plane wave → **plane wave**: Connect tangents to the wavelets emitted from points along a planar wave front; they propagate as a plane wave. (Ignore the backward-traveling wavelet halves — this is a known shortcoming of the simplest version of the principle, repaired in the full Kirchhoff formulation.)

Spherical wave → **spherical wave**: Tangents to wavelets emitted from a spherical wave front trace out a new (larger) spherical wave front.

Huygens' construction underlies the explanations of reflection, refraction, and diffraction in subsequent units. While visual and geometric, this construction accurately describes the 3-D wave solution of the traveling wave equation. It will be useful when we study diffraction and interference.

Lecture Pages (Unit 11)

Electromagnetic Waves : unit 11

We saw early on that electric dipole E -field drops like $\propto 1/r^3$ r = distance from dipole

I did not show it in class (but it is in my lecture notes) that magnetic dipole B -field drops like $\propto 1/r^3$ too.

A more complicated charge distribution drops like r^{-n} (eg we saw quadrupole has $n=4$).

But what if the charges or currents in a distribution vary in time or position?

This is a much more complicated problem than we have considered.



Charge distribution

$$\sum_i \vec{E}(\vec{r}_i) = \vec{E}_P$$

The E -field at P from charge i is due to the position of charge i at time $|\vec{r}_i|/c$

$$\text{so } \vec{E}(\vec{r}_i) \rightarrow \vec{E}(\vec{r}_i, t - |\vec{r}_i|/c)$$

$$\vec{E}_P = \sum_i \vec{E}(\vec{r}_i, t - |\vec{r}_i|/c)$$

Figure 3.1: *
Unit 11, page 01



So $\vec{E}_p$ depends on the $\vec{v}_i$ and t (through $\vec{r}_i$)
 Maxwell's Equations still apply, but it takes A
 lot of work to derive results.

Time varying electric dipole:

How might we get $\vec{p}(t)$ from our static case?

$\vec{p} = q d \hat{y}$


LC oscillator

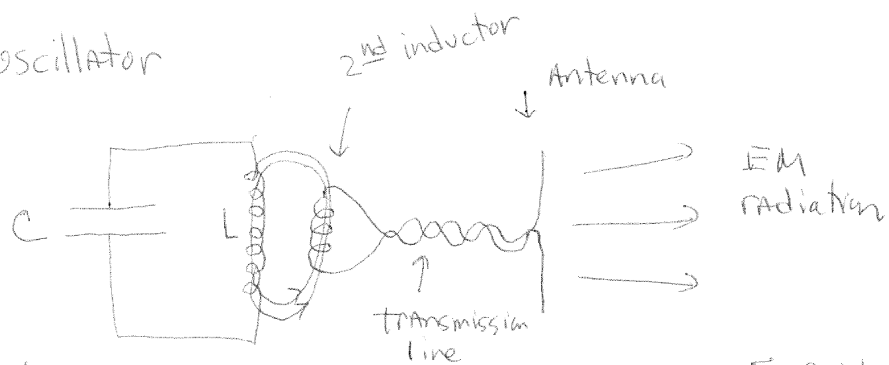

As LC circuit oscillates, $\vec{B}$ field
 oscillates and changes direction.
 $\Rightarrow$ current is driven in 2nd inductor
 by Lenz's law.

Then the antenna will develop a
 potential difference


$\left. \begin{array}{c} + \\ - \end{array} \right\}$
 $\left. \begin{array}{c} - \\ + \end{array} \right\}$
 ie it is an oscillating
 dipole

Figure 3.2: *
 Unit 11, page 02

Since the LC oscillator has $\omega^2 = \frac{1}{LC}$, the dipole oscillation frequency is $\vec{p} = \vec{p}_0 \cos \omega t$
 And the emitted power $\frac{dU}{dt} \propto \left(\frac{d^2 p}{dt^2}\right)^2$

Then we see that $\frac{dU}{dt} \propto \omega^4$

The dipole antenna produces polarized radiation :

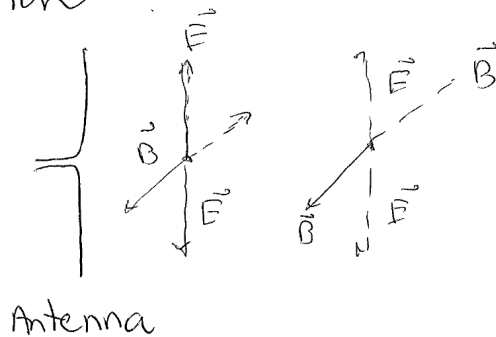


The radiation moves in the direction $\vec{E} \times \vec{B}$ And $\vec{E} \perp \vec{B}$

Figure 3.3: *
 Unit 11, page 03

Traveling waves


We will see that Maxwell's Equations in vacuum admit solutions which are moving at speed c and oscillate in Amplitude. Thus we need to find a mathematical representation of these waves.

Suppose I have a function $E(x)$. It may represent the Amplitude of an Electric field in the x -direction. How do I make this disturbance move?

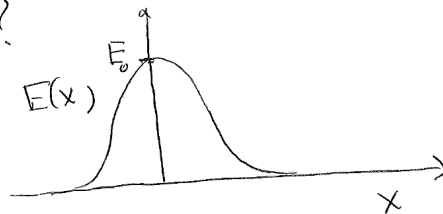

$$E(0) \equiv E_0 = \text{amplitude}$$

I want this "disturbance" to move at speed v . What function does this?

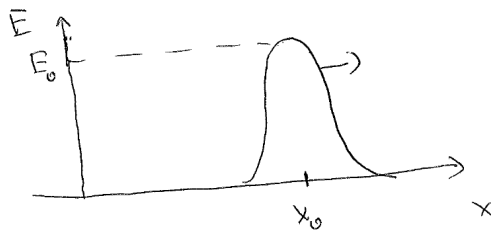

If the ~~disturbance~~ moves at speed v and started
At $x=0$, it will be at position x_0 at
time $x_0 = vt$ where its Amplitude will

Figure 3.4: *
Unit 11, page 04


be $E(x, t) = E(x - vt)$. Note that as expected

$$E(x_0, t) = E(x_0 - vt) = E(0) \equiv E_0. \quad \text{The wave}$$

The disturbance is moving. Let us call it a wave. Note I turn my function $f(x)$ into a wave traveling to the right at speed v by forming $f(x + t) = f(x - vt)$. You can check the wave will move left if $f(x + t) = f(x + vt)$.

Periodic Waves.

Suppose $E(x) = E_0 \sin \frac{2\pi x}{\lambda}$

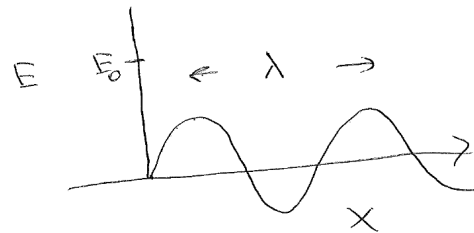

λ = distance between wave peaks

E_0 = Amplitude

I can make this a traveling wave by

$$E(x) \rightarrow E(x - vt) \rightarrow E_0 \sin \left[\frac{2\pi}{\lambda} (x - vt) \right]$$

Define $K \equiv \frac{2\pi}{\lambda}$ = "wave number" or K-vector

$$\frac{2\pi v}{\lambda} \equiv \omega = \text{angular frequency} \equiv 2\pi \nu$$

ν = frequency; $\omega = K v$ (dispersion relation)

$T = 1/\nu$ = period of wave

[If I stand at x_0 , this wave will pass me
And undergo 1 full oscillation in time T]

Figure 3.5: *
Unit 11, page 05

Note: This solution $E = E_0 \sin(Kx - \omega t)$ and $\omega = Kv$ is for a specific differential equation, not any arbitrary equation. It is the solution to the classical wave equation.

Properties of EM radiation:

For a wave moving in the x-direction

$$\vec{E}(x,t) = \vec{E}_m \sin(Kx - \omega t) ; E_m = \text{amplitude}$$

$$\vec{B}(x,t) = \vec{B}_m \sin(Kx - \omega t)$$

$$\vec{E} \perp \vec{B}$$

This is a plane wave. Consider EM waves

$$\vec{E} = E_m \sin(Kx - \omega t) \hat{z}$$

$$\vec{B} = B_m \sin(Kx - \omega t) \hat{y}$$

Direction of EM wave is direction of $\vec{E} \times \vec{B}$

$$\vec{E} \perp \vec{B}$$

speed $v \equiv c = \text{speed of light} = 3 \times 10^8 \text{ m/s}$


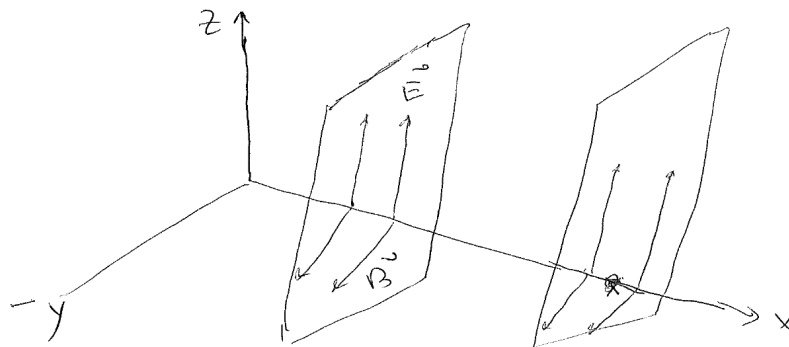


Figure 3.6: *
Unit 11, page 06


This wave has an amplitude which is constant in the $(y-z)$ plane. It varies only in x .

How do we get a plane wave?

Think Analogy to a stone thrown in a pond.
This is a 2-d wave disturbance.

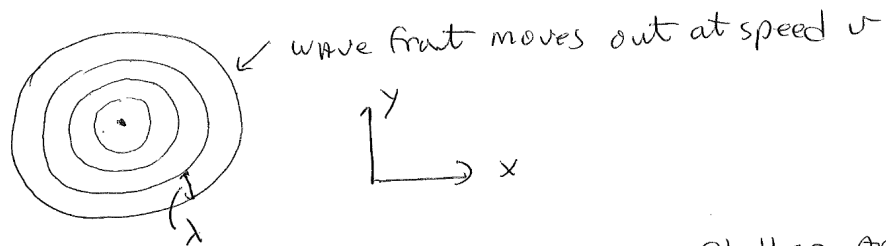


For r large, the wave front gets flatter and looks as though its amplitude is constant in the y -direction if we stand at position x_0

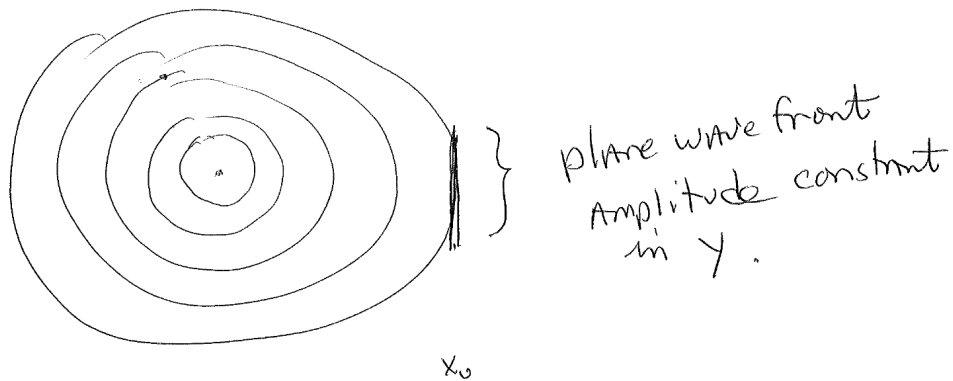

for $r \rightarrow \infty$, $E(y) = \text{constant}$ for all y

Figure 3.7: *
Unit 11, page 07

From: Charles J. Hailey cjh26@columbia.edu
Subject: em waves
Date: Mar 31, 2026 at 9:38:38 AM
To: Chuck chuckh@astro.columbia.edu

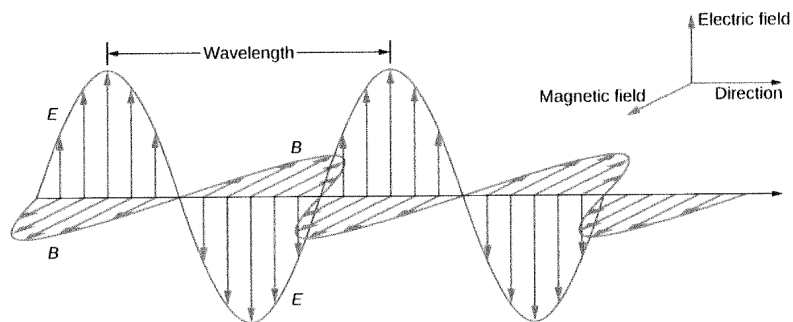


Plane wave image taken from OpenStax University Physics vol. 2 and is licensed under CC-BY

Because electromagnetic energy can be described as a wave, it has all the properties and behaviors of a wave:

- Amplitude: The magnitude of the electric field (E) is used to describe the amplitude of the wave.
- Wavelength: The distance separating adjacent locations (λ) where the electric field is maximum.
- Frequency: The frequency (f) at which the source charge oscillates.
- Wave Speed: $v_{\text{wave}} = \lambda f$

Figure 3.8: *
Unit 11, page 08

Wave Equation

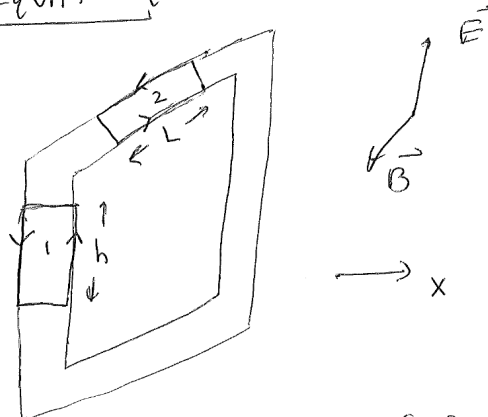

Path 1 $\oint \vec{E} \cdot d\vec{l} = -\frac{\partial}{\partial t} \int \vec{B} \cdot d\vec{a}$

$$\oint \vec{E} \cdot d\vec{l} = hE(x+dx) - E(x)h = -\frac{\partial B}{\partial t} h dx$$

$$\Rightarrow \frac{\partial E}{\partial x} = -\frac{\partial B}{\partial t} \quad [E(x+dx) - E(x) = \frac{\partial E}{\partial x} dx]$$

Path 2 $\oint \vec{B} \cdot d\vec{l} = \mu_0 \epsilon_0 \oint \vec{E} \cdot d\vec{a}$

$$B(x)L - B(x+dx)L = \mu_0 \epsilon_0 \frac{\partial E}{\partial t} L dx$$

$$\Rightarrow -\frac{\partial B}{\partial x} = \mu_0 \epsilon_0 \frac{\partial E}{\partial t}$$

Summary: $\frac{\partial E}{\partial x} = -\frac{\partial B}{\partial t} ; \frac{\partial E}{\partial t} = -\frac{1}{\mu_0 \epsilon_0} \frac{\partial B}{\partial x}$

$$\frac{\partial^2 E}{\partial x^2} = -\frac{\partial^2 B}{\partial x \partial t} ; \frac{\partial^2 E}{\partial t^2} = -\frac{1}{\mu_0 \epsilon_0} \frac{\partial^2 B}{\partial x \partial t}$$

$$\Rightarrow \frac{\partial^2 E}{\partial x^2} - \mu_0 \epsilon_0 \frac{\partial^2 E}{\partial t^2} = 0$$

$$\frac{\partial^2 E}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 E}{\partial t^2} = 0$$

Figure 3.9: *
Unit 11, page 09

By differentiating in the same way on B we obtain

$$\frac{\partial^2 E}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 E}{\partial t^2} = 0 ; \quad \frac{\partial^2 B}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 B}{\partial t^2} = 0$$

This is the classical wave equation for 1-d EM radiation

EM waves propagate in vacuum at speed c .

Solution :

You can easily check by direct differentiation that $E = E_m \sin(kx - \omega t)$; $B = B_m \sin(kx - \omega t)$ will solve this set of equations provided the dispersion relation $\omega = kc$ holds.

$$-k^2 \sin(kx - \omega t) \times E_m + \frac{\omega^2}{c^2} E_m \sin(kx - \omega t) = 0$$

So if $\omega = kc$ we have a solution

Note: Since $\frac{\partial E}{\partial x} = -\frac{\partial B}{\partial t} \Rightarrow kE = \omega B$ or

$$\underline{B = E/c} ; \quad \underline{B_0 = \frac{E_0}{c}}$$

Defining relation for $B \leftrightarrow E$ Amplitude
in a plane-parallel EM wave

Figure 3.10: *
Unit 11, page 10

Poynting Vector : EM waves transport energy

$$\vec{S} \equiv \frac{1}{\mu_0} \vec{E} \times \vec{B} = \text{energy crossing unit area in unit time due to EM wave}$$

$$|\vec{S}| = \frac{1}{\mu_0} EB = \frac{dU}{dt} \frac{1}{A} \quad U = \text{energy of EM wave}$$

We can also write this as $S = |\vec{S}| = \frac{1}{\mu_0} EB$

But $\frac{1}{\mu_0} = c^2 \epsilon_0$ And $B = E/c$ so

$$S = c \epsilon_0 E^2 \quad \langle S \rangle = \text{time average of } S$$


$$S = c \epsilon_0 \langle E_m^2 \sin^2(kx - \omega t) \rangle = c \epsilon_0 E_m^2 \langle \sin^2(kx - \omega t) \rangle$$

The average of $\sin^2$ over a cycle is $1/2$

$$\langle S \rangle = \frac{1}{2} \epsilon_0 E_m^2 c = \text{~~scribbled out~~};$$

$$\langle S \rangle = c U_{E, \max} \quad U_{E, \max} = \frac{1}{2} \epsilon_0 E_m^2$$

Derivation of S :



How much energy crosses right face of cube in time dt ?

Figure 3.11: *
Unit 11, page 11


Cube energy $dU = \left(\frac{1}{2} \epsilon_0 E^2 + \frac{B^2}{2\mu_0} \right) \underbrace{Ac dt}_{dV}$

$$\frac{1}{A} \frac{dU}{dt} \equiv S = \frac{1}{2} \epsilon_0 E^2 + \frac{B^2}{2\mu_0} = \epsilon_0 E^2 \quad \begin{matrix} B = E/c \\ \frac{1}{\mu_0} = \epsilon_0 c^2 \end{matrix}$$

$$\langle S \rangle = \frac{1}{2} \epsilon_0 E_m^2 c$$

Polarization

The dipole antenna emits radiation where $\vec{E}$ and $\vec{B}$ have a definite, fixed orientation for propagation to the right.



This is called polarized radiation.


Lasers also emit polarized radiation

This is not the case with most sources of radiation, whose radiation is unpolarized. An ensemble of atoms emit with each atom having a dipole moment randomly oriented

Figure 3.12: *
Unit 11, page 12

Suppose the radiation is approaching us

Polarized EM wave

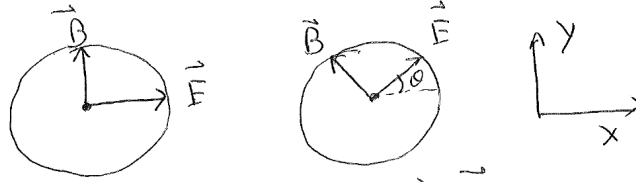

Any angle θ is acceptable provided $\vec{E} \times \vec{B}$ points out of page (towards us)

eg. In the right hand case


$$\vec{E} = E_m \cos\theta \hat{x} + E_m \sin\theta \hat{y}$$

$$\vec{B} = -B_m \sin\theta \hat{x} + B_m \cos\theta \hat{y}$$

$$\vec{E} \times \vec{B} = E_m B_m \hat{z}$$

Unpolarized EM wave


The ensemble of atoms will produce a pattern of $\vec{E}$ and $\vec{B}$ assuming all possible orientations



And $\vec{B}$ at right angles to each $\vec{E}$

Figure 3.13: *
Unit 11, page 13

We can convert unpolarized radiation to polarized radiation with a polarizer.
 Consider a metal wire subjected to a polarized EM wave whose $\vec{E}$ -field is oriented parallel or perpendicular to the wire.

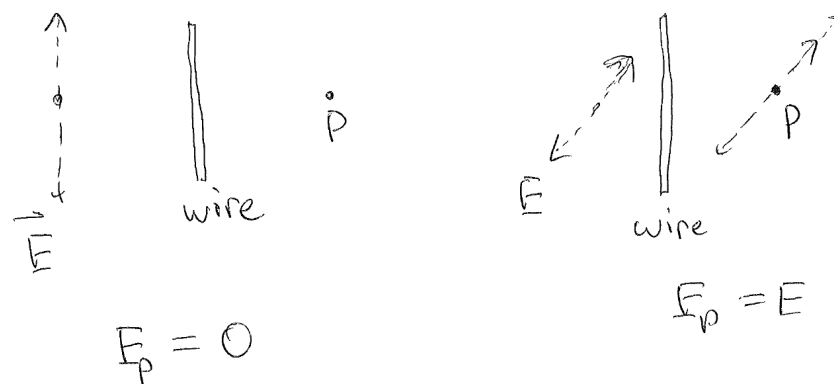

$\vec{E}$ -field on left induces an oscillating current of e^- 's in the wire i.e. it acts like a dipole antenna that cancels the incoming $\vec{E}$ field (and thus the attached $\vec{B}$).

On the right, looking in the direction of EM wave travel we have





Figure 3.14: *
 Unit 11, page 14

E-field is $\perp$ to wire so no current can be set up. The EM wave passes through the wire.

In reality we need an array of wires whose spacing $d \lesssim \lambda$. This will act like a solid sheet of wires and behave as described.

Polarizer Transmission

Only the projection of $\vec{E}$ perpendicular to the wires can make it through the polarizer.
Assume 100% polarized radiation



$$E_{\perp} = E_m \cos \theta$$

$$S_0 = \text{initial Flux} = K E_m^2 \quad K = \text{constant}$$

$E_m \cos \theta$ = component of E -field that can pass through polarizer

$$S_T = \text{transmitted (polarized) component} = K E_m^2 \cos^2 \theta = S_0 \cos^2 \theta$$



Check: IF $\theta = 0$ $S_T = S_0$ 100% transmission ✓
IF $\theta = \pi/2$ $S_T = 0$ 0% transmission ✓
IF $\theta = 45^\circ$ $S_T = \frac{1}{2} S_0$ 50% transmission

In each case we get a new EM wave like this



Figure 3.16: *
Unit 11, page 16

Unpolarized Radiation



$\vec{E}$ of unpolarized radiation

$P(\theta) =$ probability of Any angle between $\vec{E}$ and perpendicular to wire direction
 $= 1/2\pi$ (any angle equally likely)

For any θ $S_T(\theta) = S_0 \cos^2 \theta$

Math: $\int \cos^n \theta d\theta = \frac{n-1}{n} \int \cos^{n-2} \theta d\theta$

$$\langle S_T(\theta) \rangle_{\text{All angles}} = \int_0^{2\pi} P(\theta) S_T(\theta) d\theta = \frac{1}{2\pi} \int_0^{2\pi} S_0 \cos^2 \theta d\theta$$

$$\langle S_T(\theta) \rangle = \frac{1}{2} S_0$$

So 50% of radiation passes through the polarizer and its E-field looks like




Figure 3.17: *
 Unit 11, page 17

More about waves:

Waves that have amplitude oscillations that are perpendicular to the propagation direction are called transverse waves. EM waves as we described are transverse.


Spherical waves:

We saw plane waves propagate in one direction with amplitude constant in a plane transverse to that direction.

But many sources put out spherical waves, which propagate radially.

Huygens provided a simple way to understand the propagation of such waves. Huygens considered a plane wave as composed of spherical wavelets, each wavelet in a wave front producing waves that propagate an equal distance in equal time. Consider:

Plane wave $\rightarrow$ plane wave

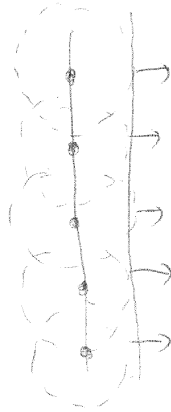

connect tangents to wave front
wave propagates as plane wave
ignore backwards wave

Spherical to spherical wave

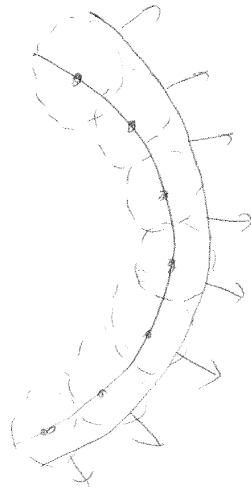


Figure 3.19: *
Unit 11, page 19

Chapter 4

Ray Optics (Geometric Optics)

4.1 Rays

Another representation, very useful in optics, is to consider **rays** as lines which propagate *perpendicular* to a wave front.

Spherical source: Draw rays radiating outward, each perpendicular to the spherical Huygens wave fronts.

Plane waves: Rays are parallel straight lines perpendicular to the planar wave fronts.

The Huygens construction explains the alteration of the path of light when it changes from one medium to another. The normals to the wave front are called **rays**, and are used to formulate geometric optics — often easier to use than wave fronts.

4.2 Snell's Law of Refraction

Key: The speed of light in a medium is c/n , where n is the **index of refraction** of the medium. In vacuum $n \equiv 1$. In air, $n = 1.0003$.

Each Huygens wavelet on the front advances in steps of Δt , but in medium n_2 travels at $v_2 = c/n_2$, while in medium n_1 at $v_1 = c/n_1$. Consider a planar wave front incident at angle θ_1 on the interface, with the refracted front at angle θ_2 . The geometry of advancing wavelets gives

$$\sin \theta_1 = \frac{v_1 \Delta t}{L} = \frac{c \Delta t / n_1}{L}, \quad \sin \theta_2 = \frac{v_2 \Delta t}{L} = \frac{c \Delta t / n_2}{L} \quad (4.1)$$

where L is the distance along the interface between the two ends of the wave front. Dividing one by the other:

$$\boxed{n_1 \sin \theta_1 = n_2 \sin \theta_2} \quad (\text{Snell's Law}) \quad (4.2)$$

Example: Light into Glass

Take $n_{\text{glass}} = 1.6$, $n_{\text{air}} = 1$, incident angle $\theta_1 = 45^\circ$:

$$\sin \theta_1 = n_g \sin \theta_2 \implies \sin \theta_2 = \frac{\sin 45^\circ}{1.6} \implies \theta_2 = 26.2^\circ \quad (4.3)$$

Rules of thumb:

- For $n_2 > n_1$: light bends *toward* the normal.
- For $n_2 < n_1$: light bends *away* from the normal.

4.3 Total Internal Reflection

For a light source in medium 1 with $n_1 < n_2$ swapped — i.e., light traveling from a *denser* medium (n_1) to a *less dense* one (n_2 , with $n_2 < n_1$) — there is a critical angle θ_c where the refracted ray grazes the interface ($\theta_2 = 90^\circ$):

$$n_1 \sin \theta_c = n_2 \sin 90^\circ \implies \boxed{\sin \theta_c = \frac{n_2}{n_1}} \quad (4.4)$$

For $\theta_1 > \theta_c$, no light escapes the medium — it is all reflected back. This is **total internal reflection**.

4.4 Fiber Optics

A fiber consists of a core of index n_{core} surrounded by cladding of index n_{clad} , with $n_{\text{core}} > n_{\text{clad}}$. Light enters the end face from air, refracts into the core, and bounces along by total internal reflection at the core/cladding interface.

Setup: Light at angle θ_{1c} in air enters the core at the end face, refracting to angle θ_2 . It then strikes the side wall at angle $90^\circ - \theta_2$ from the normal of the side wall. For total internal reflection at the side, this angle must equal the critical angle, where the refracted ray would graze ($\theta_3 = 90^\circ$ in cladding):

$$n_1 \sin \theta_{1c} = n_2 \sin \theta_2 \quad (4.5)$$

$$n_2 \sin(90^\circ - \theta_2) = n_3 \sin 90^\circ \quad (4.6)$$

With $n_1 = 1$ (air), $n_2 = n_{\text{core}}$, $n_3 = n_{\text{clad}}$:

$$\sin \theta_{1c} = n_{\text{core}} \sin \theta_2 \quad (4.7)$$

$$n_{\text{core}} \cos \theta_2 = n_{\text{clad}} \quad (4.8)$$

$$\implies n_{\text{core}} \sin \theta_2 = n_{\text{core}} \sqrt{1 - (n_{\text{clad}}/n_{\text{core}})^2} = \sqrt{n_{\text{core}}^2 - n_{\text{clad}}^2} \quad (4.9)$$

$$\boxed{\sin \theta_{1c} = \sqrt{n_{\text{core}}^2 - n_{\text{clad}}^2}} \quad (4.10)$$

Telecommunication fiber: Cladding is pure silica $n = 1.445$; core is silica doped with GeO_2 , $n = 1.450$.

For $\theta_1 > \theta_{1c}$, light leaks into the cladding. For $\theta_1 < \theta_{1c}$, light is totally internally reflected and propagates with very low loss.

Numerical Aperture

Define

$$\sin \theta_{1c} \equiv \text{NA} = \text{numerical aperture} \quad (4.11)$$

The cone of acceptance (solid angle) is

$$\Delta\Omega = 2\pi(1 - \cos \theta_{1c}) = 2\pi \left(1 - \sqrt{1 - \text{NA}^2}\right) \quad (4.12)$$

For $\text{NA} \ll 1$:

$$\Delta\Omega \approx \pi \text{NA}^2 \quad (4.13)$$

For a typical telecom fiber, $\text{NA} = 0.12$, giving $\Delta\Omega = 0.045$ sr.

4.5 Flat Mirrors

Light reflects from a surface with **angle of incidence equals angle of reflection**.

Image construction: An object O at distance o from the mirror produces a virtual image I at distance i behind the mirror. To the eye, the diverging reflected rays appear to come from a source at I .

- O = object (emitter)
- I = virtual image
- o = object–mirror distance, i = image–mirror distance

For a flat mirror,

$$\boxed{-i = o \quad (\text{the } - \text{ sign reminds us it is a virtual image})} \quad (4.14)$$

4.6 Curved Mirrors (Concave)

Geometry of a concave mirror with object O on the optic axis, center of curvature C , real image I , and a single ray reflecting off the mirror at angle θ from the local normal (which passes through C):

- r = radius of curvature
- o = object distance, i = image distance
- Angles α (at O), β (at C), γ (at I), where $\alpha, \gamma \ll 1$ (paraxial approximation)

Derivation

By the alternate-exterior-angle relations,

$$\gamma = 2\theta + \alpha, \quad \beta = \alpha + \theta, \quad 2\beta - \gamma = \alpha \quad (4.15)$$

For small angles, with arc length s from the optic axis to the reflection point:

$$\alpha = s/o, \quad \beta = s/r, \quad \gamma = s/i \quad (4.16)$$

Substituting:

$$\frac{2s}{r} - \frac{s}{i} = \frac{s}{o} \implies \boxed{\frac{1}{o} + \frac{1}{i} = \frac{2}{r}} \quad (4.17)$$

Sign Convention (R-side / V-side)

Define

- **R-side** = side of the mirror real images form on (in front of mirror)
- **V-side** = side of the mirror virtual images form on (behind mirror)

Rules (mirrors):

- If I is on R-side: $i > 0$
- If I is on V-side: $i < 0$
- If C is on R-side: $r > 0$ (concave mirror)
- If C is on V-side: $r < 0$ (convex mirror)

4.7 Parallel Rays and the Focal Plane

Parallel light rays focus in the **focal plane**.

On-axis source (parallel rays along optic axis): Take $o \rightarrow \infty$ in the mirror equation $1/o + 1/i = 2/r$. Then $i = r/2$. Since this is where parallel light focuses, define the **focal length**:

$$f \equiv \frac{r}{2}, \quad \frac{1}{o} + \frac{1}{i} = \frac{1}{f} \quad (4.18)$$

Off-axis source (parallel rays at an angle): Light still focuses in the focal plane, but at an off-axis point F' (or F'' on the other side). The set of all such off-axis focal points form the **focal plane** through F .

4.8 Images and Ray-Tracing Rules

To find the image of an extended object of height h :

Three principal rays (for a concave mirror):

1. A ray through C reflects back through C (it hits normal-on).
2. A ray through F reflects parallel to the optic axis.
3. A ray parallel to the optic axis reflects through F .

The image height h' has the opposite sign from h (image is inverted).

Magnification

Geometry shows that

$$m = -\frac{i}{o} = \frac{h'}{h} \quad (4.19)$$

The minus sign indicates the image is upside-down from the object.

4.9 Convex Mirror

For a convex mirror, both I and C are on the V-side, so $i < 0$ and $r < 0$.

Worked Example

Convex mirror with $r = 20$ cm (so $r = -20$ cm by sign convention), object distance $o = 14$ cm. Where is I ?

$$\frac{1}{o} + \frac{1}{i} = \frac{2}{r} \implies \frac{1}{14 \text{ cm}} + \frac{1}{i} = \frac{2}{-20 \text{ cm}} \quad (4.20)$$

$$\frac{1}{i} = -\frac{1}{10 \text{ cm}} - \frac{1}{14 \text{ cm}} \implies i = -5.8 \text{ cm} \quad (4.21)$$

Since $i < 0$, the image is on the V-side (virtual image behind the mirror), as expected for a convex mirror.

4.10 Sign Rules: Lenses vs Mirrors

Lenses (Refraction)

Signs defined by converging/diverging rays at each surface.

Object distance o :

- $o > 0$: incident rays at the surface are diverging (real object)
- $o < 0$: incident rays are converging (virtual object)

Image distance i :

- $i > 0$: refracted rays are converging (real image)
- $i < 0$: refracted rays are diverging (virtual image)

Radius of curvature R :

- $R > 0$: surface is convex as seen by the incoming light
- $R < 0$: surface is concave as seen by the incoming light

Mirrors (Reflection)

Signs defined by which side real images form on (R/V rule).

Object distance o :

- $o > 0$: object on R-side (real object; in front of mirror)
- $o < 0$: object on V-side (virtual object; behind mirror)

Image distance i :

- $i > 0$: image on R-side (real image; in front)
- $i < 0$: image on V-side (virtual image; behind)

Radius of curvature R :

- $R > 0$: center of curvature on R-side (concave mirror)
- $R < 0$: center on V-side (convex mirror)

4.11 Refracting Surface

Single spherical refracting surface separating medium n_1 from medium n_2 , center of curvature C , radius r .

Sign rules (refracting surface):

- V-side = incident-light side; R-side = side image forms on
- $r < 0$ if C is on V-side; $r > 0$ if C on R-side
- $i < 0$ if image on V-side; $i > 0$ if image on R-side

Derivation

A ray from object O hits the surface at angle θ_1 from the normal (which passes through C), refracts to angle θ_2 , and reaches the image I . Define angles α at O , β at C , γ at I . Geometry gives

$$\theta_1 = \alpha + \beta, \quad \beta = \theta_2 + \gamma \quad (4.22)$$

Snell's law:

$$n_1 \sin \theta_1 = n_2 \sin \theta_2 \implies n_1 \theta_1 = n_2 \theta_2 \quad (\text{small-angle}) \quad (4.23)$$

With small-angle relations $\alpha \approx s/o$, $\beta \approx s/r$, $\gamma \approx s/i$ (where s is the height of the ray hit on the surface),

$$\beta = \frac{n_1 \theta_1}{n_2} + \gamma = \frac{n_1}{n_2}(\alpha + \beta) + \gamma \quad (4.24)$$

Substituting α, β, γ and simplifying:

$$\boxed{\frac{n_1}{o} + \frac{n_2}{i} = \frac{n_2 - n_1}{r}} \quad (4.25)$$

4.12 Thin Lens (Two Refracting Surfaces)

Combining two refracting surfaces (in the thin-lens approximation, lens thickness much less than other distances) takes much more work but yields the **lensmaker's equation**:

$$\boxed{\frac{1}{o} + \frac{1}{i} = (n - 1) \left(\frac{1}{r'} - \frac{1}{r''} \right)} \quad (4.26)$$

where r' is the radius of the first surface and r'' that of the second. Same sign rules for i, r', r'' as for the single refracting surface above.

In the form $\frac{1}{o} + \frac{1}{i} = \frac{1}{f}$, the focal length is $\frac{1}{f} = (n - 1) \left(\frac{1}{r'} - \frac{1}{r''} \right)$.

4.13 Rules for Making Images with Lenses

Converging Lens

F_1 = first focal point (on the incident side); F_2 = second focal point (on the far side).

Three principal rays:

1. Light parallel to the optic axis $\rightarrow$ refracts through F_2 .
2. Light through the lens center $\rightarrow$ undeflected.
3. Light through $F_1 \rightarrow$ comes out parallel to the optic axis.

For an object outside the focal length, the converging lens produces a **real, inverted** image.

Diverging Lens

Light parallel to the optic axis diverges on a trajectory that, traced backward, appears to come from F_1 on the incident side.

The diverging lens always produces a **virtual, erect** image (for a real object).


Lecture Pages (Unit 12)

This construction, while visual and geometric, accurately describes the 3-d wave solution of the traveling wave equation. It will be useful when we study diffraction and interference.

Ray Optics = ~~Geometric~~ Geometric Optics: Unit 12

Another representation very useful in optics is to consider rays as lines which propagate perpendicular to a wave front.

Spherical
Source



we simply draw rays perpendicular to the Huygen's wave fronts.

Plane waves





Figure 4.1: *
Unit 12, page 01

The Huygens's construction Explains the Alteration of the path of light when it changes from one medium to another. The normals to the wavefront are called rays, and are used to formulate geometric optics, often easier to use than the wavefronts.

Key: The speed of light in a medium is c/n where n is the index of refraction of the medium and in vacuum $n \equiv 1$. in Air $n = 1.0003$.

Each wavelet on the front advances in steps of Δt , but in medium n_2 , $v_2 = c/n_2$


$$\sin \theta_2 = \frac{v_2 \Delta t}{L} = \frac{c \Delta t / n_2}{L} \quad ; \quad \sin \theta_1 = \frac{v_1 \Delta t}{L} = \frac{c \Delta t / n_1}{L}$$

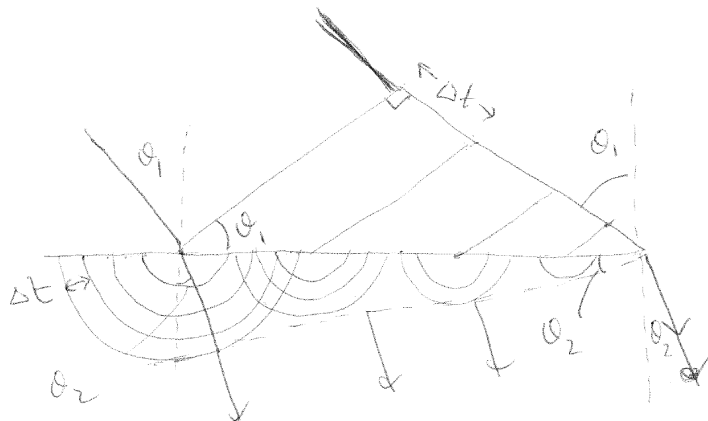

$$\Rightarrow n_2 \sin \theta_2 = n_1 \sin \theta_1$$

Figure 4.2: *
Unit 12, page 02

Example: light into glass
 $n_{\text{glass}} = 1.6$; $n_{\text{air}} = 1$
 $\theta_1 = 45^\circ$

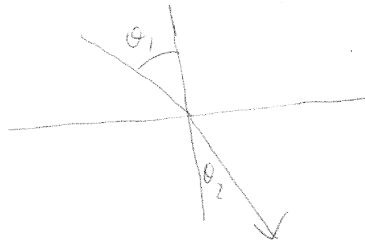


$$\sin \theta_1 = n_2 \sin \theta_2$$

$$\sin \theta_2 = \frac{\sin 45}{1.6} \Rightarrow \theta_2 = 26.2^\circ$$

For $n_2 > n_1$, light bends towards normal
 For $n_2 < n_1$, light bends away from normal

Total internal reflection:


$\circ$ = light source

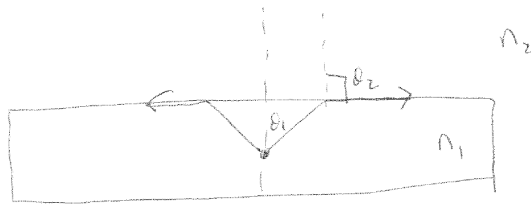

For $n_1 < n_2$, there is a critical angle θ_c where
 $n_1 \sin \theta_c = n_2 \sin 90$ $\sin \theta_c = n_2 / n_1$
 For $\theta_1 > \theta_c$ no light escapes the medium

Figure 4.3: *
 Unit 12, page 03

Fiber Optics

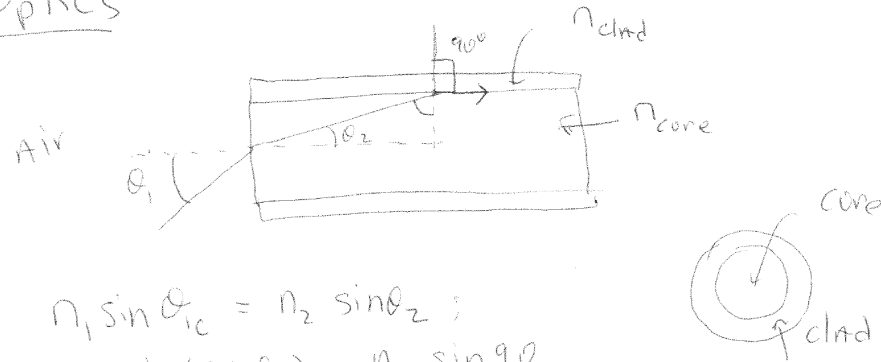

$$n_1 \sin \theta_{1c} = n_2 \sin \theta_2 ;$$

$$n_2 \sin(90 - \theta_2) = n_3 \sin 90$$

$$n_1 = 1 ; n_2 = n_{\text{core}} ; n_3 = n_{\text{clad}}$$

$$\sin \theta_{1c} = n_{\text{core}} \sin \theta_2$$

$$n_{\text{core}} \cos \theta_2 = n_{\text{clad}} \Rightarrow \theta_2$$


$$n_{\text{core}} \sin \theta_2 = n_{\text{core}} \left[1 - \left(\frac{n_{\text{clad}}}{n_{\text{core}}} \right)^2 \right]^{1/2} = \sqrt{n_{\text{core}}^2 - n_{\text{clad}}^2}$$

$$\sin \theta_{1c} = \sqrt{n_{\text{core}}^2 - n_{\text{clad}}^2}$$

Telecommunication fiber: Clad pure silica $n = 1.445$
 core silica doped with GeO_2 $n = 1.450$

For $\theta_1 > \theta_{1c}$ light goes into clad
 For $\theta_1 < \theta_{1c}$ light is totally internally reflected

Figure 4.4: *
 Unit 12, page 04

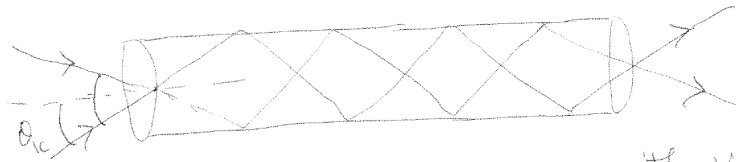

The light can be transmitted with very low loss

$\sin \theta_{ic} \equiv NA = \text{numerical aperture}$

$$\Delta\Omega = \text{cone angle of acceptance} \\ = 2\pi(1 - \cos\theta_{ic}) = 2\pi(1 - \sqrt{1 - (NA)^2})$$


$$\text{For } NA \ll 1 \quad \Delta\Omega \approx \pi (NA)^2$$

For telecom fiber $NA = 0.12$ or
 $\Delta\Omega = 0.045 \text{ sr.}$

Figure 4.5: *
 Unit 12, page 05

Flat mirrors:

Light reflects from surface. Angle of incidence equals angle of reflection.

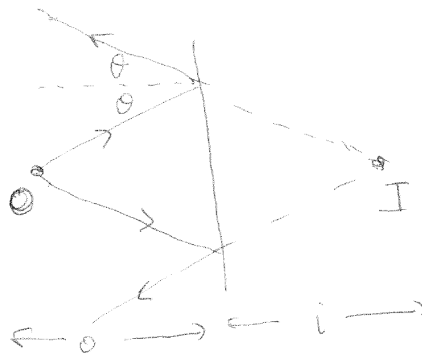

O = object (emitter)

I = virtual image

o = object-mirror distance

i = image-mirror distance


$-i = o$ [- sign to remind us it's a virtual image]



To our eye the diverging reflected rays appear to be from a source at I = virtual image

Figure 4.6: *
Unit 12, page 06

Curved Mirrors (Concave)

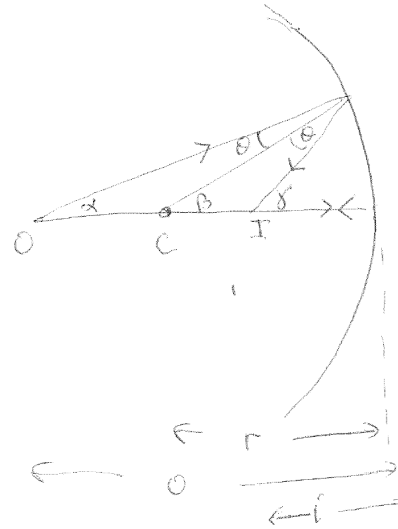

$I = \text{real image}$
 $O = \text{object}$
 $C = \text{origin of mirror radius of curvature}$
 $i = \text{image distance}$
 $o = \text{object distance}$
 $r = \text{radius of curvature}$

If $\alpha, \gamma \ll 1$ then purely from geometry you can show $\frac{1}{o} + \frac{1}{i} = \frac{2}{r}$

Define R-side = side of mirror real images form on
 V-side = side of mirror virtual images form on.

So in the above case the rule is

If I is on R-side $i > 0$

If I is on V-side $i < 0$

If C is on R-side $r > 0$

If C is on V-side $r < 0$

Figure 4.7: *
Unit 12, page 07

By Alternate exterior angles

$$\gamma = 2\theta + \alpha$$

$$\beta = \alpha + \theta$$

$$2\beta - \gamma = \alpha$$

$$\alpha = s/o ; \beta = s/r ; \gamma = s/i$$


$$\Rightarrow \frac{2s}{r} - \frac{s}{i} = s/o$$

$$\underline{\underline{\frac{1}{o} + \frac{1}{i} = \frac{2}{r}}}$$

Figure 4.8: *
Unit 12, page 08

Parallel light rays : Light focuses in the focal plane

on-axis source

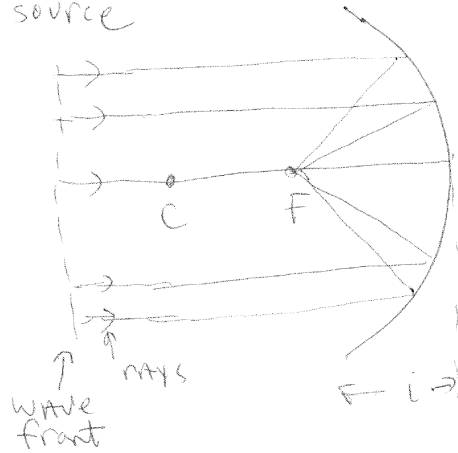


$$\frac{1}{i} + \frac{1}{o} = \frac{2}{r}$$

$$o \rightarrow \infty \rightarrow$$

$$i = r/2$$


off-axis source

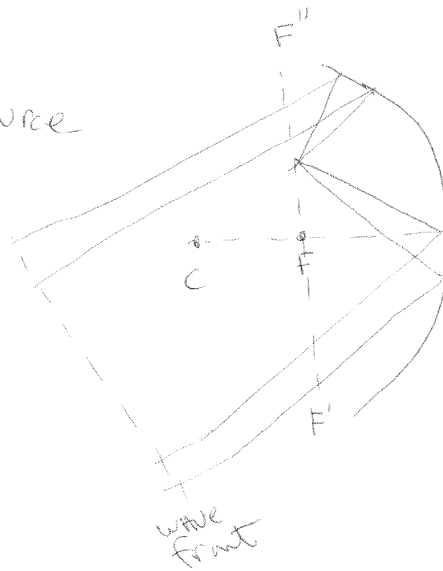

$$F' - F'' = \text{focal plane}$$

Figure 4.9: *
Unit 12, page 09

Images

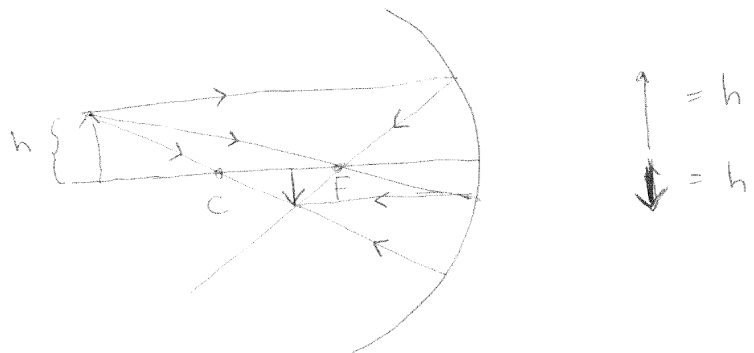

Rules = ray through C reflects back to C
 ray through F reflects parallel to optic axis
 ray parallel to optic axis goes through F

Note: since $i = r/2$ when $o \rightarrow \infty$, and this is where parallel light focuses, we call this the focal length $f \equiv r/2$ so we can write $\frac{1}{i} + \frac{1}{o} = \frac{1}{f}$


Geometry shows that the magnification

$$M = -i/o = h'/h$$

- sign indicates image is upside down from object

Figure 4.10: *
 Unit 12, page 10

Convex Mirror

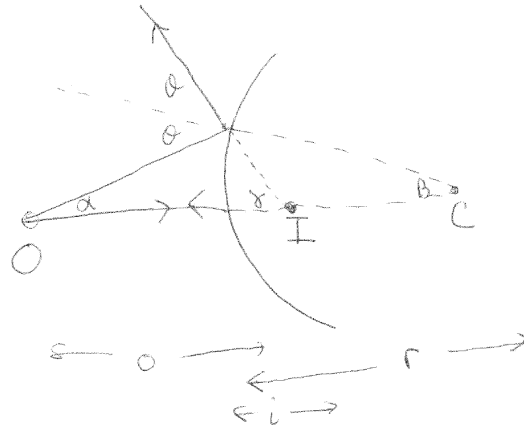

I on V-side $\Rightarrow i < 0$
 C on V-side $\Rightarrow r < 0$
 $r = 20 \text{ cm}$; $o = 14 \text{ cm}$ where is I ?
 $\frac{1}{o} + \frac{1}{i} = \frac{2}{r}$ $r = -20 \text{ cm}$
 $\frac{1}{14 \text{ cm}} + \frac{1}{i} = \frac{2}{-20 \text{ cm}} \Rightarrow i = -5.8 \text{ cm}$

Figure 4.11: *
Unit 12, page 11

SIGN RULES — LENSES vs MIRRORS

LENSES (Refraction)

(Signs defined by converging/diverging rays at each surface)

Object distance (o)

$o > 0$: incident rays at the surface are diverging (real object)

$o < 0$: incident rays are converging (virtual object)

Image distance (i)

$i > 0$: refracted rays are converging (real image)

$i < 0$: refracted rays are diverging (virtual image)

Radius of curvature (R)

$R > 0$: surface is convex as seen by the incoming light

$R < 0$: surface is concave as seen by the incoming light

MIRRORS (Reflection)

(Signs defined by which side real images form on — R/V rule)

Object distance (o)

$o > 0$: object on R-side (real object; in front of mirror)

$o < 0$: object on V-side (virtual object; behind mirror)

Image distance (i)

$i > 0$: image on R-side (real image; in front)

$i < 0$: image on V-side (virtual image; behind)

Radius of curvature (R)

$R > 0$: center of curvature on R-side (concave mirror)

$R < 0$: center on V-side (convex mirror)

Figure 4.12: *
Unit 12, page 12


Refracting Surface: Rules:

V-side = incident light side

R-side = side image forms on

$r < 0$ if C is on V-side; $r > 0$ if C on R-side

$i < 0$ if image on V-side; $i > 0$ if image on R-side

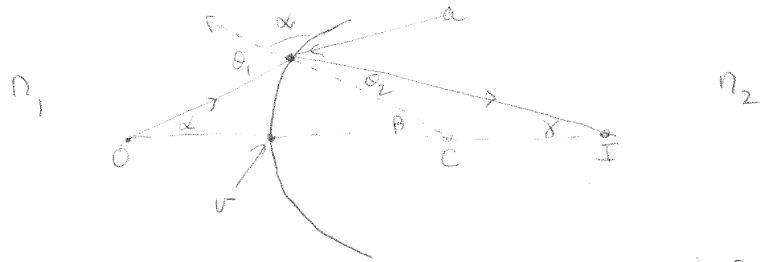

$$\theta_1 = \alpha + \beta; \beta = \theta_2 + \gamma; n_1 \sin \theta_1 = n_2 \sin \theta_2$$

In the small angle approximation

$$n_1 \theta_1 = n_2 \theta_2; \alpha \approx \frac{av}{o}; \beta \approx \frac{av}{r}; \gamma \approx \frac{av}{i}$$

$$\Rightarrow \beta = \frac{n_1 \theta_1}{n_2} + \gamma = \frac{n_1(\alpha + \beta)}{n_2} + \gamma$$

$$\text{Now sub for } \alpha, \beta, \gamma \Rightarrow \frac{n_1}{o} + \frac{n_2}{i} = \frac{n_2 - n_1}{r}$$

2-refracting surfaces: (thin lens approximation)

This takes much more work but yields


$$\frac{1}{o} + \frac{1}{i} = (n-1) \left(\frac{1}{r_1} - \frac{1}{r''} \right)$$

Same rules for i, r', r'' as for single surface

Figure 4.13: *

Unit 12, page 13

Rules for MAKING IMAGES

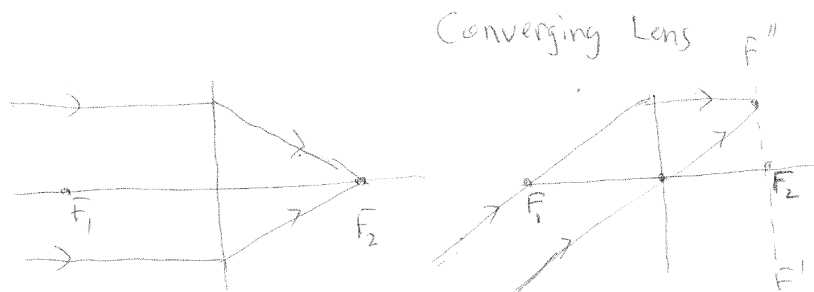


Light parallel to
optic axis $\rightarrow F_2$

Light through lens center
 $\rightarrow$ undeflected
Light through F_1 comes out
parallel to optic axis

$F_1 = 1^{st}$ focal point
 $F_2 = 2^{nd}$ focal point

Diverging Lens

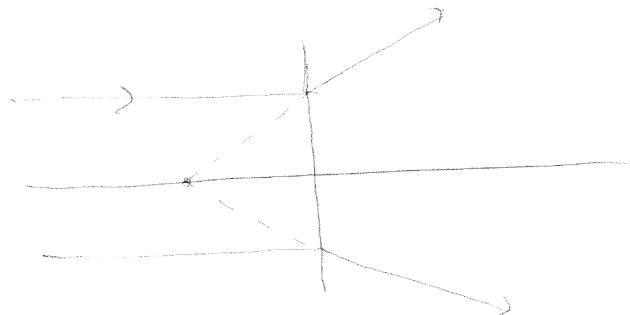

Light parallel to optic axis
Diverges on trajectory
back towards F_1

Figure 4.14: *
Unit 12, page 14

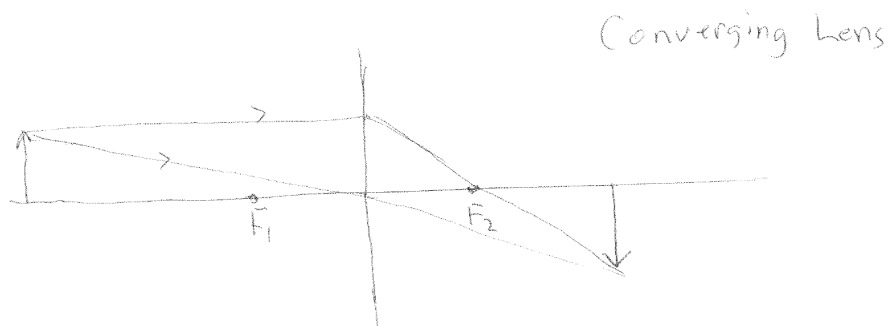


Image Real and Inverted

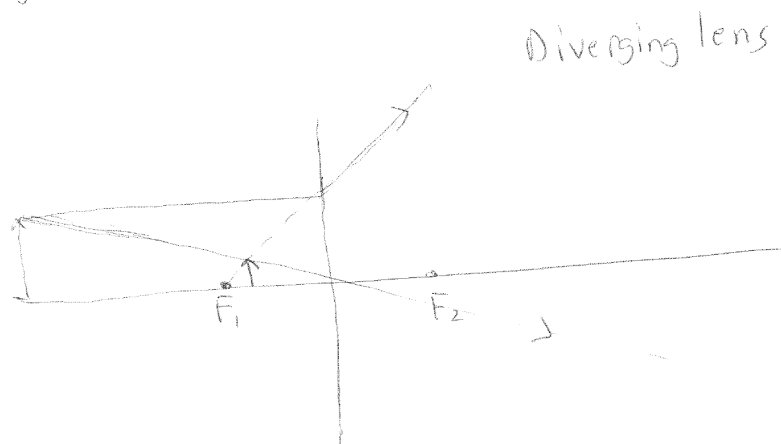


Image virtual and erect

Figure 4.15: *
Unit 12, page 15

Chapter 5

Diffraction and Interference

5.1 Optical Path Length

From Huygens' construction, we can define an advance of a wave in time Δt such that

$$\lambda = c \Delta t \quad \text{in vacuum} \quad (5.1)$$

i.e., the wave front advances by one wavelength in the period $\Delta t = T = \lambda/c$.

Wavelength in a Medium

In a medium of index of refraction n , the wave advances at speed c/n . So in the same time Δt ,

$$\lambda_n = \frac{c}{n} \Delta t \implies \frac{\lambda}{\lambda_n} = \frac{c \Delta t}{(c/n) \Delta t} = n \implies \boxed{\lambda_n = \frac{\lambda}{n}} \quad (5.2)$$

Check that frequency is unchanged. In vacuum $\lambda \nu = c$. In medium $\lambda_n \nu_n = v = c/n$. Then

$$\frac{\lambda \nu}{\lambda_n \nu_n} = \frac{c}{c/n} = n \quad (5.3)$$

With $\lambda/\lambda_n = n$, we get $\nu/\nu_n = 1$, so $\nu = \nu_n$.

So the frequency of a wave is unchanged in a medium, but the wavelength changes.

5.2 Optical Path Length and Phase Shift

Suppose we have a medium with index n_1 and thickness ℓ_1 . The number of wavelengths that fit inside is

$$N_1 = \frac{\ell_1}{\lambda_{n_1}} = \frac{n_1 \ell_1}{\lambda} \quad (5.4)$$

For another medium of index n_2 and thickness ℓ_2 :

$$N_2 = \frac{\ell_2}{\lambda_{n_2}} = \frac{n_2 \ell_2}{\lambda} \quad (5.5)$$

Define the optical path length

$$\boxed{\text{OPL} \equiv n\ell} \quad (5.6)$$

and the optical path length difference

$$\Delta \equiv (\text{OPL})_1 - (\text{OPL})_2 = n_1 \ell_1 - n_2 \ell_2 \quad (5.7)$$

If $\Delta = m\lambda$ (m integer), the waves emerge from the two media **in phase** — their maxima and minima overlap. The phase shift between the two waves is

$$\phi = 2\pi \frac{\Delta}{\lambda} = 2\pi \left(\frac{n_1 \ell_1 - n_2 \ell_2}{\lambda} \right) = k\Delta \quad (5.8)$$

In Phase / Out of Phase

If wave 1 is described by $E_1 = E_m \sin(kx - \omega t)$ and wave 2 by $E_2 = E_m \sin(kx - \omega t + \phi)$:

- If $\phi = 2m\pi$, $m = 0, 1, 2, \dots$: $\sin(kx - \omega t + 2m\pi) = \sin(kx - \omega t)$. The waves are **in phase** and $E_1 + E_2 = 2E_m$.
- If $\phi = (2m + 1)\pi$, equivalently $\phi = 2(m + \frac{1}{2})\pi$: $E_1 + E_2 = 0$. The waves are **out of phase** by π (180°).

5.3 A Useful Trick: Adding Waves with a Phase Shift

Let $\langle S \rangle \equiv I$ denote the intensity. From earlier,

$$I = \frac{c}{2} \varepsilon_0 E_m^2 \quad (5.9)$$

where E_m is the amplitude maximum of $\vec{E}$.

Direct Trig Approach

Consider $E = E_1 + E_2$ where

$$E_1 = E_m \sin(kx - \omega t), \quad E_2 = E_m \sin(kx - \omega t + \delta) \quad (5.10)$$

Using the sum-to-product identity $\sin A + \sin B = 2 \sin\left(\frac{A+B}{2}\right) \cos\left(\frac{A-B}{2}\right)$:

$$E = 2E_m \cos(\delta/2) \sin(kx - \omega t + \delta/2) \quad (5.11)$$

The intensity is

$$I = c\varepsilon_0 \langle E^2 \rangle = 4c\varepsilon_0 E_m^2 \cos^2(\delta/2) \langle \sin^2(kx - \omega t + \delta/2) \rangle \quad (5.12)$$

Using $\langle \sin^2 \rangle = 1/2$:

$$I = 2E_m^2 \cos^2(\delta/2) \times c\varepsilon_0/2 \quad (5.13)$$

(where the proportionality constant is absorbed.)

Complex Notation

We want to consider an imaginary traveling wave

$$E_1 = E_m e^{i(kx - \omega t)}, \quad E_2 = E_m e^{i(kx - \omega t + \delta)} \quad (5.14)$$

Euler's theorem: $e^{i\theta} = \cos \theta + i \sin \theta$, so $\text{Im}(e^{i\theta}) = \sin \theta$ and $\text{Re}(e^{i\theta}) = \cos \theta$. Our usual real solution is $E_1 = \text{Im}(E_m e^{i(kx - \omega t)})$, etc.

Adding:

$$E = E_1 + E_2 = E_m e^{i(kx - \omega t)} (1 + e^{i\delta}) \quad (5.15)$$

Now factor out $e^{i\delta/2}$:

$$1 + e^{i\delta} = e^{i\delta/2} (e^{-i\delta/2} + e^{i\delta/2}) = 2 e^{i\delta/2} \cos(\delta/2) \quad (5.16)$$

using $\cos \delta = (e^{i\delta} + e^{-i\delta})/2$. So

$$E = 2E_m \cos(\delta/2) e^{i(kx - \omega t + \delta/2)} \quad (5.17)$$

$$\text{Im } E = 2E_m \cos(\delta/2) \sin(kx - \omega t + \delta/2) \quad \checkmark \quad (5.18)$$

matching the trig result.

Intensity in Complex Notation

Look at $|E|^2 = EE^*$:

$$EE^* = 4E_m^2 \cos^2(\delta/2) \quad (5.19)$$

So we can use complex E provided we replace $\langle E^2 \rangle_{\text{real}}$ with $\frac{1}{2} EE^* = \frac{1}{2} |E|^2$:

$$\boxed{I = \langle S \rangle = \frac{1}{2} \epsilon_0 c |E|^2, \quad \frac{I}{I_0} = \frac{|E|^2}{|E_0|^2}} \quad (5.20)$$

all in complex notation.

5.4 Diffraction vs Geometric Optics

In geometric optics, light moves in a straight path in parallel bundles — a plane wave is represented by parallel rays.

Look at an “obstruction”: a hole in a screen, a slit, a lens, a disk, etc. Let a = hole size and λ = wavelength.

Case $a \gg \lambda$: Light passes through in parallel rays — geometric optics applies. The shape of the light beyond is the geometric projection of the hole.

Case $a \lesssim \lambda$: Light spreads out on passing through the hole. **This is diffraction.**

Criteria:

$$\boxed{\lambda \ll a \implies \text{geometric optics}, \quad \lambda \gtrsim a \implies \text{diffraction}} \quad (5.21)$$

Why Does Sound Turn Corners?

Hearing range: $\nu \sim 20$ Hz to 15 kHz, $v_{\text{sound}} = 330$ m/s, so $\nu\lambda = 330$ m/s. For a doorway of size $a \approx 1.5$ m, set $\lambda = a$:

$$\nu = \frac{v}{a} = \frac{330 \text{ m/s}}{1.5 \text{ m}} = 220 \text{ Hz} \quad (5.22)$$

For $\nu < 220$ Hz, $\lambda > a$, so we get diffraction of sound waves around the doorway. (This is why bass sounds bend around corners while higher frequencies do not.)

5.5 Young's Double-Slit Experiment

Two slits separated by distance d illuminated by light. Note the waves are interfering — adding or subtracting in space to the right of the slits.

In each slit the wavelets are in phase. It is easier to analyze with plane waves entering the slits, so use a pinhole at P a long way from the slits, or use a lens to collimate. Setup:

- Slits spaced d apart
- Screen distance D
- $\lambda \lesssim a$ (slit width) to ensure each slit diffracts (so that the wavelets spread out from each slit and overlap)

Path Difference and Phase Difference

Let ℓ_1 and ℓ_2 be the distances from the two slits to a point on the screen at angle θ from the central axis. For D large and θ small ($y/D \ll 1$), the rays ℓ_1 and ℓ_2 are approximately parallel. Then the path difference is

$$\Delta = \ell_2 - \ell_1 = d \sin \theta \quad (5.23)$$

and the phase difference is

$$\phi = k\Delta = \frac{2\pi}{\lambda} d \sin \theta \quad (5.24)$$

The two wave peaks are shifted in position relative to one another due to the path-length difference.

Intensity Pattern

Let $\phi = kd \sin \theta$ and write the two waves in complex form:

$$E_1 = E_m e^{i(kx - \omega t)}, \quad E_2 = E_m e^{i(kx - \omega t + \phi)} \quad (5.25)$$

$$E_1 + E_2 = E_m e^{i(kx - \omega t)} (1 + e^{i\phi}) = 2E_m \cos(\phi/2) e^{i(kx - \omega t + \phi/2)} \quad (5.26)$$

Single-slit intensity:

$$I_0 = K|E_1|^2 = KE_m^2 \quad (5.27)$$

Two-slit intensity:

$$I = K|E|^2 = 4KE_m^2 \cos^2(\phi/2) \quad (5.28)$$

$$\frac{I}{I_0} = 4 \cos^2\left(\frac{kd \sin \theta}{2}\right) = 4 \cos^2\left(\frac{\pi d \sin \theta}{\lambda}\right) \quad (5.29)$$

Intensity Maxima

Maxima occur where $\cos^2(\phi/2)$ has its maxima:

$$\frac{kd \sin \theta_m}{2} = m\pi \implies \frac{1}{2} \cdot \frac{2\pi}{\lambda} d \sin \theta_m = m\pi \quad (5.30)$$

$$m\lambda = d \sin \theta_m, \quad m = 0, 1, 2, \dots \quad (\text{maxima}) \quad (5.31)$$

At each θ_m we see maxima with $I(\theta_m) = 4I_0$.

Intensity Minima

Minima occur for $\cos^2(\phi/2) = 0$:

$$\frac{kd \sin \theta_m}{2} = (m + \frac{1}{2})\pi \quad (5.32)$$

$$(m + \frac{1}{2})\lambda = d \sin \theta_m, \quad m = 0, 1, 2, \dots \quad (\text{minima}) \quad (5.33)$$

Distance Between Adjacent Maxima on the Screen

Let y_m be the position of the m th maximum on the screen. Then $\tan \theta_m = y_m/D$, and for small θ_m :

$$m\lambda = d \sin \theta_m \approx d \tan \theta_m = \frac{dy_m}{D} \quad (5.34)$$

$$y_m = \frac{m\lambda D}{d} \quad (5.35)$$

$$\Delta y_m = y_{m+1} - y_m = \frac{\lambda D}{d} \quad (5.36)$$

5.6 Diffraction Gratings (N slits)

Used in spectroscopy. Consider N slits separated by d , each emitting a plane wave to a far point P at angle θ . Each slit has phase shift $\phi = kd \sin \theta$ relative to its adjacent neighbor, so the n th slit (counted from the central one as $n = 0$) has phase $n\phi$ relative to the central slit.

We must add the E-fields of all the slits at P , including the phase shifts:

$$E = \sum_{n=0}^{N-1} E_n, \quad E_n = E_0 e^{i\phi_n}, \quad \phi_n = n\phi = nkd \sin \theta \quad (5.37)$$

$$E = \sum_{n=0}^{N-1} E_0 e^{in\phi} \quad (5.38)$$

With single-slit intensity $I_0 = K|E_0|^2$, total intensity $I = K|E|^2$.

Geometric Series Trick

Use $\sum_{n=0}^{N-1} x^n = (1 - x^N)/(1 - x)$:

$$E = E_0 \sum_{n=0}^{N-1} e^{in\phi} = E_0 \frac{1 - e^{iN\phi}}{1 - e^{i\phi}} \quad (5.39)$$

Factor $e^{iN\phi/2}$ from numerator and $e^{i\phi/2}$ from denominator:

$$E = E_0 e^{i(N-1)\phi/2} \frac{e^{iN\phi/2} - e^{-iN\phi/2}}{e^{i\phi/2} - e^{-i\phi/2}} \quad (5.40)$$

Using $\sin x = (e^{ix} - e^{-ix})/(2i)$:

$$E = E_0 e^{i(N-1)\phi/2} \frac{\sin(N\phi/2)}{\sin(\phi/2)} \quad (5.41)$$

$$|E|^2 = E_0^2 \left(\frac{\sin(N\phi/2)}{\sin(\phi/2)} \right)^2, \quad \phi = kd \sin \theta \quad (5.42)$$

Check: $N = 2$ Recovers Two-Slit Result

$$|E|^2 = E_0^2 \left(\frac{\sin \phi}{\sin(\phi/2)} \right)^2 = \left(\frac{2 \sin(\phi/2) \cos(\phi/2)}{\sin(\phi/2)} \right)^2 E_0^2 = 4E_0^2 \cos^2(\phi/2) \quad (5.43)$$

$$\frac{I}{I_0} = 4 \cos^2 \left(\frac{kd \sin \theta}{2} \right) \quad \checkmark \quad (5.44)$$

Maxima of the N -slit Pattern

These occur where $\sin(\phi/2) = 0$ (where the denominator vanishes and L'Hôpital gives a maximum):

$$\frac{\phi}{2} = m\pi \implies \phi_m = 2\pi m, \quad \phi = 2\pi, 4\pi, 6\pi, \dots \quad (5.45)$$

Minima of the N -slit Pattern

These occur where $\sin(N\phi/2) = 0$ but $\sin(\phi/2) \neq 0$:

$$\frac{N\phi}{2} = p\pi \implies \phi_p = \frac{2\pi p}{N}, \quad p = 1, 2, \dots, N-1, N+1, \dots \quad (5.46)$$

The values $p = 0, N, 2N, \dots$ correspond instead to principal maxima.

Secondary Maxima

These are at $\frac{N\phi}{2} = (p + \frac{1}{2})\pi$.

Width of a Principal Peak

The m th principal peak is at $\phi = 2\pi m$ (or equivalently $p = mN$ in the minima index). It is bracketed by minima at $p = mN \pm 1$:

$$\Delta\phi = \frac{2\pi(mN+1)}{N} - \frac{2\pi(mN-1)}{N} = \frac{4\pi}{N} \quad (5.47)$$

The half-width is

$$\Delta\phi_{1/2} = \frac{2\pi}{N} \quad (5.48)$$

Spectral Resolution

To resolve two spectral lines at λ_1 and $\lambda_2 = \lambda_1 + \Delta\lambda$, they will occur at angular separation $\delta\theta$:

$$m \Delta\lambda = d \cos \theta \delta\theta \quad (\text{differentiating } m\lambda = d \sin \theta) \quad (5.49)$$

To resolve them, the angular separation must be of order the line width of the m th peak. In θ -space, the half-width condition $(\Delta\phi)_{1/2} = 2\pi/N = kd \cos \theta \delta\theta$ gives

$$\delta\theta = \frac{\lambda}{Nd \cos \theta} \quad (5.50)$$

So we can resolve two lines of separation

$$m \Delta\lambda = d \cos \theta \delta\theta = \frac{d \cos \theta \lambda}{Nd \cos \theta} = \frac{\lambda}{N} \quad (5.51)$$

$$\boxed{\frac{\lambda}{\Delta\lambda} = mN \quad (\text{resolving power of an } N\text{-slit grating})} \quad (5.52)$$

This is useful for resolving close spectral lines as close as $\Delta\lambda = \lambda/(mN)$, limited by the grating line widths.

Peak Brightness Scales as N^2

For $\phi/2 \rightarrow m\pi$, both $\sin(N\phi/2)$ and $\sin(\phi/2)$ go to zero, but

$$\sin(N\phi/2) \rightarrow N\phi/2, \quad \sin(\phi/2) \rightarrow \phi/2 \quad (5.53)$$

so the ratio $\rightarrow N$ and $|E|^2 \rightarrow N^2 E_0^2$:

$$\boxed{I_{\max} = N^2 I_0 \quad (N\text{-slit grating})} \quad (5.54)$$

The peaks are much brighter than for a 2-slit pattern.

5.7 Thin Films

Light from a source S hits the eye after reflecting off both the top and bottom surfaces of a thin film of index n (e.g., oil on water, soap bubble, AR coating). Rays 1 and 2 (top reflection, bottom reflection) interfere; consider near-normal incidence.

Phase Shifts Induced by Reflection

Rule 1: If light reflects off an interface from medium n_1 to medium n_2 with $n_2 > n_1$, the reflected light suffers a phase shift of π (180°).

That is, an incident wave $\sin(kx - \omega t)$ becomes $\sin(kx + \omega t + \pi) = -\sin(kx + \omega t)$ on reflection.

Rule 2: If light reflects from an interface with $n_2 < n_1$, there is *no* phase shift.

$$\sin(kx - \omega t) \rightarrow \sin(kx + \omega t) \quad (n_2 < n_1) \quad (5.55)$$

Example: Thin Film on Air

Film of index n and thickness d in air. The beam splits in two:

- Ray 1: reflects off top (air $\rightarrow$ film, $n > 1$) $\rightarrow$ phase shift π . So $\phi_2 = \pi$. (*Note: this is the "second" ray in the lecture's labeling — reflected at the top.*)
- Ray 1 (going through): travels into the film, reflects off bottom (film $\rightarrow$ air, $n_2 < n_1$) $\rightarrow$ no phase shift. Travels through extra distance $2d$ in the film, picking up phase from the OPL:

$$\phi_1 = \frac{2\pi}{\lambda}(\text{OPL}) = \frac{2\pi}{\lambda}(2nd) \quad (5.56)$$

$$\phi_2 = \pi \quad (5.57)$$

Constructive interference ($\phi_1 - \phi_2 = 2m\pi$):

$$\frac{2\pi(2nd)}{\lambda} - \pi = 2m\pi \implies 2nd = \left(m + \frac{1}{2}\right) \lambda \quad (5.58)$$

$$\boxed{2nd = \left(m + \frac{1}{2}\right)\lambda \quad (\text{constructive})} \quad (5.59)$$

Destructive interference ($\phi_1 - \phi_2 = (2m + 1)\pi$):

$$\frac{2\pi(2nd)}{\lambda} - \pi = (2m + 1)\pi \implies 2nd = (m + 1)\lambda \quad (5.60)$$

$$\boxed{2nd = (m + 1)\lambda \quad (\text{destructive}), \quad m = 0, 1, 2, \dots} \quad (5.61)$$

Worked Example: Oil Slick at a Gas Station

$n_{\text{oil}} = 1.48$, $n_{\text{air}} = 1$, $n_{\text{water}} = 1.33$. The oil sits on water with air above. At the air/oil top: $n_2 > n_1$, phase shift π . At the oil/water bottom: $n_2 = 1.33 < 1.48 = n_1$, so no phase shift. So the same as the film-on-air situation:

$$\phi_1 = \frac{2\pi}{\lambda}(2nd), \quad \phi_2 = \pi, \quad 2nd = \left(m + \frac{1}{2}\right)\lambda \quad (\text{constructive}) \quad (5.62)$$

For a 1000 Å oil slick on water, the $m = 0$ constructive wavelength is

$$\lambda = 4nd = 4(1.48)(1000 \text{ Å}) = 5920 \text{ Å} \implies \text{violet light} \quad (5.63)$$

Anti-Reflection (AR) Coatings

A thin layer of MgF_2 ($n = 1.38$) on glass ($n = 1.5$). At both interfaces (air→ MgF_2 and MgF_2 →glass), $n_2 > n_1$, so *both* reflections suffer a π phase shift. The two π shifts cancel, leaving only the OPL contribution:

$$\phi_1 = \frac{2\pi(2nd)}{\lambda} + \pi, \quad \phi_2 = \pi \quad (5.64)$$

$$\phi_1 - \phi_2 = \frac{2\pi(2nd)}{\lambda} \quad (5.65)$$

For **destructive** interference of the reflected light (so all light transmits):

$$\frac{2\pi(2nd)}{\lambda} = (2m + 1)\pi \implies \boxed{2nd = \left(m + \frac{1}{2}\right)\lambda \quad (\text{destructive, AR})} \quad (5.66)$$

For an AR coating optimized at $\lambda = 5500 \text{ Å}$ (the peak of white light) with $n = n_{\text{MgF}_2} = 1.38$ and $m = 0$:

$$d = \frac{\lambda}{4n} = \frac{5500 \text{ Å}}{4 \times 1.38} = 1000 \text{ Å} \quad (5.67)$$


A 1000 Å MgF_2 coating will do the trick.

Lecture Pages (Unit 13)

Diffraction and Interference

Optical Path Length:

From Huygen's we see that we can define an advance of a wave in time Δt such that $\lambda = c \Delta t$ in vacuum.



In index of refraction medium n we have the wave advancing $\frac{c}{n} \Delta t$



or $\lambda_n = \frac{c}{n} \Delta t$ so

$$\frac{\lambda}{\lambda_n} = \frac{c \Delta t}{\frac{c}{n} \Delta t} \Rightarrow \lambda_n = \lambda / n$$

Then $\lambda v = c$; $\lambda_n v_n = v \Rightarrow \frac{\lambda}{\lambda_n} \frac{v}{v_n} = \frac{c}{v} = n$

$$\Rightarrow v = v_n$$


So the frequency of a wave is unchanged in a medium, but the wavelength changes.

Figure 5.1: *
Unit 13, page 01

Suppose we have a medium where the index of refraction is n_1 and thickness l_1 . Then we can fit $N_1 = l_1 / \lambda_{n_1} = \frac{n_1 l_1}{\lambda}$ waves into the medium.

For another medium of index n_2 and thickness l_2 we can fit $N_2 = \frac{l_2}{\lambda_{n_2}} = \frac{n_2 l_2}{\lambda}$ waves.

Let us define the optical path length $OPL \equiv n l$ and the optical path length difference $\equiv \Delta = (OPL)_1 - (OPL)_2 = n_1 l_1 - n_2 l_2$

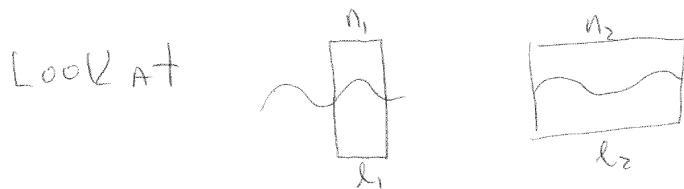

If $\Delta = m\lambda$ $m = \text{integer}$ then the waves will emerge from the medium in phase that is, maxima and minima of the waves in the 2 media will overlap

The phase shift between the waves will be $2\pi \times \Delta = 2\pi \frac{n_1 l_1}{\lambda} - \frac{n_2 l_2}{\lambda} = k \Delta = \phi$

Figure 5.2: *
Unit 13, page 02

If one wave is described by

$E_1 = E_m \sin(kx - \omega t)$ the 2nd wave will have

$$E_2 = E_m \sin(kx - \omega t + \phi)$$

If $\phi = 2m\pi$ $m = 0, 1, 2$ then

$$\sin(kx - \omega t + 2m\pi) = \sin(kx - \omega t)$$

We say E_1 and E_2 are in phase

$$E_1 + E_2 = 2E_m$$

If $\phi = 2(m + 1/2)\pi$ $m = 0, 1, 2, \dots$

$$\text{Then } E_1 + E_2 = 0$$

We say E_1 and E_2 are out of phase
by π or 180° .

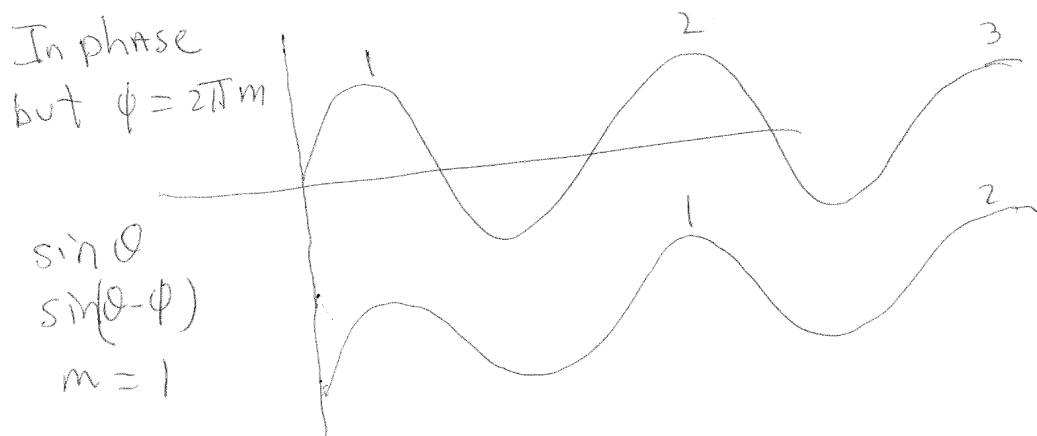


Figure 5.3: *
Unit 13, page 03

A useful trick

We will need to add EM waves with a phase shift.

Let's call $\langle S \rangle \equiv I$ the intensity.

Then we saw $I = \frac{c}{2} \epsilon_0 E_m^2$ where E_m is the Amplitude maximum of $\vec{E}$.

Math: consider this

$$E = E_1 + E_2; \quad E_1 = E_m \sin(Kx - \omega t) \\ E_2 = E_m \sin(Kx - \omega t + \delta)$$

By expansion of the $\sin(A+B) = \sin A \cos B + \cos A \sin B$

$$\Rightarrow E = E_m \times 2 \cos \delta/2 \sin(Kx - \omega t + \delta/2)$$

$$\text{and } I = \frac{c}{2} \epsilon_0 \langle E^2 \rangle = 4 \cos^2 \frac{\delta}{2} \langle \sin^2(Kx - \omega t + \delta/2) \rangle E_m^2$$

$$I = 2 E_m^2 \cos^2 \delta/2$$

we want to consider an imaginary traveling wave

$$E_1 = E_m e^{i(Kx - \omega t)}$$

$$E_2 = E_m e^{i(Kx - \omega t + \delta)}$$

Figure 5.4: *
Unit 13, page 04

Euler's Theorem $e^{i\theta} = \cos\theta + i\sin\theta$
 $\text{Im} e^{i\theta} = \sin\theta$; $\text{Re} e^{i\theta} = \cos\theta$

So we can write our usual solution as

$$E_1 = \text{Im} e^{i(kx - \omega t)}; E_2 = E_m \text{Im} e^{i(kx - \omega t + \delta)}$$

Using this $E = E_1 + E_2 = e^{i(kx - \omega t)} (1 + e^{i\delta}) E_m$
 $= 2 \cos \delta/2 e^{i(kx - \omega t + \delta/2)} E_m$ And

$$\text{Im} E = 2 \cos \delta/2 \sin(kx - \omega t + \delta/2) E_m \quad \checkmark$$

because $1 + e^{i\delta} = 2e^{i\delta/2} \left[\frac{e^{i\delta/2} + e^{-i\delta/2}}{2} \right] = 2e^{i\delta/2} \cos \delta/2$

$$\frac{e^{i\delta} + e^{-i\delta}}{2} = \cos \delta \text{ by Euler.}$$

What about I ? Look at $|E|^2 = EE^*$

$$E = e^{i(kx - \omega t + \delta/2)} 2 \cos \delta/2 E_m \text{ And } EE^*?$$

$$\Rightarrow EE^* = 4 \cos^2 \delta/2 E_m^2$$

So we can use complex E provided we replace $\langle E^2 \rangle_{\text{real}}$ with $1/2 EE^* = \frac{1}{2} |E|^2$

$$\Rightarrow I = \langle S \rangle = \frac{1}{2} \epsilon_0 c |E|^2 \text{ And}$$

$$\frac{I}{I_0} = \frac{|E|^2}{|E_0|^2} \text{ All in complex notation}$$

Figure 5.5: *
 Unit 13, page 05

Diffraction VS. Geometric Optics


In geometric optics, light moves in a straight path in parallel bundles



plane wave
parallel rays

Look At An "obstruction", a hole in a screen,
a slit in a screen, a lens, a disk ---


Let $a \gg \lambda$ $a = \text{hole size}$



light passes
through in parallel
rays = geometric
optics

Figure 5.6: *
Unit 13, page 06

$$a \lesssim \lambda$$

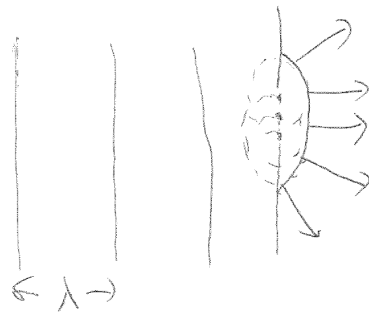

Light is spread
out on passing
through hole.
This is diffraction

Criteria: $\lambda \ll a \rightarrow$ geometric optics
 $\lambda \gtrsim a \Rightarrow$ diffraction

Why does sound turn corners?

Hearing ~~at~~ ~~20 Hz - 15 Hz~~ $\nu \sim 20 \text{ Hz} - 15 \text{ Hz}$

$$v_{\text{sound}} = 330 \text{ m/s} \quad \nu \lambda = 330 \text{ m/s} = v$$

$$\text{door } a \approx 1.5 \text{ m} \quad \lambda = a = \frac{v}{\nu} \quad \text{for}$$

$$\nu = \frac{v}{a} = \frac{330 \text{ m/s}}{1.5 \text{ m}} = 220 \text{ Hz} \quad \text{For } \nu > 220 \text{ Hz}$$

$\nu < 220 \text{ Hz} \quad \lambda > a \Rightarrow$ diffraction of
sound waves

Figure 5.7: *
Unit 13, page 07

Interference of Waves

Young's double-slit experiment



Note waves are interfering,
that is, Adding ~~or~~
subtracting in space
to right of ~~the slits~~
the slits


In the slits the wavelets are in phase
It is easier to analyze with plane waves
entering the slits so pinhole at P is a
long way from slits. Or use a lens



slits spaced d apart
Screen distance D

$\lambda \lesssim a$ to avoid
too much diffraction


Figure 5.8: *
Unit 13, page 08

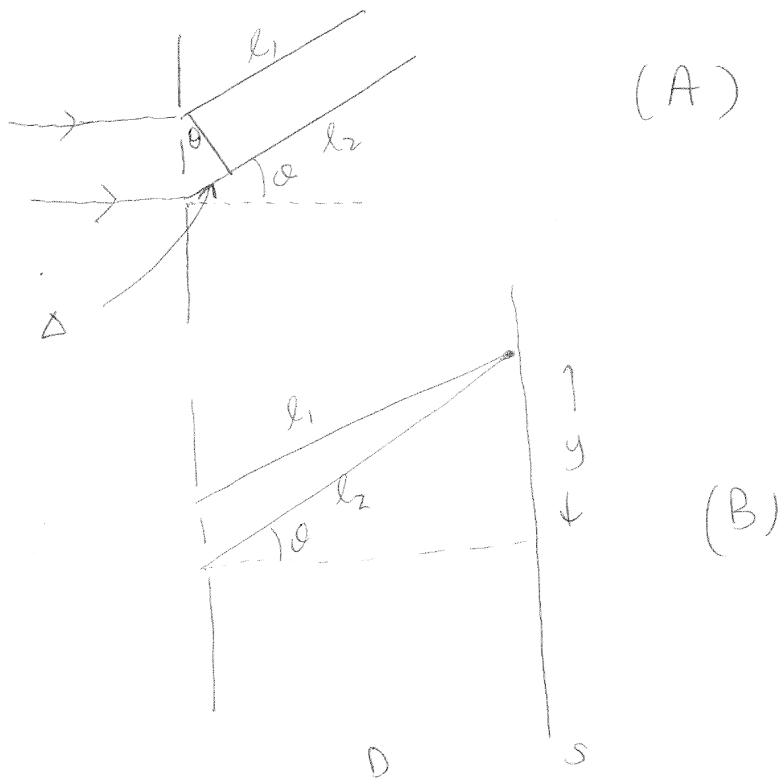

for D large and θ small ie $\frac{y}{D} \ll 1$
 Then l_1 is approximately parallel to l_2
 as shown in (A) above -

Then the path difference between l_1 and l_2 is
 $\Delta = l_2 - l_1 = d \sin \theta$ and the phase difference
 $k\Delta = \frac{2\pi}{\lambda} d \sin \theta$

Figure 5.9: *
 Unit 13, page 09



Peaks are shifted in position due to path length difference

Analysis: $\phi = kd \sin \theta$

Waves: $E_1 = E_m e^{i(kx - \omega t)}$

$E_2 = E_m e^{i(kx - \omega t + \phi)}$

$$E_1 + E_2 = E = E_m e^{i(kx - \omega t)} (1 + e^{i\phi})$$

$$= E_m e^{i(kx - \omega t + \phi/2)} (e^{i\phi/2} + e^{-i\phi/2})$$

$E = 2 E_m \cos \phi/2 e^{i(kx - \omega t + \phi/2)}$

$I_0 = K |E_1|^2 = K |E_2|^2 = K E_m^2 = \text{intensity through each slit.}$

$I = K |E|^2 = 4 K E_m^2 \cos^2 \phi/2$

$I/I_0 = 4 \cos^2 \left(\frac{kd \sin \theta}{2} \right)$

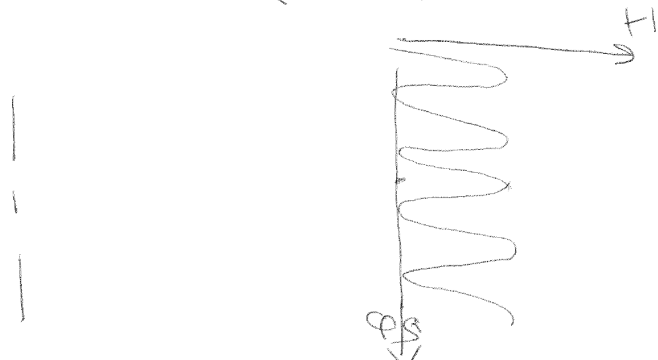


Figure 5.10: *
Unit 13, page 10

Where are the intensity maxima?

They occur where $\cos^2 \phi/2$ has maxima or

$$\frac{k d \sin \theta_m}{2} = m\pi \quad m = 0, 1, 2, \dots$$

$$\frac{1}{2} \frac{2\pi}{\lambda} d \sin \theta_m = m\pi \Rightarrow m\lambda = d \sin \theta_m \quad \text{maxima}$$

So for every $\theta = \theta_m$ we see maxima in intensity on the screen. And $I(\theta_m) = 4 I_0$

Where are the intensity minima?

These occur for $\cos^2 \phi/2 = 0$ or


$$\frac{k d \sin \theta}{2} = (m + \frac{1}{2})\pi \quad m = 0, 1, 2, \dots$$

$$\text{or } \frac{1}{2} \frac{2\pi}{\lambda} d \sin \theta_m = (m + \frac{1}{2})\pi$$

$$(m + \frac{1}{2})\lambda = d \sin \theta_m \quad m = 0, 1, 2 \quad \text{minima}$$

Figure 5.11: *
Unit 13, page 11

what is distance between adjacent maxima on the screen?

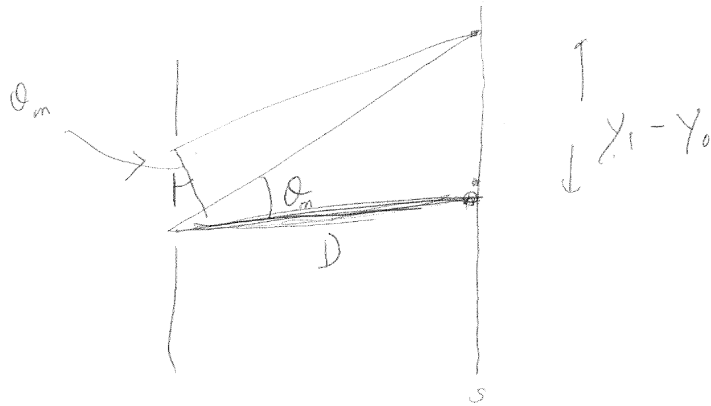

$$\tan \theta_m \approx y_m / D$$

$$m\lambda = d \sin \theta_m \approx d \tan \theta_m \quad \text{for } \theta_m \text{ small}$$

$$m\lambda \approx d \tan \theta_m = d y_m / D$$

$$y_m = m \frac{\lambda D}{d}$$


$$y_{m+1} - y_m = (m+1) \frac{\lambda D}{d} - m \frac{\lambda D}{d}$$

$$y_{m+1} - y_m = \Delta y_m = \frac{\lambda D}{d}$$

Figure 5.12: *
Unit 13, page 12

Diffraction Gratings

Used in spectroscopy - N slits



Each slit has $\phi = Kd \sin \theta$ for its shift from the adjacent slit but $(N-1)Kd \sin \theta$ from the central slit. We must add up the E -fields of all the slits at P , including the phase shifts:

$$E = \sum_{n=0}^{N-1} E_n \quad ; \quad E_n = e^{i\phi_n} \quad ; \quad \phi_n = n Kd \sin \theta \equiv n \phi$$

$$\Rightarrow E = \sum_{n=0}^{N-1} E_0 e^{in\phi} \quad ; \quad \phi = Kd \sin \theta$$

$$\text{Also } I_0 = K |E_0|^2 = K E_0^2 \quad (1 \text{ slit})$$

$$I = K |E|^2$$

Figure 5.13: *
Unit 13, page 13

Trick: $\sum_{n=0}^{N-1} x^n = \frac{1-x^N}{1-x}$ so

$$E = E_0 \sum_{n=0}^{N-1} e^{in\phi} = E_0 \left[\frac{1-e^{iN\phi}}{1-e^{i\phi}} \right]$$

$$= E_0 e^{iN\phi/2} e^{i\phi/2} \frac{e^{iN\phi/2} - e^{-iN\phi/2}}{e^{i\phi/2} - e^{-i\phi/2}}$$

$$\sin x = \frac{e^{ix} - e^{-ix}}{2i} \Rightarrow$$

$$E = E_0 e^{i(N+1)\phi/2} \frac{\sin N\phi/2}{\sin \phi/2} \quad \phi = kd \sin \theta$$

$$|E|^2 = E_0^2 \left(\frac{\sin \frac{N\phi}{2}}{\sin \phi/2} \right)^2$$

For $N=2$, 2-slits we recover our result of

$$|E|^2 = E_0^2 \left(\frac{\sin \phi}{\sin \phi/2} \right)^2 = \left(\frac{2 \sin \phi/2 \cos \phi/2}{\sin \phi/2} \right)^2 E_0^2$$

$$|E|^2 = 4E_0^2 \cos^2 \frac{kd \sin \theta}{2} \quad \text{or}$$

$$I/I_0 = \cos^2 \frac{kd \sin \theta}{2} \quad \checkmark$$

where are the maxima of the N -slit pattern?

They occur where $\sin \phi/2 = 0$ or $\frac{\phi}{2} = m\pi \Rightarrow$


$$\phi_m = 2\pi m \quad ; \quad \phi = 2\pi, 4\pi, 6\pi, \dots$$

Figure 5.14: *
Unit 13, page 14

The minima of the N -slit pattern is at

$$\frac{N\phi}{2} = p\pi \text{ or } \phi_p = \frac{2\pi p}{N}; \quad \frac{2\pi}{N}, \frac{4\pi}{N}, \frac{6\pi}{N} \dots$$

The secondary maxima are at $\frac{N\phi}{2} = (p + \frac{1}{2})\pi$

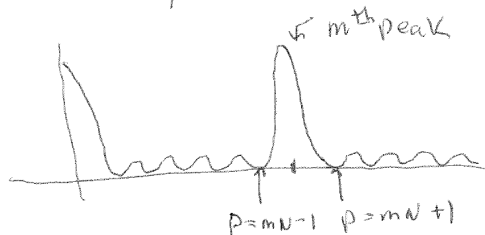

The m th peak is at $p = mN$ and is bracketed by the $p = mN \pm 1$ minima so the width minimum to minimum is $\Delta\phi = 2\pi \frac{(mN+1)}{N} - 2\pi \frac{(mN-1)}{N} = \frac{4\pi}{N}$

And the $\frac{1}{2}$ width is $\Delta\phi_{1/2} = \frac{2\pi}{N}$

I want to resolve spectral lines at separation

$\lambda_1, \lambda_2 = \lambda_1 + \Delta\lambda$. They will occur at


Angular separation

$$m \Delta\lambda = d \cos\theta \Delta\theta$$

To resolve these lines must be of order the line width of the m th peak

Figure 5.15: *
Unit 13, page 15

The intensity peaks

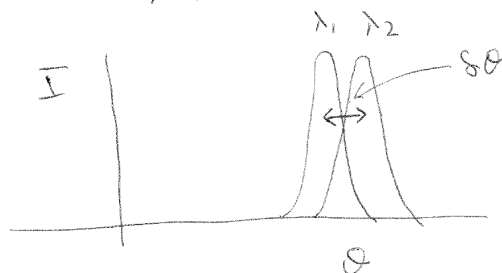

in θ -space this $(\Delta\phi)_m = \frac{2\pi}{N} = kd \cos\theta \delta\theta$

$$\text{or } \delta\theta = \frac{\lambda}{Nd \cos\theta}$$

So we can resolve 2 lines of separation

$$m\Delta\lambda = d \cos\theta \delta\theta = \frac{d \cos\theta \lambda}{Nd \cos\theta} = \frac{\lambda}{N}$$

$\Rightarrow$ The resolution of the N -slit grating is

$$\frac{\lambda}{\Delta\lambda} = mN \gg 1$$

So this is useful for resolving close spectral lines as close as $\Delta\lambda = \frac{\lambda}{mN}$ limited by

the grating line widths.

Note peaks are brighter than 2-slit pattern


For $\phi/2 \rightarrow m\pi \Rightarrow \text{maximum } \left(\frac{\sin N\phi/2}{\sin\phi/2}\right)^2 \rightarrow N^2$

$$\sin \frac{N\phi}{2} \rightarrow \frac{N\phi}{2} \cdot \frac{\sin}{\sin\phi/2} \rightarrow \phi/2 \quad \text{since } \frac{\sin N\phi/2}{\sin\phi/2} \rightarrow N$$

$\Rightarrow I \approx N^2 I_0$ for N -slit grating

Figure 5.16: *
Unit 13, page 16

Thin Films

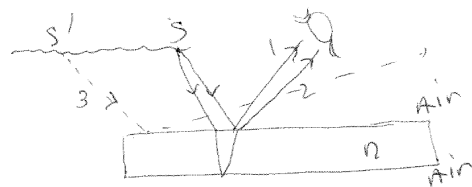


Light from S hits eye at near normal incidence for rays 1, 2. Ray 3 misses eye.

Look at interference for near normal incidence.

Phase shifts induced by reflection:

Rule 1: If light reflects off interface with indices n_1/n_2 , if $n_2 > n_1$ the reflected light suffers a phase shift of π (180°)

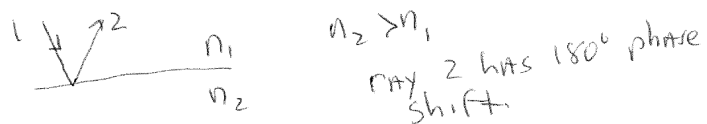

If $\sin(kx - \omega t)$ on 1
 $\Rightarrow \sin(kx + \omega t + \pi) = -\sin(kx - \omega t)$ on reflection

Figure 5.17: *
 Unit 13, page 17


Rule 2: If light reflects from an interface with indices n_1, n_2 and $n_2 < n_1$, there is no phase shift



$$\sin(kx - \omega t) \quad (1)$$

$$\sin(kx + \omega t) \quad (2)$$

Example



The beam split in 2.

$$\phi_1 = 2\pi \times (\text{OPL}) = \frac{2\pi}{\lambda} (2nd)$$

$$\phi_2 = \pi$$

To get constructive interference we need

$$\phi_1 - \phi_2 = \frac{2\pi}{\lambda} (2nd) - \pi = 2m\pi \quad m=0,1,2$$

$$2nd = \frac{(2m+1)\lambda\pi}{2\pi}$$

$$\Rightarrow 2nd = \left(m + \frac{1}{2}\right)\lambda$$

constructive interference

For destructive interference


$$2nd \times \frac{2\pi}{\lambda} - \pi = (2m+1)\pi \quad m=0,1,2,\dots$$

$$2nd = \frac{(2m+2)\pi\lambda}{2\pi} = (m+1)\lambda$$

$$2nd = (m+1)\lambda \quad m=0,1,2,\dots$$

Figure 5.18: *
Unit 13, page 18

Oil slick at gas station

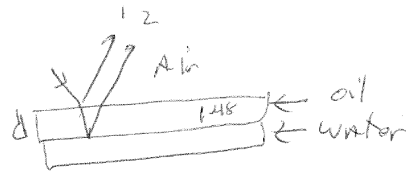

$$n_{\text{oil}} = 1.48$$

$$n_{\text{air}} = 1$$

$$n_{\text{water}} = 1.33$$

$$\phi_1 = \frac{2\pi}{\lambda} 2dn ; \phi_2 = \pi \quad \frac{2\pi}{\lambda} 2dn - \pi = 2m\pi$$


$$\Rightarrow 2dn = (m + \frac{1}{2})\lambda$$

For a $1000 \text{ \AA}$ oil slick on water

$$\lambda = 4dn = 2000 \text{ \AA} \times 1.48 \times 2 = 5920 \text{ \AA}$$

$\Rightarrow$ violet light

AR coatings

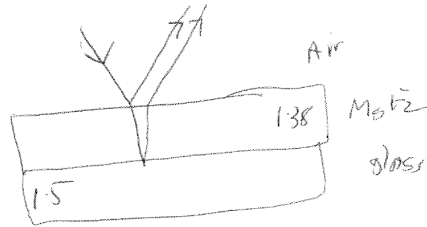

At both air- MgF_2 and MgF_2 -glass we have π phase shifts

$$\phi_1 = 2dn \frac{2\pi}{\lambda} + \pi \quad \phi_2 = \pi$$

$$\phi_1 - \phi_2 = 2dn \frac{2\pi}{\lambda} = (m + \frac{1}{2})\pi \quad \text{destructive}$$

$$2dn = (m + \frac{1}{2})\lambda$$

Figure 5.19: *
Unit 13, page 19

For an AR coating n_{coating} , at $5500 \text{ \AA}$ peak
of white light

$$2dn = (m + \frac{1}{2})\lambda$$

$$n = n_{\text{MgF}_2}$$

$$m = 0$$

$$\Rightarrow d = \frac{\lambda}{4n} = \frac{5500 \text{ \AA}}{4 \times 1.38} = 1000 \text{ \AA}$$

A $1000 \text{ \AA}$ MgF_2 coating will do the trick.

Figure 5.20: *
Unit 13, page 20

Chapter 6

Diffraction

6.1 Diffraction from First Principles

We saw that Huygens tells us to treat the wave front as composed of secondary wavelets. The total $\vec{E}$ -field at a distant point P is the sum of these wavelets, taking account of their phase shifts.

For a slit (or aperture) with source and screen far from the slit, we have **Fraunhofer diffraction** (the simplest case — effectively plane waves in and out).

6.2 Single-Slit Diffraction

Setup: Plane waves incident on a single slit of width a . Let x run across the slit. A wavelet at position x travels an extra distance $\Delta = x \sin \theta$ to reach P at angle θ , so its phase shift is

$$\phi(x) = k\Delta = kx \sin \theta \quad (6.1)$$

Sum the Wavelets

$$E_P = A \int_{-a/2}^{a/2} e^{-ikx \sin \theta} dx, \quad A = \text{constant} \quad (6.2)$$

This is just a sum of Huygens wavelets. The plane wave in the slit (for $\phi(x) = 0$, i.e. $\theta = 0$) is just

$$E_0 = A \int_{-a/2}^{a/2} dx = Aa \quad (6.3)$$

Doing the integral:

$$E_P = A \frac{e^{-ika \sin \theta/2} - e^{ika \sin \theta/2}}{-ik \sin \theta} = Aa \frac{\sin(ka \sin \theta/2)}{(ka \sin \theta/2)} \quad (6.4)$$

Or

$$\boxed{E_P = E_0 \frac{\sin(ka \sin \theta/2)}{(ka \sin \theta/2)}} \quad (6.5)$$

$$\boxed{\frac{I}{I_0} = \frac{|E_P|^2}{|E_0|^2} = \left(\frac{\sin(ka \sin \theta/2)}{ka \sin \theta/2} \right)^2} \quad (6.6)$$

This is the **single-slit diffraction pattern**.

Minima of $I(\theta)$

These occur where $\sin(ka \sin \theta_m/2) = 0$ but the argument is nonzero:

$$\frac{ka \sin \theta_m}{2} = m\pi \implies \boxed{m\lambda = a \sin \theta_m, \quad m = 1, 2, 3, \dots \quad (\text{minima})} \quad (6.7)$$

Maxima of $I(\theta)$

The first (central) maximum is at $\theta = 0$, where $\frac{\sin x}{x} \rightarrow 1$ as $x \rightarrow 0$. The other maxima are approximately halfway between minima:

$$\frac{ka \sin \theta_m}{2} = (m + \frac{1}{2})\pi \implies \boxed{(m + \frac{1}{2})\lambda = a \sin \theta_m, \quad m = 1, 2, 3 \quad (\text{maxima besides } \theta = 0)} \quad (6.8)$$

Decay of Subsequent Maxima

For large m , the subsequent maxima have intensity

$$\frac{I(\theta_m)}{I_0} \approx \frac{1}{(m + \frac{1}{2})^2 \pi^2} \quad (6.9)$$

or simply $1/(m + \frac{1}{2})^2$ in the lecture's shorthand — so they die out very quickly.

6.3 Two-Slit Pattern with Single-Slit Diffraction Envelope

We can now revisit the 2-slit case where we have **interference** (between the 2 slits) *and* **diffraction** (within each individual slit). The combined intensity is

$$\boxed{\frac{I(\theta)}{I_0} = \left(\frac{\sin(ka \sin \theta/2)}{ka \sin \theta/2} \right)^2 \cos^2 \left(\frac{kd \sin \theta}{2} \right)} \quad (6.10)$$

where

- d = slit separation (sets the interference fringes)
- a = slit width (sets the diffraction envelope)

The closely spaced cosine fringes are modulated by the broad sinc envelope.

Aside: Diffraction as a Fourier Transform

We recognize from our 1-slit integral that the diffraction pattern is just the **Fourier transform of the aperture**.

6.4 Angular Resolution for a Circular Aperture

(This can be a mirror or a lens.)

For a circular aperture of radius R :

$$E \propto \iint_{x^2+y^2 \leq R^2} e^{-ik(x\theta_x + y\theta_y)} dx dy \quad (6.11)$$

where $\sin \theta_x \approx \theta_x$, $\sin \theta_y \approx \theta_y$, and $\theta^2 = \theta_x^2 + \theta_y^2$. This nasty integral can be done and yields

$$\boxed{\frac{I}{I_0} = \left[\frac{2J_1(kR\theta)}{kR\theta} \right]^2} \quad (6.12)$$

where J_1 is the first-order Bessel function. The pattern is the famous **Airy disk**: a central peak with concentric rings.

The first zero is at

$$\boxed{\theta_m = \frac{1.22\lambda}{D}, \quad D = 2R = \text{diameter of aperture}} \quad (6.13)$$

Spot Blurring

A point source S at distance r imaged by a circular aperture (lens or mirror) of diameter D produces a spot blurred to size

$$\Delta s = \frac{1.22\lambda r}{D} \quad (6.14)$$

Hubble Mirror

Built originally for spy satellites: $D = 2.4$ m, $\lambda = 5 \times 10^{-7}$ m (green light), low Earth orbit $r = 400$ km $= 4 \times 10^5$ m. Then

$$\Delta s = r \frac{1.22\lambda}{D} = 0.1 \text{ m} = 10 \text{ cm} \quad (6.15)$$

In practice, atmospheric blurring degrades this somewhat.

MQ-9 Reaper Drone

$D \approx 0.3$ m, $r \approx 10$ km $= 33,000$ ft, $\lambda = 5 \times 10^{-7}$ m:

$$\Delta s = 2 \text{ cm} \quad (6.16)$$

Operating at $\approx 15,000$ ft, $\Delta s \approx 1$ cm — can recognize people.

Rayleigh Criterion

If two point sources are within θ_1 of each other, they are just resolvable when the central maximum of one falls on the first zero of the other:

$$\boxed{\theta_R = \frac{1.22\lambda}{D} \quad (\text{Rayleigh criterion})} \quad (6.17)$$

6.5 Michelson Interferometer — LIGO

Setup: A laser provides E_0 (intensity I_0) into a beam splitter. The beam splits, one beam to mirror M_1 (along leg of length L_x), one to M_2 (along leg of length L_y). The reflected beams recombine at the beam splitter, with output going to a detector at the “dark port.”

Define:

- r_1 = reflection from beam splitter onto leg $1 \rightarrow M_1$

- r_2 = reflection from beam splitter after the beam reflects off M_2
- t = transmission through beam splitter; $t_1 = t_2$

Assume $r_{M_1} = r_{M_2} = 100\%$. Assume the beam splitter is coated on the front surface with a 50% reflector. (This is not strictly true for LIGO but gives the right phase shift in this simpler treatment.)

What is r_1 ?

Going from air to a dielectric ($1 < n$): a phase shift of π . Write it as $e^{-i\pi}$ in our complex traveling-wave representation:

$$r_1 = \frac{e^{-i\pi}}{\sqrt{2}}, \quad r_2 = \frac{1}{\sqrt{2}} \quad (n \rightarrow 1, \text{ no phase shift}) \quad (6.18)$$

$$t_1 = t_2 = \frac{1}{\sqrt{2}} \quad (50\% \text{ transmitting}) \quad (6.19)$$

Check: $E_{\text{out}} = \frac{1}{\sqrt{2}}E_{\text{in}}$, so $I_{\text{out}} = \frac{1}{2}KE_{\text{in}}^2 = I_{\text{in}}/2$.

Equal Arms: Dark Spot at Detector

Both beams pick up a phase shift ϕ at reflection from M_1/M_2 , but the relative shift is 0, so we ignore it. Start with $L_x = L_y$. Let E_1, E_2 be the E-fields entering the detector from legs 1, 2:

$$E_1 = t_1 r_1 E_0 = \frac{1}{\sqrt{2}} \cdot \frac{1}{\sqrt{2}} e^{-i\pi} E_0 = \frac{1}{2} e^{-i\pi} E_0 \quad (6.20)$$

$$E_2 = r_2 t_2 E_0 = \frac{1}{2} E_0 \quad (6.21)$$

$$E_1 + E_2 = \frac{1}{2} E_0 e^{i(kx - \omega t)} [1 + e^{-i\pi}] = 0 \quad (6.22)$$

There is a dark spot at the detector — no light. It all went back to the laser!

Unequal Arms

The phase shift in each leg is

$$\phi_1 = \frac{2\pi}{\lambda} \cdot 2L_x, \quad \phi_2 = \frac{2\pi}{\lambda} \cdot 2L_y \quad (6.23)$$

The factor of 2 is because the light traverses the leg twice (beam splitter $\rightarrow M \rightarrow$ beam splitter). Now

$$E_1 = \frac{1}{2} E_0 e^{-i\pi} e^{i\phi_1}, \quad E_2 = \frac{1}{2} E_0 e^{i\phi_2} \quad (6.24)$$

Using $e^{-i\pi} = -1$:

$$E_1 + E_2 = \frac{1}{2} E_0 (e^{i\phi_2} - e^{i\phi_1}) = \frac{1}{2} E_0 e^{i(\phi_2 + \phi_1)/2} [e^{i(\phi_2 - \phi_1)/2} - e^{-i(\phi_2 - \phi_1)/2}] \quad (6.25)$$

$$= i E_0 e^{i(\phi_2 + \phi_1)/2} \sin\left(\frac{\phi_2 - \phi_1}{2}\right) = E_0 e^{i[(\phi_2 + \phi_1)/2 + \pi/2]} \sin\left(\frac{\Delta\phi}{2}\right) \quad (6.26)$$

using $e^{i\pi/2} = i$. Thus

$$\boxed{\frac{I}{I_0} = \frac{|E|^2}{E_0^2} = \sin^2\left(\frac{\Delta\phi}{2}\right), \quad \Delta\phi = \frac{2\pi}{\lambda} \cdot 2(L_2 - L_1) = \frac{4\pi(L_2 - L_1)}{\lambda}} \quad (6.27)$$

In reality there are 4 extra mirrors in the legs.

Fabry–Perot Cavity

These mirrors are highly reflecting, so they trap light for $N \approx 300$ round trips. This is called a **Fabry–Perot etalon**. So in fact the phase shift is

$$\Delta\phi = \frac{4\pi}{\lambda} N (L_2 - L_1), \quad N \approx 300 \quad (6.28)$$

6.6 Gravitational Waves and LIGO

The merger of two black holes makes a ripple in the fabric of space-time. This ripple is a **gravitational wave** and obeys a wave equation:

$$\frac{\partial^2 h_{\mu\nu}}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 h_{\mu\nu}}{\partial t^2} = 0 \quad (6.29)$$

Look familiar? h describes the distortion of our rulers in the presence of the GW.

The GW has the property that when it arrives with the proper orientation (polarization!) to the interferometer, it alters lengths in space-time. **The mirrors don't move — the rulers change.** Recipe: for $L_x = L_y = L$ before the wave (we'll get the dark spot),

$$L_x = L + \frac{h}{2}L = L(1 + h/2) \quad (6.30)$$

$$L_y = L - \frac{h}{2}L = L(1 - h/2) \quad (6.31)$$

$$L_2 - L_1 = L + \frac{h}{2}L - L + \frac{h}{2}L = hL = \Delta L \quad (6.32)$$

$$\Delta\phi = \frac{4\pi}{\lambda} N hL \quad (6.33)$$

LIGO Numbers

$N \approx 300$, $\lambda = 1.06 \mu\text{m}$ (Nd:YAG laser), $L = 4 \text{ km}$, $h \approx 10^{-21}$ (!).

The relative shift of the mirrors is

$$\Delta L = hL = 10^{-21} \times 4000 \text{ m} = 4 \times 10^{-18} \text{ m} \quad (6.34)$$

This is about $\frac{1}{1000}$ the diameter of a **nucleus!**

$$\Delta\phi = 1.4 \times 10^{-8} \text{ rad at the detector} \quad (6.35)$$

LIGO Trick

Detune from $L_1 = L_2$ (the dark spot) by $\delta \approx 10^{-2}$ rad, i.e., $k(L_2 - L_1) = \delta$. Then

$$\frac{I}{I_0} = \sin^2\left(\frac{\Delta\phi + \delta}{2}\right) = \frac{1}{2}[1 - \cos(\Delta\phi + \delta)] \quad (6.36)$$

Expand using $\cos(\delta + \Delta\phi) = \cos\delta \cos\Delta\phi - \sin\delta \sin\Delta\phi$. With $\cos\Delta\phi \approx 1$, $\sin\Delta\phi \approx \Delta\phi$, $\delta \ll 1$:

$$I = \frac{I_0}{2}(1 - \cos\delta) + \frac{I_0}{2}\sin\delta \Delta\phi \quad (6.37)$$

The first term is constant (DC component); the second is the signal.

$$\Delta I \approx \frac{I_0}{2}\delta \Delta\phi = \frac{I_0}{2}\delta \left(\frac{4\pi N hL}{\lambda}\right) \quad (6.38)$$

Now use power: $P_{\text{DC}} \approx P_0 \delta^2/4$, $\Delta P = P_0 \delta \Delta\phi/2$, so

$$\frac{\Delta P}{P_{\text{DC}}} = \frac{2\Delta\phi}{\delta} \quad (6.39)$$

With $P_0 \approx 100\text{--}300$ kW, $P_{\text{DC}} \approx 10\text{--}50$ mW. Plugging in δ , $\Delta\phi$:

$$\Delta P \approx 30\text{--}150 \text{ nW} \quad \text{— this is measurable!} \quad (6.40)$$

Technical Notes

Strictly, LIGO does not use a front-coated mirror. However when a more detailed analysis of a beam splitter is done, we find we pick up the minus sign — i.e., $e^{i\phi_1} - e^{i\phi_2}$, just as though we had a relative phase shift of π at the beam splitter. The cavity mirrors are also a bit more complicated to treat, but in the end we get the relative phase shift we obtained, with some extra prefactors.

6.7 Bragg Diffraction

An X-ray beam incident on a crystal will diffract with the array of atoms as though they are a 3-D aperture. In fact, the X-rays interact with planes of atoms in the crystal. Each unit cell of the crystal acts as a source of (Huygens) wavelets. It is the X-rays scattering from atomic electrons that produce the diffracted beam.

Bragg's Law

Consider a crystal lattice with atom spacing D and a particular set of crystal planes separated by $d = D \sin \theta$ where θ is the angle of incidence measured from the lattice. The scattered angle from the incident direction is $\phi = 2\theta$ (total scatter angle).

Path-length difference between adjacent planes:

$$\Delta = d \cos \theta \quad (6.41)$$

For constructive interference:

$$2\Delta = n\lambda \implies \boxed{2d \cos \theta = n\lambda} \quad (6.42)$$

(Bragg diffraction is usually defined via the angle α measured from the plane: $n\lambda = 2d \sin \alpha$. Here, α is complementary to the lecture's θ .)

But $2d \cos \theta = 2D \sin \theta \cos \theta = D \sin 2\theta$, so

$$\boxed{n\lambda = D \sin \phi, \quad \phi = \text{total scatter angle}} \quad (6.43)$$

Multiple Plane Families

There are many planes that will give Bragg peaks on diffraction. The obvious one (horizontal rows with spacing D) gives $2D \cos \theta = n\lambda$, with $\theta = \phi/2$, so $2D \cos(\phi/2) = n\lambda$. This produces another set of Bragg peaks.

Example: Nickel Crystal

For nickel, $D = 2.15$ Å. For 1.65 Å X-rays incident, the Bragg peak is at $\phi = 50^\circ$.

6.8 De Broglie Waves

De Broglie postulated that to a particle of mass m we should assign a wavelength, the **de Broglie wavelength**, such that

$$\boxed{\lambda_{\text{dB}} = \frac{h}{p}} \quad (6.44)$$

With $p = mv$ and $E = p^2/(2m)$, so $p = \sqrt{2mE}$. Here $h = 6.6 \times 10^{-34}$ J·s is **Planck's constant**.

Davisson–Germer Experiment

Clinton Davisson and Lester Germer were shooting 54 eV electrons at a nickel film which had been inadvertently crystallized.

$$m_e = 9.1 \times 10^{-31} \text{ kg}, \quad E_e = 8.65 \times 10^{-18} \text{ J} \quad (6.45)$$

$$h = 6.6 \times 10^{-34} \text{ J·s} \quad (6.46)$$

$$\lambda_{\text{dB}} = \frac{h}{\sqrt{2m_e E}} = 1.65 \text{ Å} = 1.65 \times 10^{-10} \text{ m} \quad (6.47)$$

Shooting these electrons at the nickel they found a Bragg peak at $50^\circ = \phi$!

This established the wave nature of particles and thus the wave–particle duality. Electrons travel as waves but are detected as particles. For this Davisson won the Nobel Prize.

6.9 Relation of Classical Wave Equation to Quantum Mechanics

Classical Wave

A wave of real amplitude E :

$$E = E_0 e^{i(kx - \omega t)} \quad (\text{trick}) \quad (6.48)$$

But in the end we must take

$$\text{Re } E = E_0 \cos(kx - \omega t) \quad \text{or} \quad \text{Im } E = E_0 \sin(kx - \omega t) \quad (6.49)$$

These are real things with a real, measurable E-field. The wave equation

$$\frac{\partial^2 E}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 E}{\partial t^2} = 0 \quad (6.50)$$

Plugging in $E = E_0 e^{i(kx - \omega t)}$:

$$\left[-k^2 + \frac{\omega^2}{c^2} \right] E_0 e^{i(kx - \omega t)} = 0 \implies \omega = kc \implies \nu \lambda = c \quad (6.51)$$

Quantum Mechanics: The Schrödinger Equation

To the particle there exists a wave function ψ . It obeys a wave equation, the **Schrödinger equation** (for non-relativistic particles). ψ is the wave amplitude. In 1-D (particle moving force-free):

$$\boxed{-\frac{\hbar^2}{2m} \frac{\partial^2 \psi}{\partial x^2} - i\hbar \frac{\partial \psi}{\partial t} = 0, \quad \hbar \equiv \frac{h}{2\pi}} \quad (6.52)$$

Let $\psi = \psi_0 e^{i(kx - \omega t)}$.

Note: $\sin(kx - \omega t)$ and $\cos(kx - \omega t)$ are *not* solutions to this equation. ψ *must* be imaginary (complex) here. (This is fundamentally different from the classical wave equation.)

Plugging in:

$$\left[\frac{\hbar^2 k^2}{2m} - \hbar\omega \right] \psi_0 e^{i(kx - \omega t)} = 0 \quad (6.53)$$

$$\hbar\omega = \frac{\hbar^2 k^2}{2m} \quad (6.54)$$

Identify

$$\boxed{E = \hbar\omega = \text{energy of particle}, \quad p = \hbar k = \text{momentum of particle}} \quad (6.55)$$

Note

$$p = \hbar k = \frac{h}{2\pi} \cdot \frac{2\pi}{\lambda} = \frac{h}{\lambda} \implies \lambda = \frac{h}{p} \quad (6.56)$$

The de Broglie wavelength falls right out of the equation!

Born's Postulate: Probability

De Broglie guessed at the wave-like nature of particles. Everyone asked: what is the wave equation associated with the wavelength? Schrödinger answered.

But we saw a real diffraction pattern from electrons scattering off nickel, and we see it with a 2-slit experiment. But ψ is not real. We saw we get I/I_0 in the classical wave equation by $I/I_0 = |E|^2/|E_0|^2$. We saw this was just a trick because E is real. But if we assume physical reality is in

$$\boxed{|\psi|^2 = \psi^* \psi} \quad (6.57)$$

we have a real number, and so

$$\frac{I}{I_0} = \frac{|\psi|^2}{|\psi_0|^2} \quad (6.58)$$

Our previous analysis of 2-slit interference carries through exactly.

M. Born won the Nobel Prize for postulating reality is in $|\psi|^2$, not ψ .

For the 2-slit interference experiment, electrons over time will build up the pattern

$$\frac{|\psi(\theta)|^2}{|\psi_0|^2} = \cos^2\left(\frac{kd \sin \theta}{2}\right), \quad k = p/\hbar \quad (6.59)$$

But the electrons approach the screen *individually*. The probability that one lands at θ is given above. But **one by one, we cannot predict where it will land**. We have lost the classical determinism of Newtonian physics. We only have probabilistic knowledge of the electron's trajectory after the slit.


We do, however, have a **quantum determinism** in that the Schrödinger equation determines $\psi(x, t)$ for all times, just like $F = ma$ determines particle motion for all time.

Lecture Pages (Unit 14)

Diffraction

We saw Huygen's tells us to treat the wavefront as composed of secondary wavelets.

Sum the resultant E-field at a distant point P taking account the phase shifts.

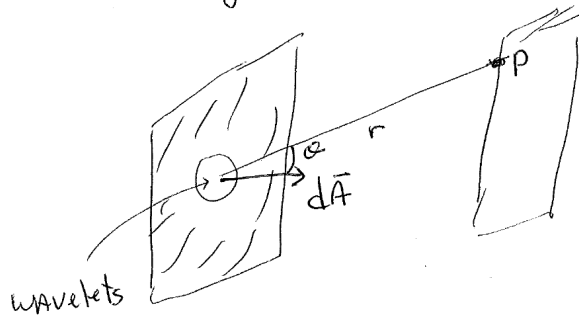

For a slit for source and screen far from the slit we have Fraunhofer diffraction

Single Slit

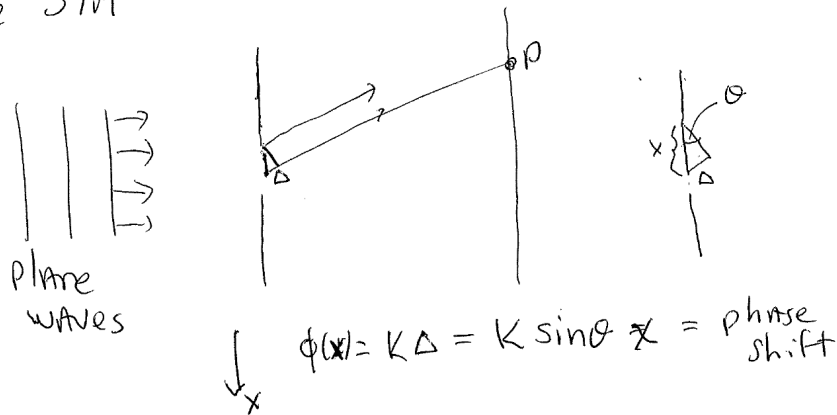


Figure 6.1: *
Unit 14, page 01

Then $E_p = A \int_{-a/2}^{a/2} e^{-ikx \sin \theta} dx$ $A = \text{constant}$

This is just a sum of Huygen's wavelets
The plane wave in the slit is just (for $\phi(x)=0$)

$$E_0 = A \int_{-a/2}^{a/2} dx = Aa$$

$$E_p = A \left(\frac{e^{-iKa \frac{\sin \theta}{2}} - e^{iKa \frac{\sin \theta}{2}}}{-iK \sin \theta} \right)$$

$$= Aa \frac{\sin(Ka \frac{\sin \theta}{2})}{(Ka \frac{\sin \theta}{2})}$$

or $E_p = E_0 \frac{\sin Ka \frac{\sin \theta}{2}}{Ka \frac{\sin \theta}{2}}$

$$\frac{I}{I_0} = \left| \frac{E_p}{E_0} \right|^2 = \left(\frac{\sin Ka \frac{\sin \theta}{2}}{Ka \frac{\sin \theta}{2}} \right)^2$$

This is the single slit diffraction pattern

Where are the minima of $I(\theta)$?

At $Ka \frac{\sin \theta_m}{2} = m\pi$ or

$$m\lambda = a \sin \theta_m \quad m = 1, 2, 3, \dots \text{ minima}$$


Figure 6.2: *
Unit 14, page 02

The 1st maximum is at $\theta = 0$ where

$$\frac{\sin \frac{k a \sin \theta}{2}}{\frac{k a \sin \theta}{2}} \rightarrow 1 \quad \text{as } \theta \rightarrow 0$$

The other maxima are $\frac{1}{2}$ way between the minima or $\frac{k a \sin \theta_m}{2} = (m + \frac{1}{2})\pi \quad m = 1, 2, 3$

$$\text{or } (m + \frac{1}{2})\lambda = a \sin \theta_m \quad \text{maxima (plus } \theta = 0 \text{)}$$

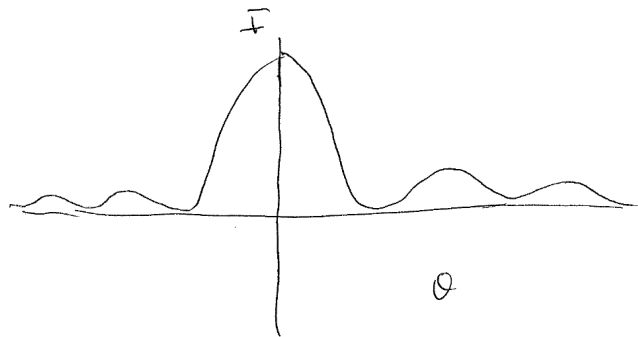

The subsequent maxima have

$$\frac{I(\theta_m)}{I_0} = \frac{1}{(m + \frac{1}{2})^2} \quad \text{so they die out}$$

very quickly.


We can now revisit 2-slit case where we have interference (2-slits) And diffraction (each individual slit)

Figure 6.3: *
Unit 14, page 03

$$\frac{I(\theta)}{I_0} = \left(\frac{\sin \frac{ka \sin \theta}{2}}{\frac{ka \sin \theta}{2}} \right)^2 \cos^2 \frac{kd \sin \theta}{2}$$

d = slit separation

a = slit width

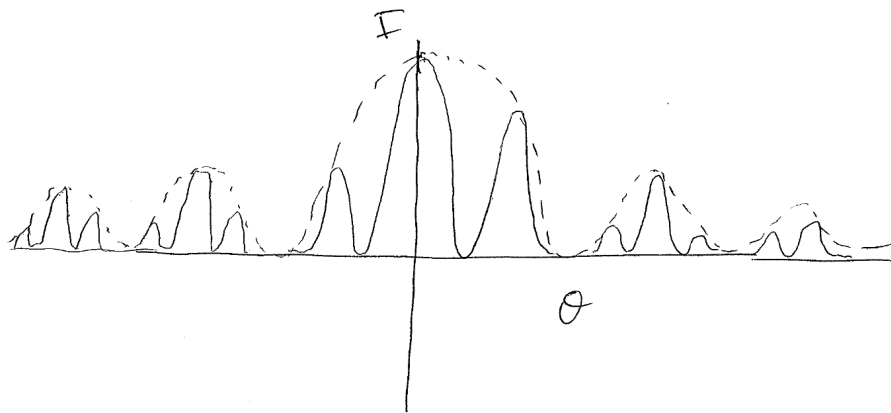

We recognize from our 1-slit integral
 that the diffraction pattern is just
 the Fourier transform of the aperture

Figure 6.4: *
 Unit 14, page 04

Angular resolution for circular aperture
(this can be a mirror or lens)


$$E \propto \iint_{x^2+y^2 \leq R^2} e^{-iK(x\theta_x + y\theta_y)} dx dy$$

$$\sin \theta_x \approx \theta_x ; \sin \theta_y \approx \theta_y ; \theta^2 = \theta_x^2 + \theta_y^2$$

This nasty integral can be done and yields

$$I/I_0 = \left[2 \frac{J_1(KR\theta)}{KR\theta} \right]^2 \quad J_1 = 1^{\text{st}} \text{ order Bessel function}$$


This looks like

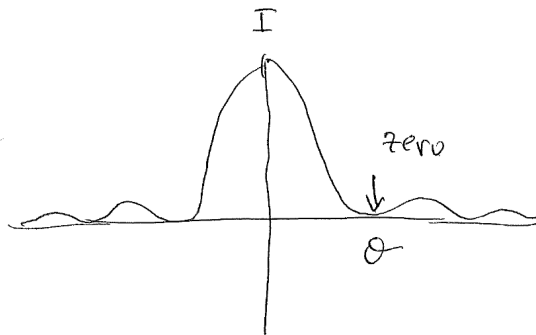

$$\text{The 1}^{\text{st}} \text{ zero is at } \theta_m = \frac{1.22\lambda}{D}$$

$D = 2R = \text{diameter of Aperture}$

Figure 6.5: *
Unit 14, page 05

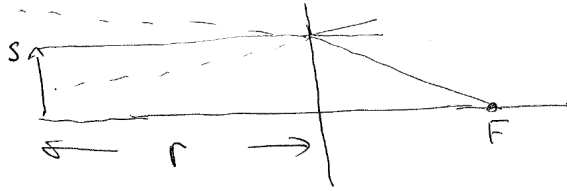

The spot S is blurred to

$$\frac{1.22\lambda}{D} r = \Delta S \text{ by diffraction}$$

Hubble mirror: $2.4 \text{ m} = D$
 (built for spy satellites) $\lambda = 5 \times 10^{-7} \text{ m}$ green light

Low Earth Orbit: $r \approx 400 \text{ km} = 4 \times 10^5 \text{ m}$

$$\Delta S = r \times \frac{1.22\lambda}{D} = 0.1 \text{ m} = 10 \text{ cm. !}$$

In practice there is some blurring due to Atmospheric effects



MQ-9 Reaper: $D \approx 0.3 \text{ m}$
 $r \approx 10 \text{ km} = 33,000 \text{ ft}$
 $\lambda \approx 5 \times 10^{-7} \text{ m}$

$$\Delta S \approx 2 \text{ cm. !}$$

Can operate to $\sim 15,000 \text{ ft}$ $\Delta S \approx 1 \text{ cm}$
 Can recognize people

Figure 6.6: *
 Unit 14, page 06

If 2 sources are within θ_r of each other they are resolvable




resolved

This is the Rayleigh criterion

$$\Rightarrow \frac{1.22 \lambda}{D}$$

Figure 6.7: *
Unit 14, page 07

Michelson Interferometer - LIGO

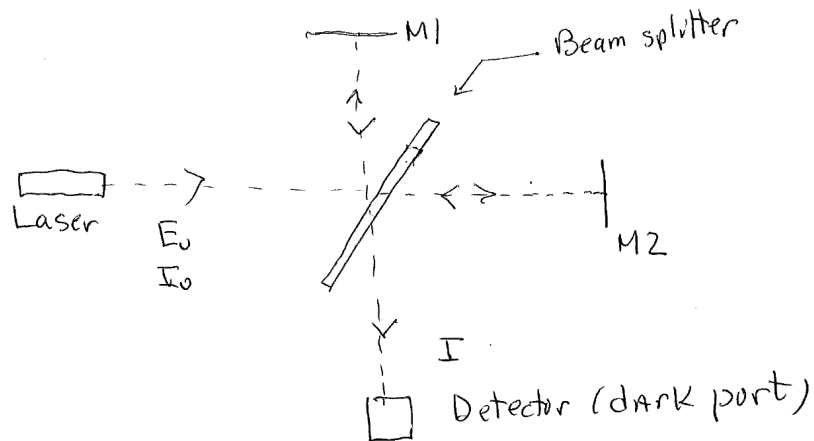

Let r_1 = reflection from beam splitter onto leg $1 \rightarrow M1$
 r_2 = reflection from beam splitter after beam reflects off $M2$
 t = transmission through beam splitter
 ($t_1 = t_2$)

Call E_1' the E-field incident on $M1$
 E_2' the E-field incident on $M2$

Assume $r_{M1} = r_{M2} = 100\%$.

Assume the beam splitter is coated on the front surface with a 50% reflector
 [This is not true but we will get the right phase shift in this simpler treatment]

Figure 6.8: *
 Unit 14, page 08

r_1 ? Since we are going from air to a dielectric
 $1 < n \Rightarrow$ A phase shift of π . Let's
 write it as $e^{-i\pi}$ in our traveling wave
 (imaginary) representation

$$r_1 = e^{-i\pi/\sqrt{2}}; r_2 = 1/\sqrt{2} \quad (n \rightarrow 1 \Rightarrow \text{no phase shift})$$

$$t_1 = t_2 = \frac{1}{\sqrt{2}} \quad \text{ie } 50\% \text{ transmitting so for}$$

$$E_{in}, E_{out} = \frac{1}{\sqrt{2}} E_{in}; I_{out} = \left(\frac{1}{\sqrt{2}} E_{in}\right)^2 K = \frac{1}{2} K E_{in}^2 = \frac{I_{in}}{2}$$

Both beams get a phase shift at reflection from
 $M1/M2$ but the relative shift is ϕ so we
 ignore it. Assume the length of the
 interferometer arms are L_x, L_y and let's
 start with $L_x = L_y$

$E_1 = E$ -field on leg 1 into detector

$E_2 =$ " " " 2 " "

$$E_1 = t_1 r_1 E_0 = \frac{1}{\sqrt{2}} \frac{1}{\sqrt{2}} e^{-i\pi} E_0$$

$$E_2 = r_2 t_2 E_0 = \frac{1}{\sqrt{2}} \frac{1}{\sqrt{2}} E_0$$

$$E_1 + E_2 = \frac{1}{2} E_0 e^{i(Kx - \omega t)} [1 + e^{-i\pi}] = 0$$

There is a dark spot at the detector
 — no light. It all went back to laser!

Figure 6.9: *
 Unit 14, page 09

Put in unequal interferometer legs $L_1 \neq L_2$
 We know how to do this. The phase shift in
 each leg is just $\phi_1 = \frac{2\pi}{\lambda} \times 2 \times L_1$

$$\phi_2 = \frac{2\pi}{\lambda} \times 2 \times L_2$$

The factor of 2 is because the light traversed
 the leg twice beam splitter $\rightarrow M \rightarrow$ beam splitter

So in reality we have, with ϕ_1 and ϕ_2

$$E_1 = \frac{E_0}{2} e^{-i\pi} e^{i\phi_1}; E_2 = \frac{E_0}{2} e^{i\phi_2}$$

$$E_1 + E_2 = \frac{E_0}{2} (e^{i\phi_2} - e^{i\phi_1}) \quad \text{since } e^{-i\pi} = -1$$

$$= \frac{E_0}{2} e^{i(\phi_2 + \phi_1)/2} [e^{i(\phi_2 - \phi_1)/2} - e^{-i(\phi_2 - \phi_1)/2}]$$

$$= i E_0 e^{i(\phi_2 + \phi_1)/2} \sin(\frac{\phi_2 - \phi_1}{2})$$

$$\left[e^{ix} - \frac{e^{-ix}}{2i} = \sin x \right]$$

$$E = E_0 e^{i[(\phi_2 + \phi_1)/2 + \pi/2]} \sin \frac{\Delta\phi}{2}$$


$$e^{i\pi/2} = \cos \pi/2 + i \sin \pi/2 = i$$

$$\Rightarrow \frac{I}{I_0} = \frac{|E|^2}{E_0^2} = \sin^2 \frac{\Delta\phi}{2}$$

$$\Delta\phi = \frac{2\pi}{\lambda} \times 2 \times (L_2 - L_1) = \frac{4\pi}{\lambda} (L_2 - L_1)$$

In reality there are 4 extra mirrors
 in the legs.

Figure 6.10: *
 Unit 14, page 10

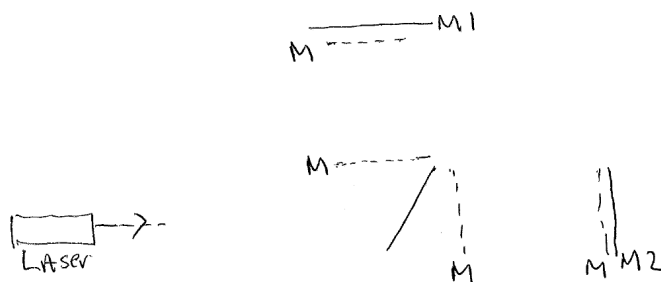

These mirrors are highly reflecting so they trap the light for $N \approx 300$ round trips. This is called a Fabry-Pérot etalon.

So in fact, the phase shift is

$$\Delta\phi = \frac{4\pi}{\lambda} \times N \times (L_2 - L_1) \quad N \approx 300.$$

General Relativity / Gravitational waves

The merger of 2 black holes makes a ripple in the fabric of space-time. This ripple is a gravitational wave and it obeys a wave equation:

$$\frac{\partial^2 h_{\mu\nu}}{\partial x^2} - \frac{\partial^2 h_{\mu\nu}}{c^2 \partial t^2} = 0 \quad \text{Look familiar?}$$

h describes the distortion of our rulers in the presence of the GW.

The GW has the property that when

Figure 6.11: *
Unit 14, page 11

Arriving with the proper orientation (polarization!) to the interferometer, it alters lengths in space-time. The mirrors don't move - the rulers change. The recipe is, for $L_x = L_y = L$ before the wave (we'll get the dark spot).

$$L_x = L + h/2 L = L(1 + h/2)$$

$$L_y = L - h/2 L = L(1 - h/2)$$

$$L_2 - L_1 = L + \frac{h}{2}L - L + \frac{h}{2}L = hL = \Delta L$$

$$\Rightarrow \Delta\phi = \frac{4\pi N h L}{\lambda}$$

$$\text{LIGO: } N \approx 300, \lambda = 1.06 \mu\text{m Nd:YAG laser}$$

$$L = 4 \text{ km}; h = 10^{-21} (!)$$

The relative shift of the mirrors is

$$\Delta L = hL = 10^{-21} \times 4000 \text{ m} = 4 \times 10^{-18} \text{ m}$$

This is about $\frac{1}{1000}$ the diameter of a nucleus!

$$\Delta\phi = 1.4 \times 10^{-8} \text{ rad at the detector}$$

Figure 6.12: *
Unit 14, page 12

LIGO Trick:

Detune from $L_1 = L_2$ (dark spot) by $\delta \approx 10^{-2}$ rad
 ie $K(L_2 - L_1) = \delta$

Then $I/I_0 = \sin^2(\Delta\phi + \delta)$

If you expand the identity

$$\sin^2(\Delta\phi + \delta) = \frac{1}{2}(1 - \cos(\Delta\phi + \delta))$$

$$\Rightarrow \cos(\delta + \Delta\phi) = \cos\delta \cos\Delta\phi - \sin\delta \sin\Delta\phi$$

$$\cos\Delta\phi \approx 1 \quad \sin\Delta\phi \approx \Delta\phi \Rightarrow$$

$$I = \frac{I_0}{2}(1 - \cos\delta) + \frac{I_0}{2}\sin\delta \Delta\phi \quad \delta \ll 1 \Rightarrow$$

$$\Delta I \approx \frac{I_0}{2}\delta \Delta\phi \quad \frac{I_0}{2}(1 - \cos\delta) = \text{constant} = \text{DC component}$$

$$\Delta I = \frac{I_0}{2}\delta \left(\frac{4\pi W h L}{\lambda} \right)$$

Now use

$$P_{DC} \approx P_0 \delta^2/4 ; \quad \Delta P = \frac{P_0}{2} \delta \Delta\phi$$

$$\frac{\Delta P}{P_{DC}} = 2 \Delta\phi / \delta \quad P_0 \approx 100 - 300 \text{ kW}$$

$$P_{DC} \approx 10 - 50 \text{ mW} ; \quad \text{Put in } \delta, \Delta\phi$$

$$\Rightarrow \Delta P \approx 30 - 150 \text{ nW} . \text{ This is measureable!}$$

Figure 6.13: *
 Unit 14, page 13

Technical Notes:

Strictly speaking, LIGO does not use a front-coated mirror. However when a more detailed analysis of a beam splitter is done, we find we pick up the minus sign i.e., $e^{ik_1} - e^{ik_2}$ just as though we had a relative phase shift of π at the beam splitter.

The cavity mirrors also are a bit more complicated to treat, but in the end we get the relative phase shift we obtained, but with some extra pre-factors.


Figure 6.14: *
Unit 14, page 14

Bragg diffraction

An X-ray beam incident on a crystal will diffract with the array of atoms as though they are a 3-d aperture. In fact, the X-rays interact with planes in the crystal. Each unit cell of the crystal acts as a source of (Huygens') wavelets. It is the X-rays scattering from atomic electrons that produce the diffracted beam.

Let us consider a Nickel crystal as an example. There are many ways to slice it into planes. I will choose a less obvious one for illustrative purposes.

Figure 6.15: *
Unit 14, page 15

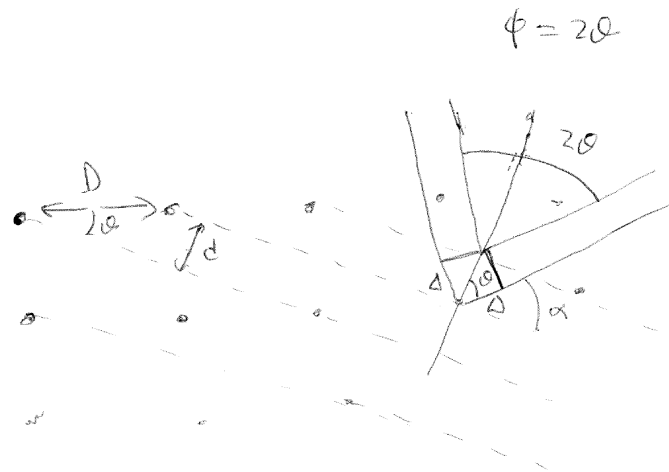

$$d = D \sin \theta$$

$$\Delta = d \cos \theta$$

$$2\Delta = n\lambda \quad \text{constructive interference}$$

$$2d \cos \theta = n\lambda$$


[Bragg diffraction is usually defined via θ]
 Angle α or $n\lambda = 2d \sin \alpha$

$$\text{But } 2d \cos \theta = 2D \sin \theta \cos \theta = D \sin 2\theta$$

$$n\lambda = D \sin \phi \quad \phi = \text{total scatter angle}$$

Figure 6.16: *
 Unit 14, page 16

Note. There are many planes that will give Bragg peaks on diffraction.
The obvious one was

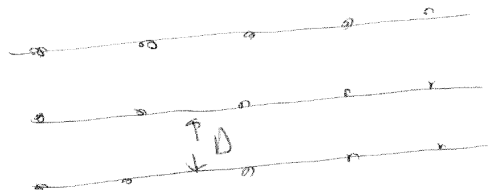

In this case $2D \cos \theta = n\lambda$
 $\theta = \phi/2$ so $2D \cos \phi/2 = n\lambda$
 This will produce another set of Bragg peaks.

Figure 6.17: *
Unit 14, page 17

For nickel $D = 2.15 \text{ \AA}$
For $1.65 \text{ \AA}$ x-rays incident we find
 $\phi = \underline{\underline{50^\circ}}$



De Broglie waves -

De Broglie postulated that to a particle of mass m we should assign a wavelength, the De Broglie wavelength, such that

$$\lambda_{dB} = \frac{h}{p} ; \quad p = mv \Rightarrow \frac{p^2}{2m} = E$$
$$\Rightarrow p = \sqrt{2mE}$$

$$h = 6.6 \times 10^{-34} \text{ J}\cdot\text{s} \equiv \text{Planck's constant}$$

Davissan - Germer Experiment:

Clinton and Lester were shooting 54 eV electrons at a nickel film which had been inadvertently crystallized.

$$m_e = 9.1 \times 10^{-31} \text{ kg} ; E_e = 8.65 \times 10^{-18} \text{ J}$$

$$h = 6.6 \times 10^{-34}$$

$$p = \sqrt{2m_e E} \Rightarrow \lambda_{dB} = \frac{h}{\sqrt{2m_e E}}$$

$$\lambda_{dB} = h/p = 1.65 \text{ \AA} = 1.65 \times 10^{-10} \text{ m}$$

Shooting these electrons at the nickel they found a Bragg peak at $50^\circ = \phi$!

This established the wave nature of particles and thus the wave-particle duality.

electrons travel as waves but are detected as particles.

For this Davisson won the Nobel Prize

Relation of classical wave equation to Quantum Mechanics

Classical: wave of real amplitude E
 $E = E_0 e^{i(kx - \omega t)}$ (Trick) but in reality, in

the end, we must take

$$\text{Re } E = E_0 \cos(kx - \omega t) \text{ or}$$

$$\text{Im } E = E_0 \sin(kx - \omega t)$$

These are real things with a real, measurable
E-field.

$$\frac{\partial^2 E}{\partial x^2} - \frac{1}{c^2} \frac{\partial^2 E}{\partial t^2} = 0 ; E = E_0 e^{i(kx - \omega t)}$$

$$\left[-k^2 + \frac{\omega^2}{c^2} \right] E_0 e^{i(kx - \omega t)} = 0$$

$$\text{we require } \omega = kc ; 2\pi\nu = \frac{2\pi c}{\lambda}$$

$$\Rightarrow \nu \lambda = c$$

Figure 6.20: *
Unit 14, page 20

Quantum Mechanics.

To the particle there exists a wave function

ψ . It obeys a wave equation, the Schrodinger equation (for non-relativistic particles). ψ is the wave amplitude.

in 1-d
$$-\frac{\hbar^2}{2m} \frac{\partial^2 \psi}{\partial x^2} - i\hbar \frac{\partial \psi}{\partial t} = 0 \quad \left(\begin{array}{l} \text{particle} \\ \text{moving free} \\ \text{in 1-d} \end{array} \right)$$

Let $\psi = \psi_0 e^{i(kx - \omega t)}$ $\hbar \equiv \frac{h}{2\pi}$

Note: $\sin(kx - \omega t)$ and $\cos(kx - \omega t)$ are not solutions to this equation. ψ must be imaginary here.

Plugging in:

$$\left[\frac{\hbar^2 k^2}{2m} - \hbar\omega \right] \psi_0 e^{i(kx - \omega t)} = 0$$

$$\Rightarrow \hbar\omega = \frac{\hbar^2 k^2}{2m}$$

Identify $E = \hbar\omega$ = energy of particle

~~$p = \frac{\hbar^2 k^2}{2m}$~~
 $p = \hbar k$ = momentum of particle

Note $p = \hbar k = \frac{h}{2\pi} \times \frac{2\pi}{\lambda} \equiv \frac{h}{\lambda} \Rightarrow$

$\lambda = h/p$ deBroglie wavelength falls out of equation!

Figure 6.21: *
Unit 14, page 21

DeBroglie guessed at the wave-like nature of particles. Everyone asked, but what is the wave equation associated with the wavelength. Schrodinger answered.

But we saw a real diffraction pattern from electrons scattering of nickel and we see it with a 2-slit experiment. But ψ is not real. We saw we get I/I_0 in the classical wave equation by $I/I_0 = \frac{|E|^2}{|E_0|^2}$. We saw

this was just a trick because E is real

But if we assume physical reality is in

$|\psi|^2 = \psi^* \psi$ we have a real number and

so

$$I/I_0 = \frac{|\psi|^2}{|\psi_0|^2}$$

our previous analysis of 2-slit interference carries through exactly!

M. Born won the Nobel prize for postulating reality is in $|\psi|^2$, not ψ .

Figure 6.22: *
Unit 14, page 22

For the 2-slit interference experiment, electrons over time will build up the pattern $\frac{|\psi(\theta)|^2}{|\psi_0|^2} = \cos^2 \frac{Kd \sin \theta}{2}$ where

$K = p/\hbar$. But the electrons approach the screen individually. The probability that it lands at θ is given above. But one by one, we can not predict where it will land. We have lost classical determinism, of Newtonian physics. We only have probabilistic knowledge of the electrons trajectory after the slit.

We do however have a quantum determinism in that the Schrodinger equation determines $\psi(x,t)$ for all times just like $F=ma$ determines particle motion for all time.

Figure 6.23: *
Unit 14, page 23