

FMC adapter for the ADS7057 backplane


Plugs into the ZedBoard FMC LPC connector (J1 in the ZedBoard schematic). Eight SN74LVC8T245 level shifters: A side = VADJ (any of 1.8 / 2.5 / 3.3 V, so no J18 change is needed). B side = 3.3 V from the FMC 3P3V pins.


58 lines: 18 outputs (16 chip selects, 2 SCLK) and 40 inputs (16 WAKE_N, 16 BIG_N, 8 SDO lanes). Outputs have 47 R series resistors for the ribbon. SDO lane inputs have 100 k pull-downs (SDO is Hi-Z while no card is selected).


PRSNT_M2C_L (H2) is grounded and TDI is tied to TDO (D30→D31), as the FMC standard asks a mezzanine without JTAG devices; the ZedBoard adds the FMC to the JTAG chain when it sees PRSNT.











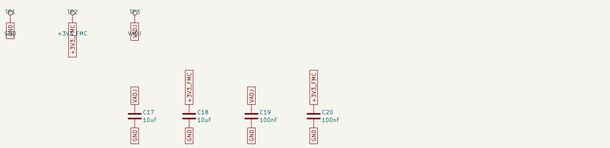








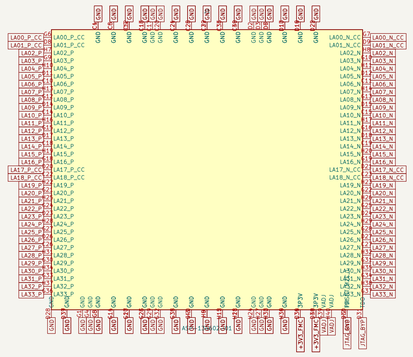





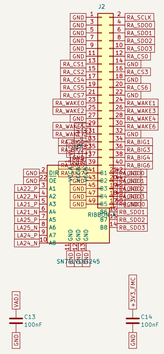

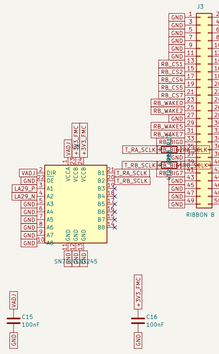

H1 M3

H2 M3

H3 M3

H4 M3

Universidad de los Andes — Ausella

Sheet: /

File: FMC_Adapter.kicad_sch

Title: ZedBoard FMC to backplane adapter (3 V level shifters, two 50-pin rib

Size: A1	Date: 2026-10-12	Rev: A
KiCad E.D.A. 10.0.6		Id: 1/1