

**UL-142 FuelSafe System****SUPPLY & RETURN PACKAGE:****FUEL OIL SUPPLY & RETURN PACKAGE**

1/2", 3/4", or 1"

**Includes:**

- Quad-tap bushing for supply, and return
- Supply line suction stub (*Foot Valve Optional*)
- Anti-syphon valve
- 50% Return Drop Tube
- Full Port Ball Valves with Locking Handles
- Stainless Steel Flex Connectors (*shipped loose*)
- 165°F Fusible Gate Valve (*shipped loose*)

*(1-1/2" & 2" Options available on request)***TANK PACKAGE:****ABOVEGROUND STORAGE TANK**

UL-142 Double Wall Skid Tank, Powder Coat Finish Paint, with Two-Step Bolt-on Stairs (*550 /1100 Only*).

**Tank Package Includes:**Fill Package

- Top Mounted Spill Containment
- Overfill Prevention Valve
- Dust Cap

Venting Package

- Emergency Venting
- Atmospheric Vent with Riser

Mechanical Gauging Package

- At-a-Glance Level Gauge (*As Shown Above*)
- *(Optional)* Clock Gauge (*Not Shown Above*)
- At-a-Glance Leak Gauge
- Watertight Gauge Stick Port w/ Gauge Stick & Laminated Tank Chart

IFC Decal Package



- IFC Compliant Decaling



## Ace FuelSafe Small Fuel Oil Supply & Return Package Specification:

Primary and secondary tank shall be manufactured to UL-142 standards from 10 gauge steel on both the head and shell. Seismic clips are provided for anchoring tank to slab and skids are available for crushed gravel installations. Fork pockets and lifting lugs are provided for tank placement. Tank finish includes epoxy primer undercoat and powder coat finish paint in FuelSafe blue or Ace tank bright white. Custom colors available upon request.

### 300 Gallon Double Wall UL-142 Aboveground Storage Tank

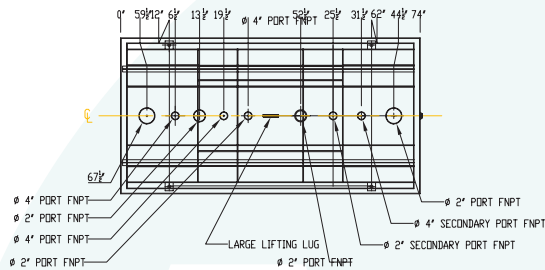

#### Design Specification

Label: UL-142 Double Wall

Built: UL-142

#### Primary Tank

Head Thickness: 10 Ga.

Shell Thickness: 10 Ga.

Maximum Operating Pressure:  
7 kPa



Maximum Operating Vacuum:  
N/A

#### Secondary Tank

Head Thickness: 10 Ga.

Shell Thickness: 10 Ga.

### 550 Gallon Double Wall UL-142 Aboveground Storage Tank

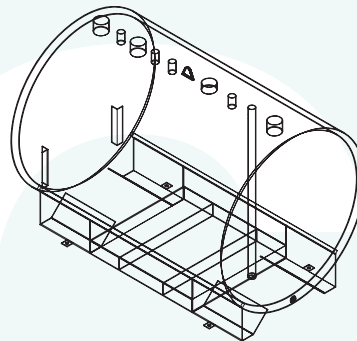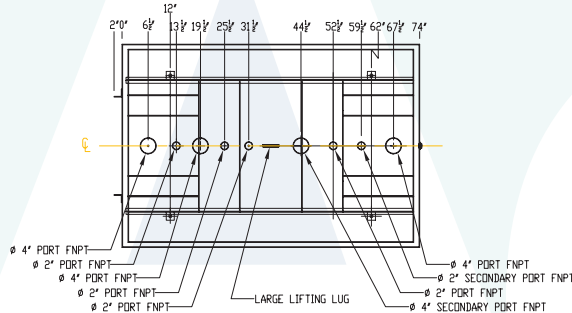

#### 300 Gallon Tank

O.A. Dims 39" dia x 75"L  
1,000 Lb.



#### 550 Gallon Tank

O.A. Dims 51" dia x 75"L  
1,400 Lb.

#### 1,100 Gallon Tank

O.A. Dims 51" dia x 148"L  
2,400 Lb.

### 1,100 Gallon Double Wall UL-142 Aboveground Storage Tank

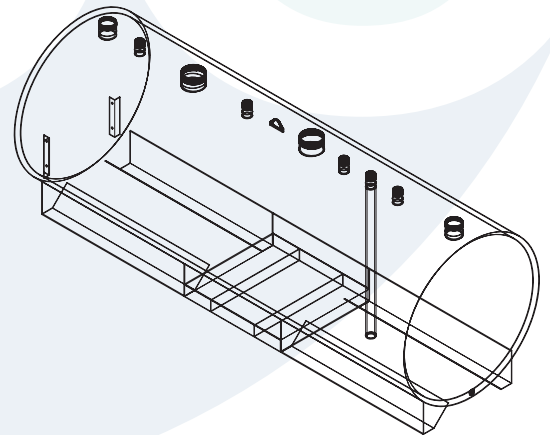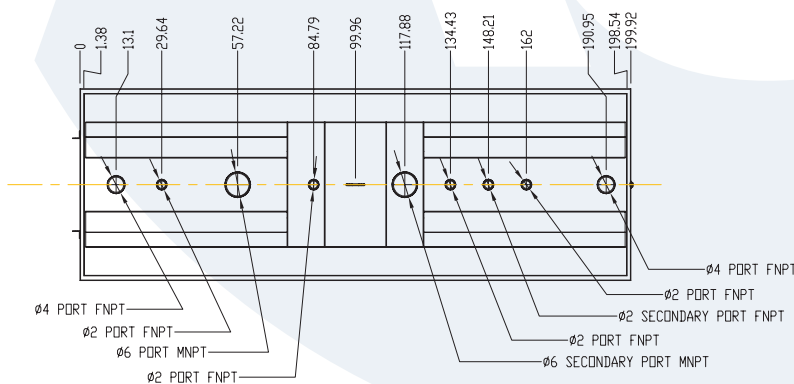

#### Seattle, Washington

18340 Andover Park West  
Tukwila, WA 98168

Tel: (800) 426-2880  
Fax: (888) 475-1418  
E-mail: FuelSafeSystems@acetank.com

#### Alaska

Tel: (907) 562-1143  
Fax: (888) 475-1418  
E-mail: FuelSafeSystems@acetank.com

