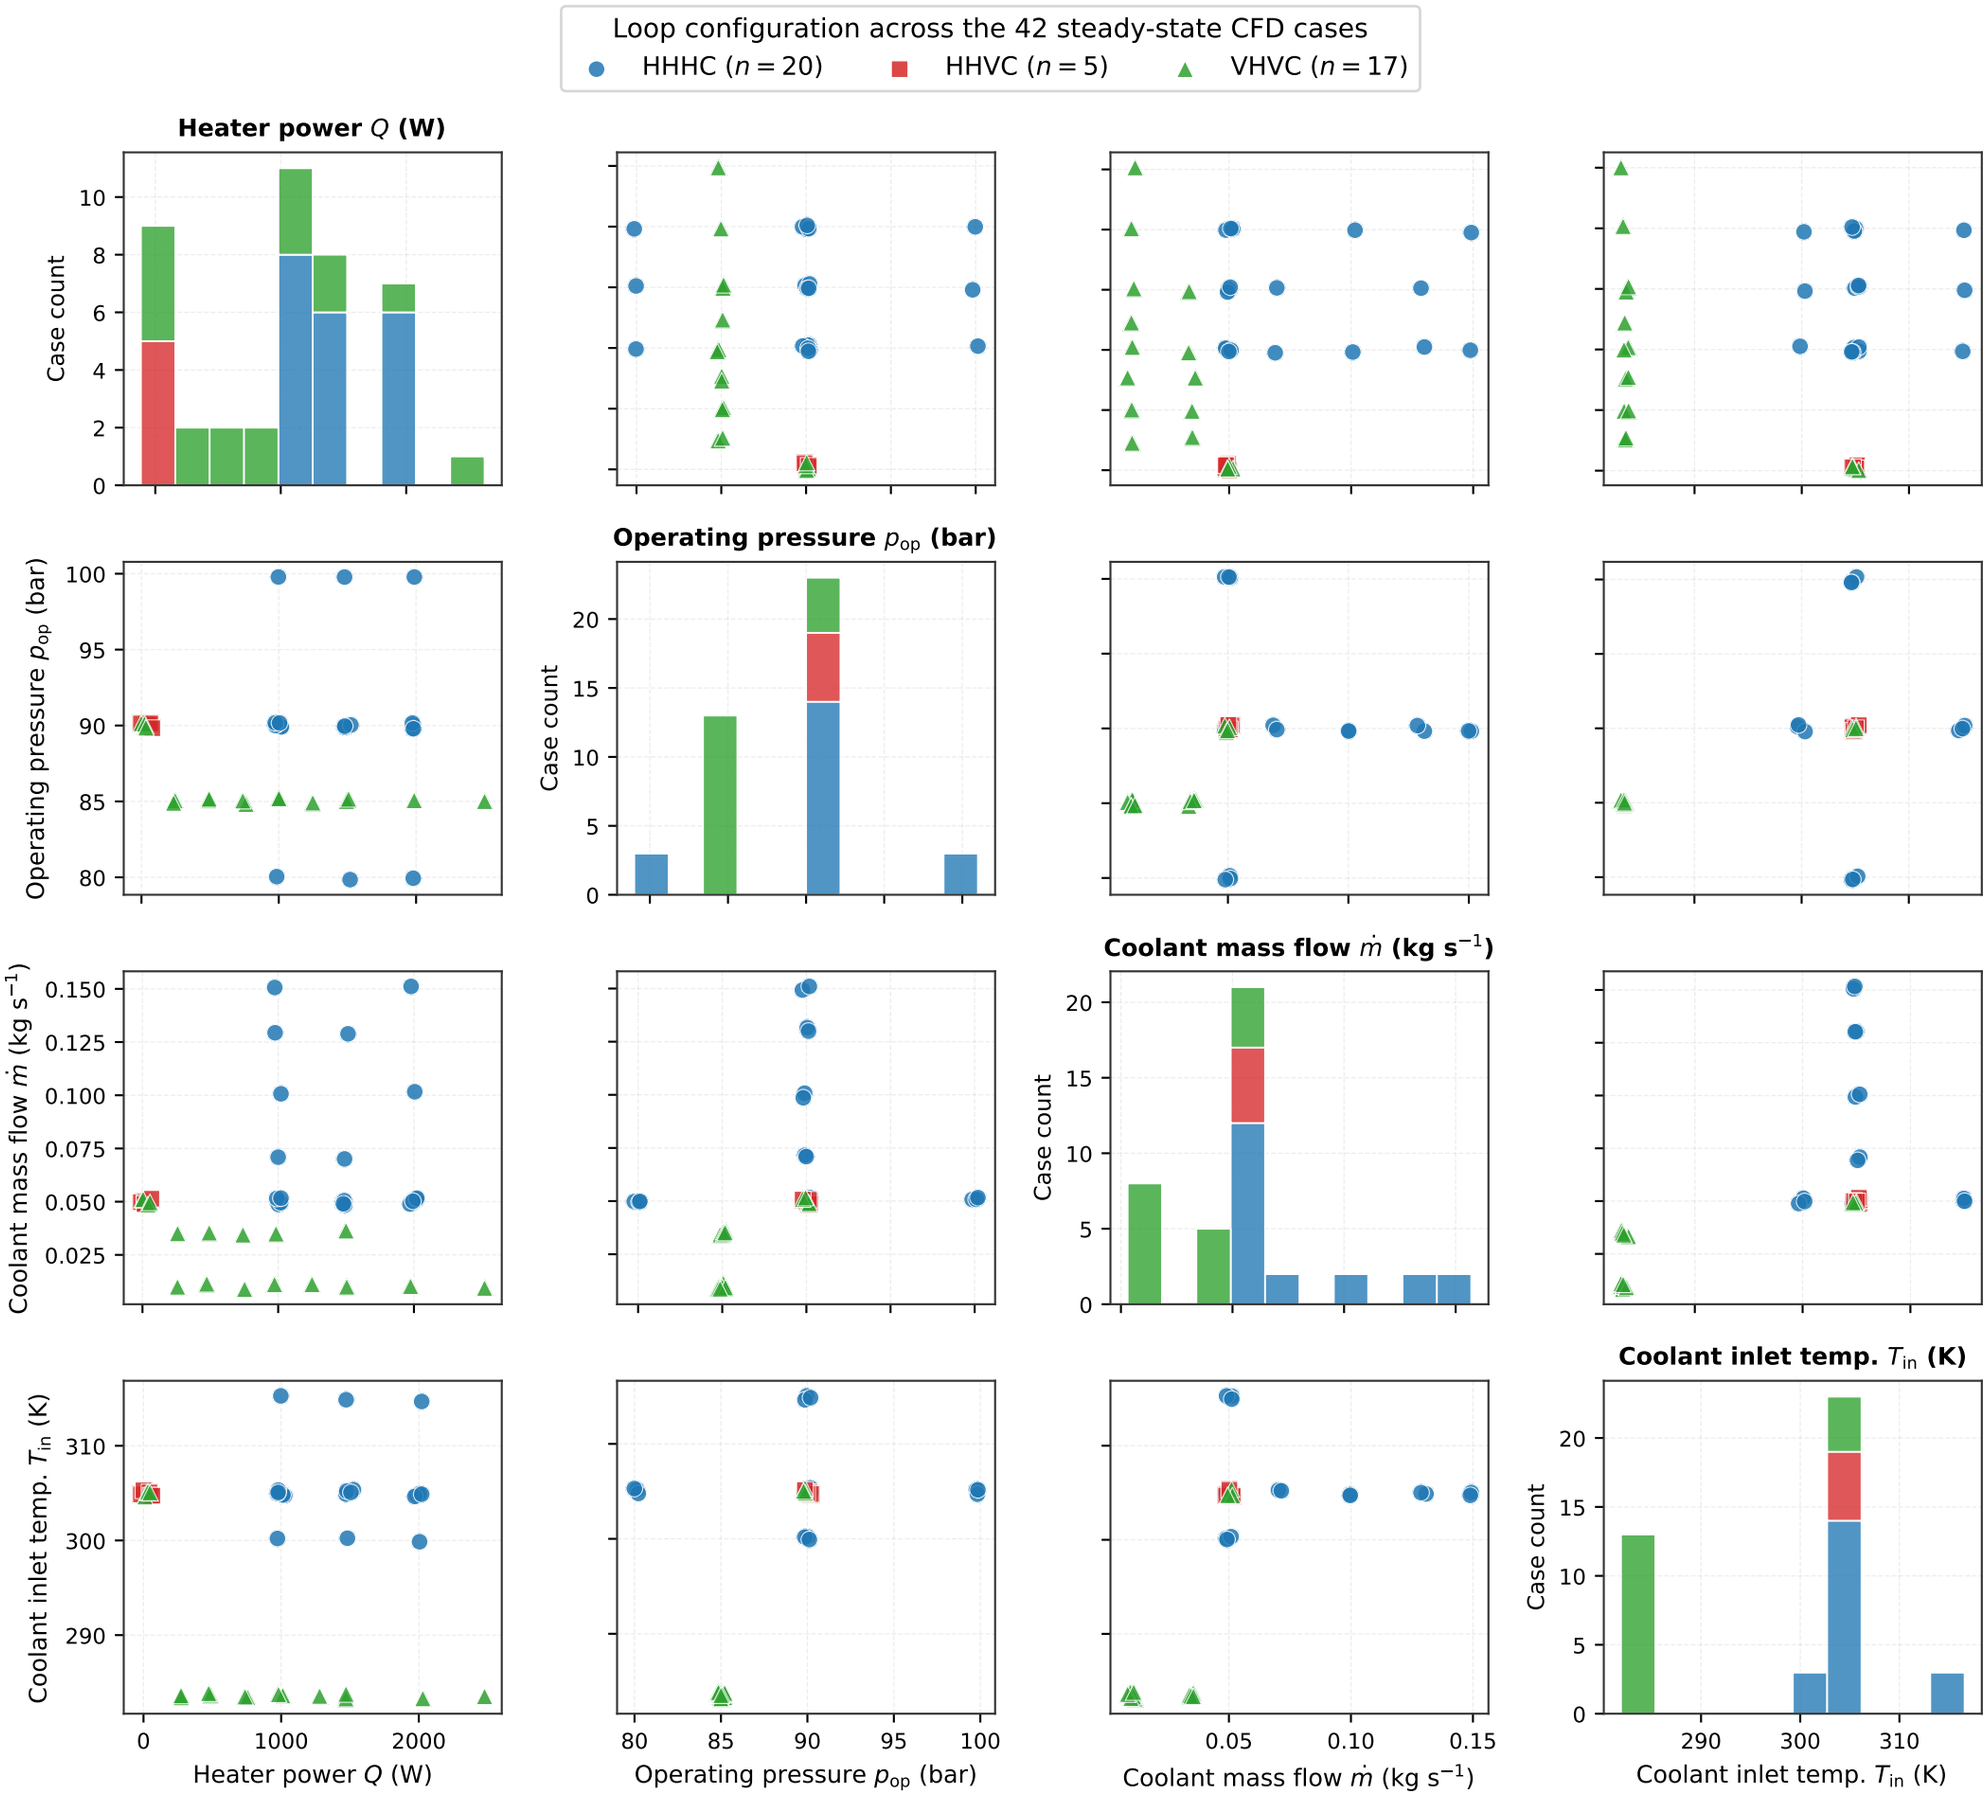
Loop configuration across the 42 steady-state CFD cases
HHHC (n = 20)
HHVC (n = 5)
VHVC (n = 17)
Heater power Q (W)
Operating pressure p_op (bar)
Coolant mass flow ṁ (kg s⁻¹)
Coolant inlet temp. T_in (K)
Case count
Heater power Q (W)
Operating pressure p_op (bar)
Coolant mass flow ṁ (kg s⁻¹)
Coolant inlet temp. T_in (K)