seeed studio

INDUSTRIAL PRODUCT DATASHEET

Round Display for Seeed Studio XIAO

Round Display for Seeed Studio XIAO: a 1.28-inch 240×240 capacitive touch expansion board with RTC, battery charging, TF card slot, and 39 mm circular design for wearable and interactive XIAO projects.

SKU	UPDATED	PRICE
104030087	2026-08-26 10:05:54	$18.00(Excl. VAT)



Overview



The Round Display for Seeed Studio XIAO is a 1.28-inch round capacitive touch expansion board with 240×240 resolution and 65K colors, featuring high compatibility with all XIAO series, onboard RTC, battery charge chip, TF card slot (up to 32GB FAT), JST 1.25 connector, and a 39 mm circular watch-sized plug-and-play design. It is suitable for programmable touch watches, wearable indicators, visible control centers, gaming devices, and interactive displays; note it is currently not directly compatible with the XIAO nRF54L15 series due to lack of Arduino support, though the hardware interface is fully compatible and official software support is under development.

Key Features

Note:

This expansion board is currently not directly compatible with the XIAO nRF54L15 series because Arduino is not supported.

However, the hardware interface is fully compatible, and developers can manually adapt the software if needed.

Official software support from Seeed Studio is under development — stay tuned for updates!

- **Capacitive Touch Screen Expansion Board:** Display with 1.28-inch round, 240×240 resolution, 65K colors, providing clear and colorful images exhibition
- **High Compatibility:** Highly compatible with all XIAO series products, easily integrated into your current projects
- **Rich Peripheral:** Feature onboard RTC, battery charge chip, TF card slot, JST 1.25 connector, all within its compact size
- **Watch-sized Design:** Come with 39 mm circular design, suitable for wearable and space-limited projects
- **Plug and Play**: All pins are led out, no soldering is needed


That is, you can have a reliable timekeeping, a way to extend memory up to 32GB FAT, a charging method by the lithium battery. With its mini size, the XIAO extension board is ideal for wearable and small-volume projects. It is a versatile and powerful extension board that can be used for a wide range of projects, from displaying sensor data to creating interactive interfaces.


Product Gallery









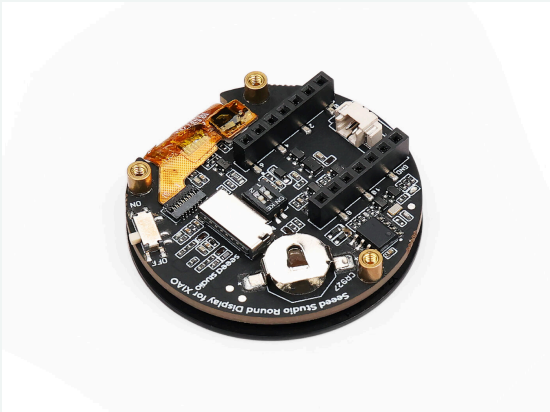

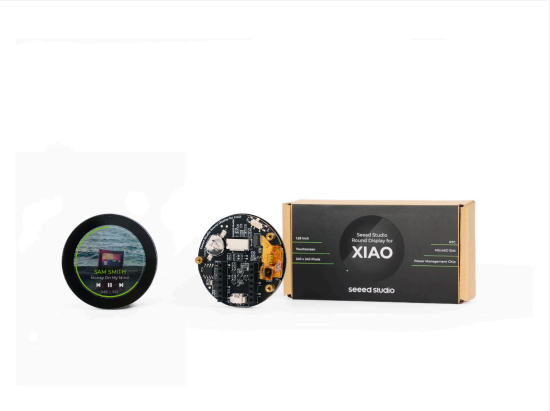

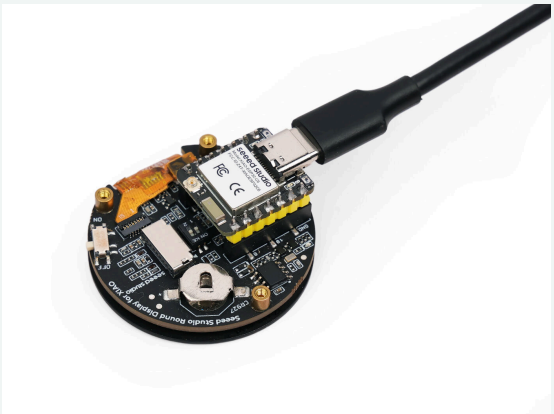


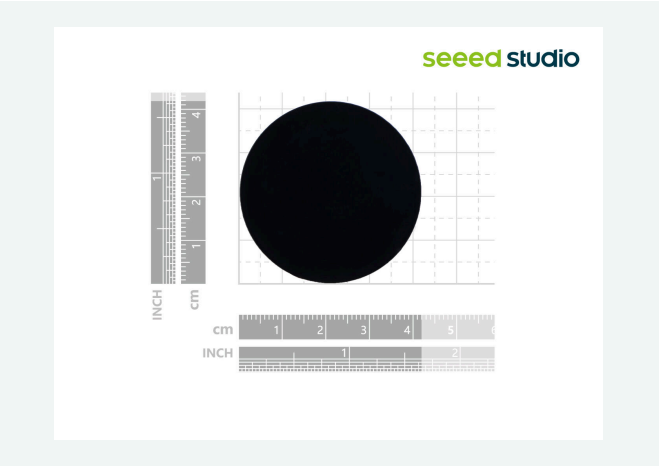

Specification

Item	Detail
Power Supply	USB Type-C: 5V @35 mA Battery Charge: 3.7V @37mA
Battery Connector	3.7V Li-ion Battery JST 1.25 connector
Charge current	~ 485 mA
RTC Battery Holder	CR927
RTC Chip	PCF8563
Expandable memory	TF Card Slot for up to 32GB FAT
Screen	1.28-inch touch screen 240×240 resolution 65K colors
Sample Rate	100Hz
Dimension	43mm x 43mm

Hardware Overview

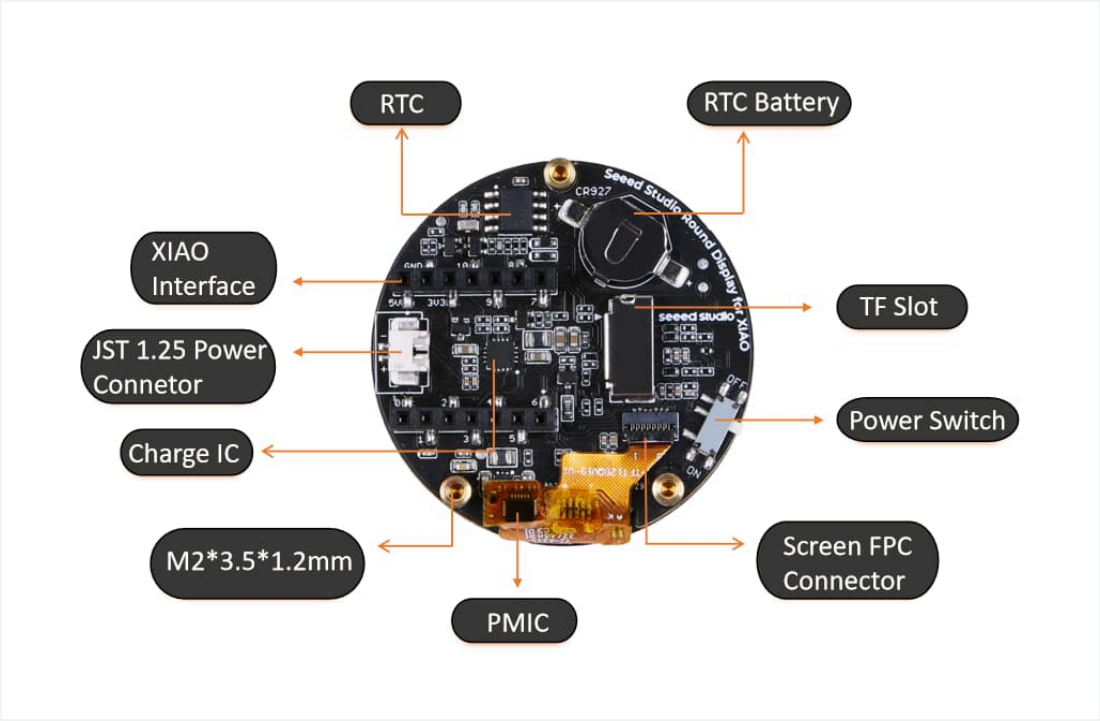

Applications

- **Programmable Touch Watch**
- **Wearable Indicator**
- **Visible Control Center**
- **Gaming Devices**
- **Interactive Displays**

Part List

Seeed Studio Round Display for XIAO	x1

Compliance & Logistics



HSCODE	8543909000
USHSCODE	8543903500
UPC	
EUHSCODE	8543709099
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- https://www.seeedstudio.com/1-28-Round-Touch-Display-for-Seeed-Studio-XIAO-ESP32.html
- Charge IC datasheet
- ETA3410 datasheet
- RTC PCF8563 datasheet
- XIAO Reference Design
- 3D Printing "Case" Studies
- Resource

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com