NANO DELAY | 300 ms TARGET | PROTOTYPE REV C

16 ksample/s / 8-bit PWM; external SPI SRAM. Firmware and bench validation required.

POWER | regulated 9 V adapter; wire the external jack to J1



Fit JP1 for normal 9 V operation. Remove JP1 BEFORE connecting USB. Relay uses 5V_REG.

AUDIO INPUT / TRUE BYPASS | relay off = bypass




BIAS AND OUTPUT | both MCP6002 stages run from filtered 5 V



NANO / EXTERNAL MEMORY | 4,800 sample bytes for 300 ms at 16 ksample/s

CONTROLS | three external B10k pots: 1=CCW/GND, 2=wiper, 3=CW/+5V

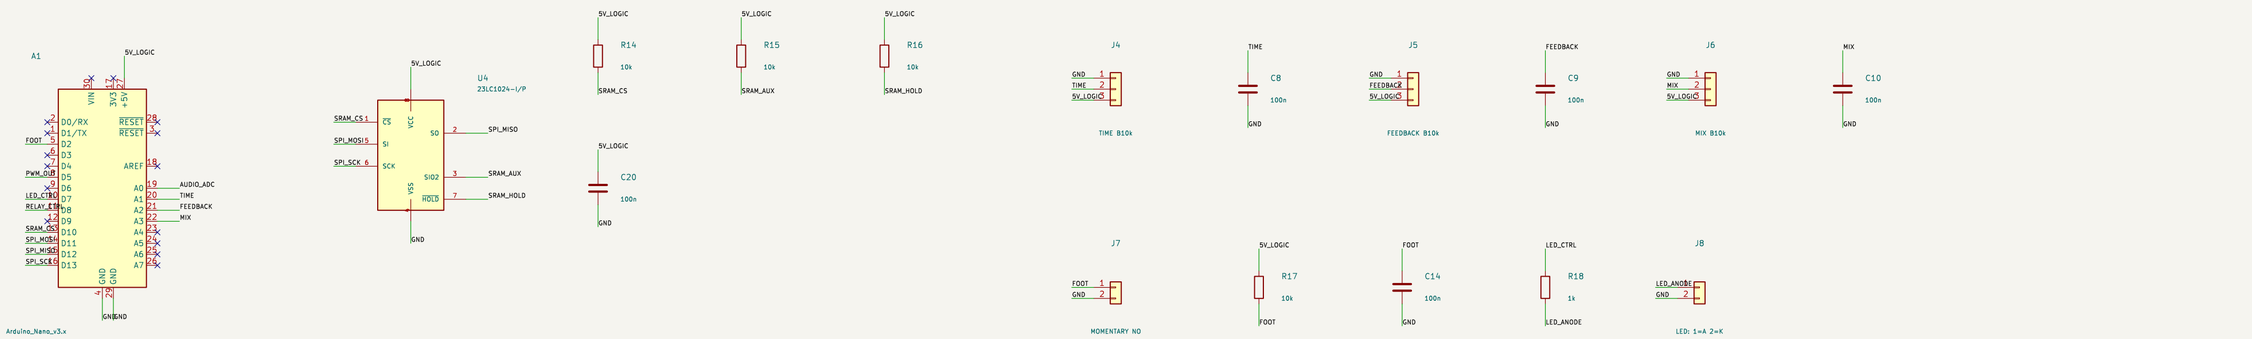

RELAY DRIVER | use the H1 sensitivity version, 5 V coil



Default-off pull-down R9; D2 cathode (band) to +5V_REG. Do not substitute a different relay pinout.

Audio filters are passive two-stage RC ladders (2k2 / 10n), about 2.7 kHz combined −3 dB.

Prototype target: lo-fi mono delay. Timer/PWM/ADC scheduling, mix and feedback are implemented in firmware.

Sheet: /	
File: delay-pedal.kicad_sch	
Title: Arduino Nano delay – 300 ms prototype	
Size: A2	Date: 2026-10-10
KiCad E.D.A. 9.0.8	**Rev: C – UNTESTED**
	Id: 1/1