

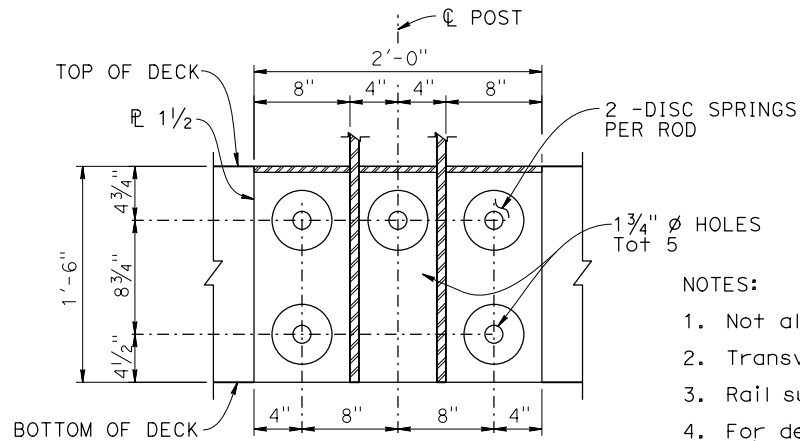
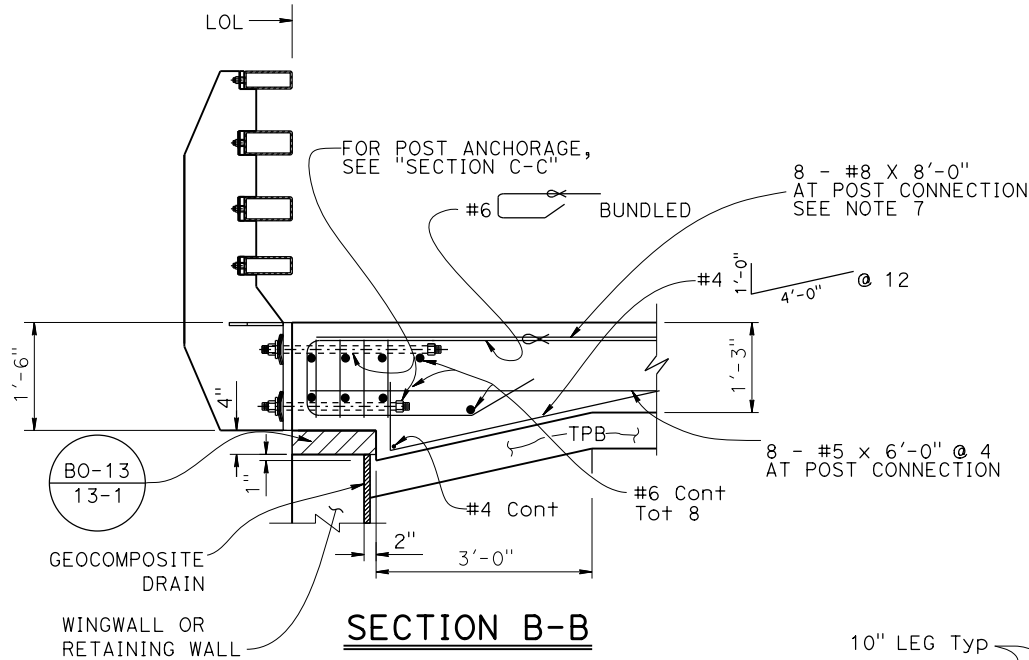
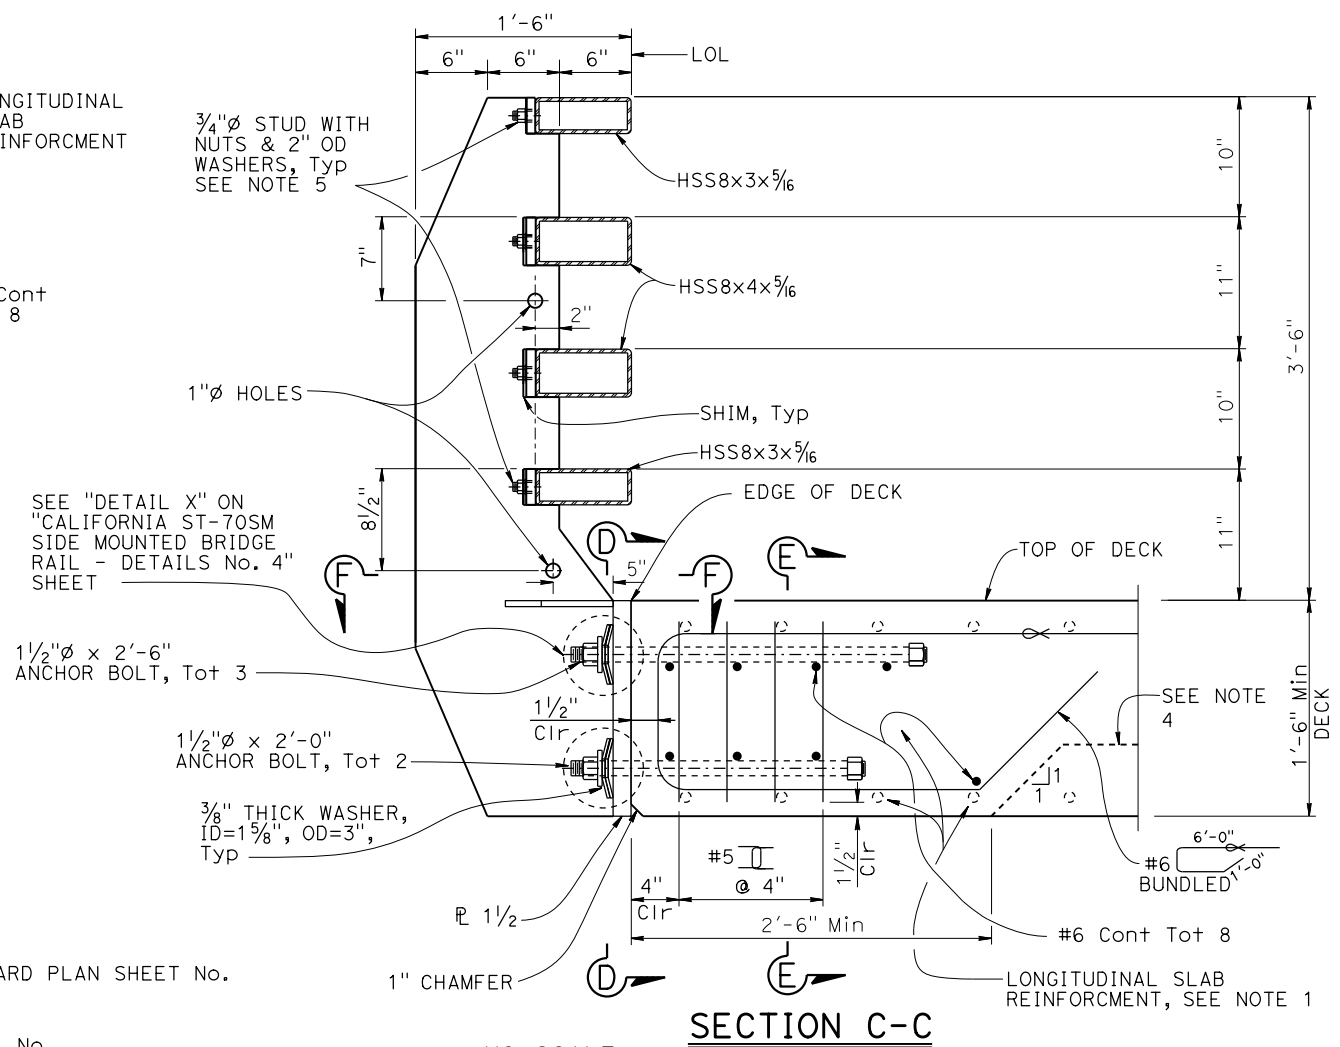
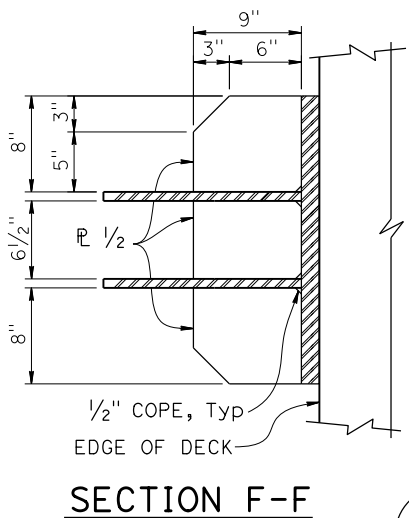
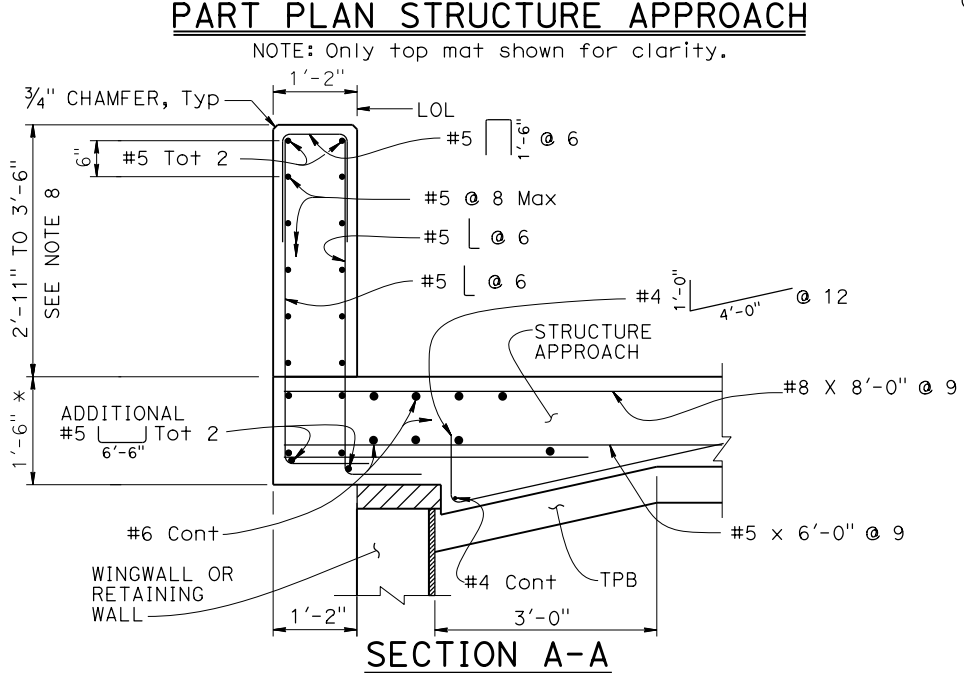


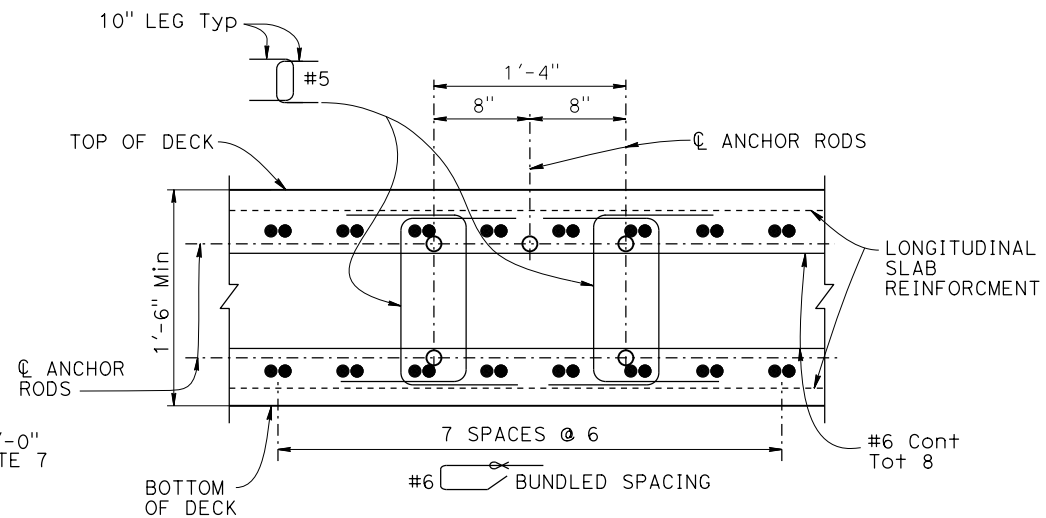

- NOTES:
- Not all deck reinforcement is shown for clarity. See PROJECT PLANS.
 - Transverse deck and approach slab reinforcement to be continuous into anchorage block.
 - Rail surface must have full contact with railing post. Use shim plates as needed.
 - For deck thickness less than 1'-6", bottom transverse deck reinforcement must be adjusted to avoid anchorage block.
 - Bolts with nut and washers to be snug tightened, unless noted otherwise. Thread locking system must be applied at all bolted connections.
 - For approach slab details, see "STANDARDS PLANS". Approach slab reinforcement is not shown for clarity.
 - The #8 rebars shown are only required where disc springs are omitted at end posts next to thrie beam barrier.
 - See "CALIFORNIA ST-70SM SIDE MOUNTED BRIDGE RAIL DETAILS No. 6" for additional approach transition end block reinforcement details.
 - For location of "SECTION A-A", SECTION "B-B" and SECTION C-C", see CALIFORNIA ST-70SM SIDE MOUNTED BRIDGE RAIL DETAILS No. 1" sheet.

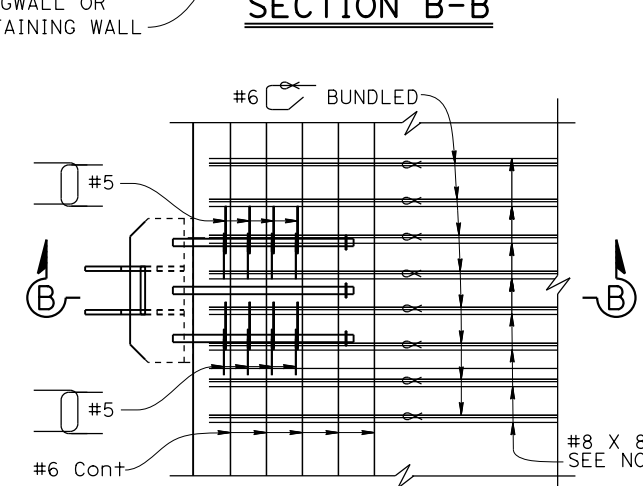

* Although approach slab thickness is greater than Std Plans, use Std Plan reinforcement.