


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS THE PROPERTY OF ALTUM LIMITED AND MAY BE FREELY DISTRIBUTED IN WHOLE. NO RIGHTS ARE RESERVED OR EXPRESS OR IMPLIED WARRANTY GIVEN.


Wiz ESC

-Custom sensorless electronic speed controller
-Nominally takes a 3S battery but can take up to a 4S


STM32G4 MCU

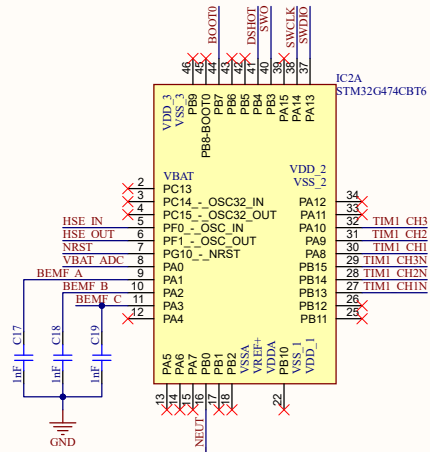


VBAT to 3V3 and protection

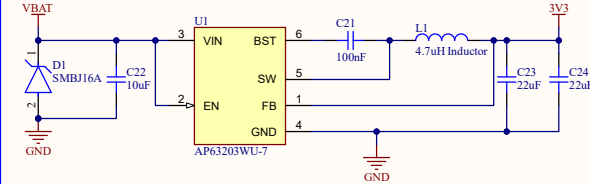


Gate Driver and circuitry

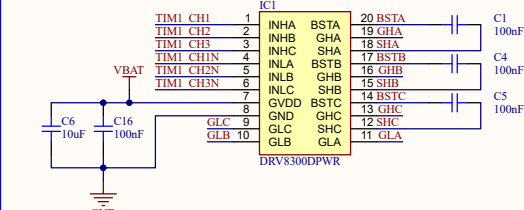


Mosfets and phase outputs

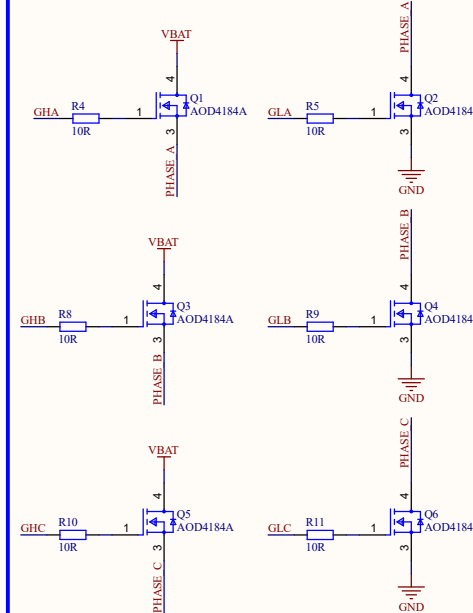

STM decoupling and analog

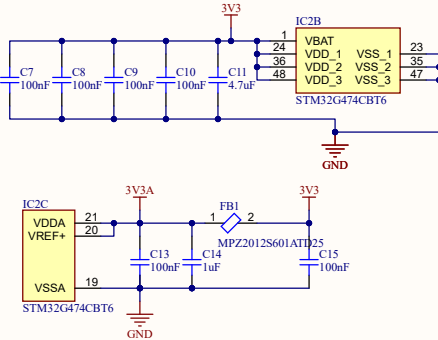


Voltage sensing for VBAT, back emf and neutral point

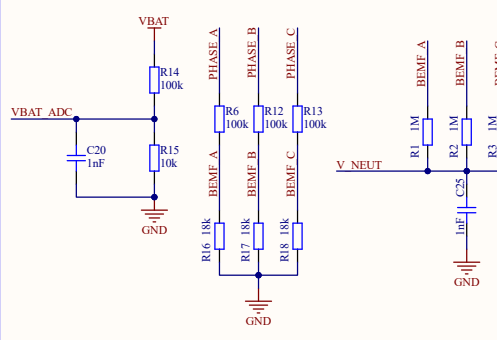


Notes:

- Values for resistors and capacitors have largely been chosen based on datasheet recommendations.
- Except for C_GVDD, C_BSTx and R_GHx/GLx on the gate driver/mosfet gates.
- Voltage divider resistances have been decided on to ensure no damage is done to the MCU ADC pins and also allow for relatively accurate readings.
- Other values not mentioned in any datasheets, e.g. 1nF decoupling on the ADC lines has been chosen out of respect for the nature of their purpose.
- Generally parts chosen for simplicity, good documentation and overall fitting the needs.

8MHz Crystal for STM



Boot, Reset and SWD for STM

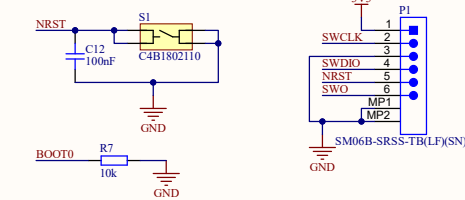

APPROVALS	DATE	PROJECT
ENG: Barney		
DSN: Barney		
CHK: Barney		
REFERENCE DOCUMENTS	TITLE	PROJECT REVISION
BOM:	Wiz ESC	77d20458e18dec1832707a207a28618de
ASSY DWG:		
FAB DWG:		
PCB DWG:		
SCALE:	FILE NAME	SHEET
	ESC_Main.SchDoc	1 OF 1