ARMSTRONG / PRODUCT CATALOGUE

# YEW-3000E

## Computer Controlled Compression Testing Machine

YEW-3000E 3000kN Computer Controlled Compression Testing Machine





## Product description

The machine can realize electro-hydraulic loading, sensor force measurement, digital display force value. The force value data can be printed, and conversion of compression strength can also be realized. This type of machine conforms to the national standard "standard for mechanical properties of ordinary concrete test method", automatic computer controlled loading speed, and with load speed indicator device, peak maintenance, overload protection function, is the construction, building materials, highway and bridge engineering units necessary test testing equipment.

## Technical specifications

| | |
|---|---|
| Capacity | 3,000 kN |
| Control | Computer controlled |
| Machine type | Compression testing machine |
| Load capacity (source kgf value) | 300000 kgf |
| Calibration standard | Class 1 |
| Testing load accuracy | +/-1% |
| Load measuring range | 2%-100% F.S. |
| Minimum resolution (source value) | 0.01 N |
| Maximum plate distance | 300 mm |
| Pressure plate | 260 x 260 mm |
| Piston diameter / maximum stroke | 310 mm / 50 mm |
| Control cabinet dimensions | 600 x 755 x 1310 mm |
| Load frame dimensions | 620 x 720 x 1600 mm |
| Power supply | 3-phase 380 V +/-10%, 50-60 Hz |
| Net weight | 1000 kg |
| Operating temperature | 0 to +38 degrees C (+32 to +100 degrees F) |
| Humidity | 10%-90%, non-condensing |

Extra wide and/or extra height frames are available. The power supply system is customisable.

The source lists both 3000 kN and 300000 kgf, and a minimum resolution of 0.01 N. Confirm these numerical values for the supplied configuration before ordering.

## Machine Accessories

| | | | |
|---|---|---|---|
| | 1.Load Frame | | |
| 1.1 | Host Frame | 3000kN, High intensity testing machine structure, high stiffness to assure accuracy. | 1 set |
| 1.2 | Compression Fixture | 260*260mm | 1 set |
| 1.3 | Safety Screening | Independent research and development | 1 set |
| | 2.Servo Oil Power System | | |
| 2.1 | Control Cabinet | Max. Pressure:30MPa<br>Max. Flow:3.6L/min<br>Power:1.5KW | 1 set |
| 2.2 | Hydraulic Integrated Valve Block | 10μm, Includes precision oil filter | 1 set |

## Accessory reference images


Host Frame


Compression Fixture


Safety Screening


Control Cabinet


Hydraulic Integrated Valve Block


| | | | |
|---|---|---|---|
| 2.3 | High-Pressure Oil Pipe | The max. pressure it can safely withstand is 25MPa | 1 set |
| 2.4 | Magnetic Exchange Valve | Pressure 20Mpa | 1 set |
| | 3.Measurement and Control Part | | |
| 3.1 | Measure and Control Software | Standard English, Can optional English,Russia,Chinese etc | 1 set |
| 3.2 | Control System | 3 closed loop (force, deformation, displacement) control system | 1 set |
| 3.3 | Load Cell | Max. Load Capacity :3000kN | 1 set |
| 3.5 | Computer | HP | 1 set |
| 3.6 | Printer | HP | 1 set |
| 4.Other | | | |

| | | |
|---|---|---|
| | Instruction Manual, Packing List, Certificate | 1 set /each |

## Accessory reference images


High-Pressure Oil Pipe


Magnetic Exchange Valve

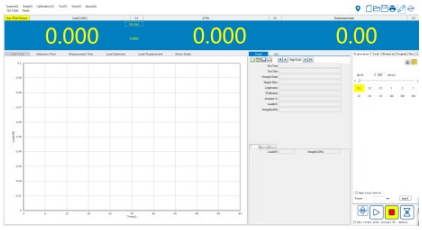

Measure and Control Software


Control System


Load Cell


Computer


Printer

## Configuration notes

Technical values, standards references, software functions and accessory information are reproduced from the supplied product catalogue. Confirm the applicable standards, current numerical values and supplied configuration with the quotation.