


REDMI NOTE 10S LIGHT

DIGITAL BOARD ESQUEMAS DIGITALIZADOS

TOP

BOTTOM

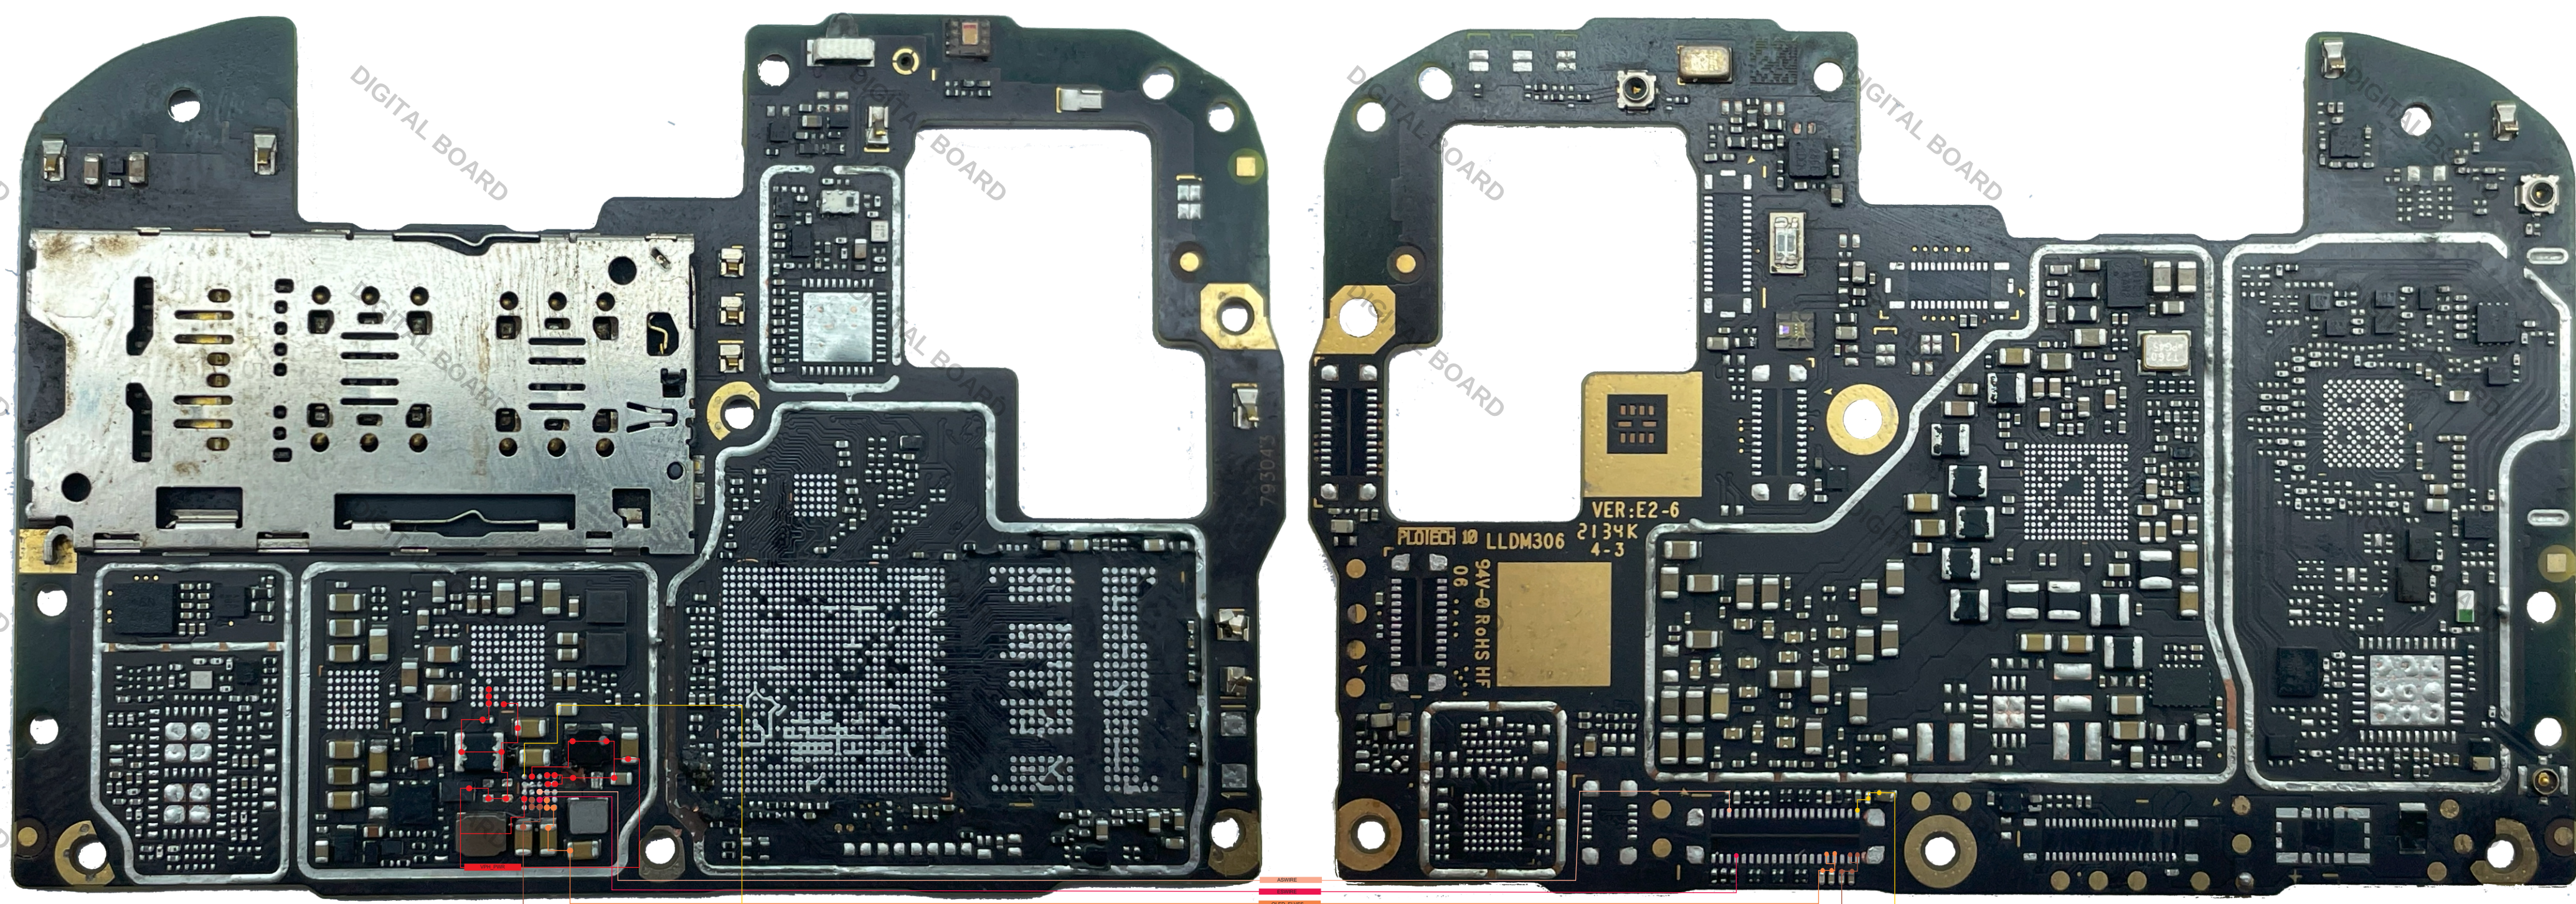

1- NEW DISPLAY LGAKR OR DISPLAY CONNECTOR KO ACHE SE CHECK KR LE TUTA , FUTA YA WATER DAMMAGE NAHI HONA CHAHIYE

2 - HARDWARE SOLUTION ME DEKHKAR SABHI LINE KA GR CHECK KRE (GR CHECK KRNE KE LIYE - BATTERY NIKAL METTER KO DIODE MODE PR LGAKR RED WIRE KO GND OR BLACK SE LINE CHECK KRE)

HARDWARE SOLUTION ME BTAYE ANUSAR SABHI LINES KA GR MILNA CHAHIYE AGAR GR ME KAHİ SHORTING YA LINE OPEN MILE TO US LINE KO CHECK KRE

3- HARDWARE SOLUTION ME DEKHKAR SABHI LINES KA VOLTAGE CHECK KRE

(VOLTAGE CHECK KE LIYE - PHON KO CHALU KRKE METTER KO VOLTAGE MODE KRKE BLACK WIRE KO GND OR RED SE LINE CHECK KRE)

LEKIN AMOLED DISPLAY ME YE VOLTAGE DISPLAY LAGNE KE BAD HI DIKHAYEGA ISLIE DISPLAY LGAKAR HI CHECK KRE

OR JIS LINE ME VOLT NA BNE YA TO FIR VO VOLTAGE JIS IC SE BNTA HAI US IC KO CHANGE KRE OR SATH HI US IC KI REQUIREMENT CHECK BHI CHECK KRE

AMOLED DISPLAY ME LIGHT KI LINES ME AGAR PROBLEM HO TO BHI GRAPHIC NHI AATA HAI TO... LCD LIGHT KI LINES KO BHI CHECK KRE...

1- SABHI LINE KA GR CHECK KRE

(GR CHECK KRNE KE LIYE - BATTERY NIKAL METTER KO DIODE MODE PR LGAKR RED WIRE KO GND OR BLACK SE LINE CHECK KRE)

GR ME KAHİ SHORTING YA LINE OPEN MILE TO US LINE KO CHECK KRE

2 - HARDWARE SOLUTION ME DEKHKAR SABHI PINS PR VOLTAGE CHECK KRE OR VOLTAGE DISPLAY LGAKR HI CHECK KRE (VOLTAGE CHECK KE LIYE - PHON KO CHALU KRKE METTER KO VOLTAGE MODE KRKE BLACK WIRE KO GND OR RED SE LINE CHECK KRE)

ASWIRE

ESWIRE

OLED_ELVS

OLED_ELVD

OLED_AVDD

WHATSAPP/TELEGRAM +91 (33) 98444-4376