


TOP

BOTTOM

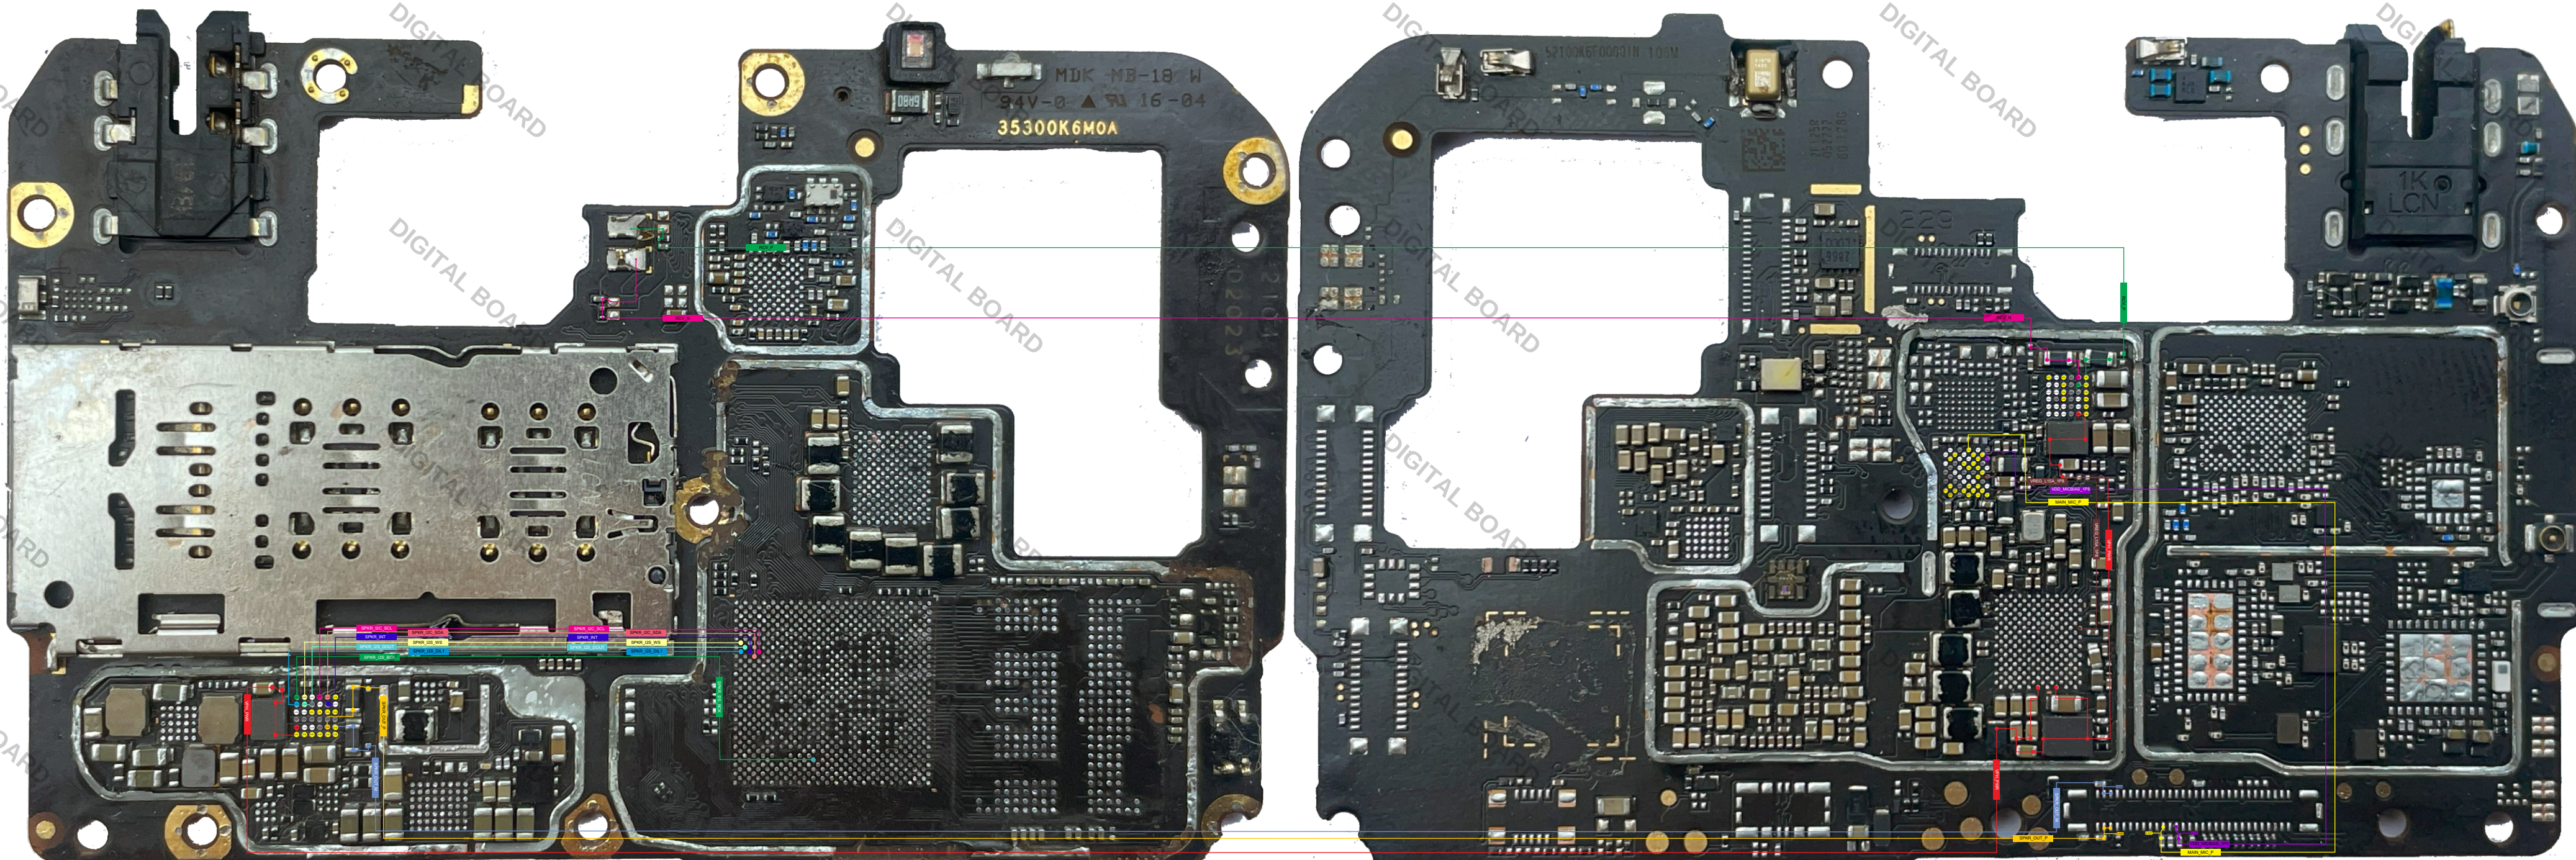

MIC KAM NHI KR RHA

1 - CHARGING PCB (PLATE) OR FLUX (पत्ता) CHANGE KRKE CHECK KRE

✓2 - HARDWARE SOLUTION ME DEKHKR MIC KI LINES KA GR CHECK KRE (GR CHECK KRNE KE LIYE METER KI RED WIRE KO GND KRE OR BLACK KO LINE S JODE)

KUCH MOBILE (SAMSUNG) ME SIRF VOLTAGE LINE ME GR MILTA DUSRI ME NAHI TO USKE LIYE STEP NO. 3 CHECK KRE

OR METER KO VOLTAGE MODE PR LGAKR (BLACK WIRE GND OR RED SE LINE CHECK) MIC_BIOS LINE ME 2.8 VOLT CHECK KRE

✓3 GR OK MILE TO PHON ME SIM LGAKR ON KRE OR CALL KRKE MIC KO DONO LINES KO CHIMTI SE TOUCH KRE TO 2ND MOBILE (JISME PHON LGAYA HAI) ME SARRR SARRR KI AAWAJ AAYGI AGAR AAWAJ AAYE TO YAHA TAK LINES OHK HAI

OR NHI MILE TO VOLTAGE KE 2.8 CHECK KRE VO OK MILE TO SIGNAL WALI LINE KO CHECK KRE JIS IC LINE ME JAA RAHI USE CHANGE KRKE OR US IC KI REQUIRMENT CHECK KRE....

SPEAKER KAM NHI KAR RHA

1- CHARGING PCB (PLATE) , FLUX (पत्ता) OR RINGER MODULE (SPEAKER DIBBI) CHANGE KRKE CHECK KRE

2 - SPEAKER LINES KA GR CHECK KRE HARWARE SOLUTION ME DEKHKAR (GR CHECK KRNE KE LIYE - BATTERY NIKAL METTER KO DIODE MODE PR LGAKR RED WIRE KO GND OR BLACK SE LINE CHECK KRE ESE COOL TESTING KHTE HAI)

3 - HARDWARE SOLUTION ME DEKHKAR VOLT CHECK KRE (VOLTAGE CHECK KE LIYE - PHON KO CHALU KRKE METTER KO VOLTAGE MODE KRKE BLACK WIRE KO GND OR RED SE LINE CHECK KRE)

4 - AGAR GR OR VOLT OK MILE TO AUDIO IC KO CHANGE KRE OR AUDIO IC KI REQUIRMENT (जरूरतें) CHECK KRE