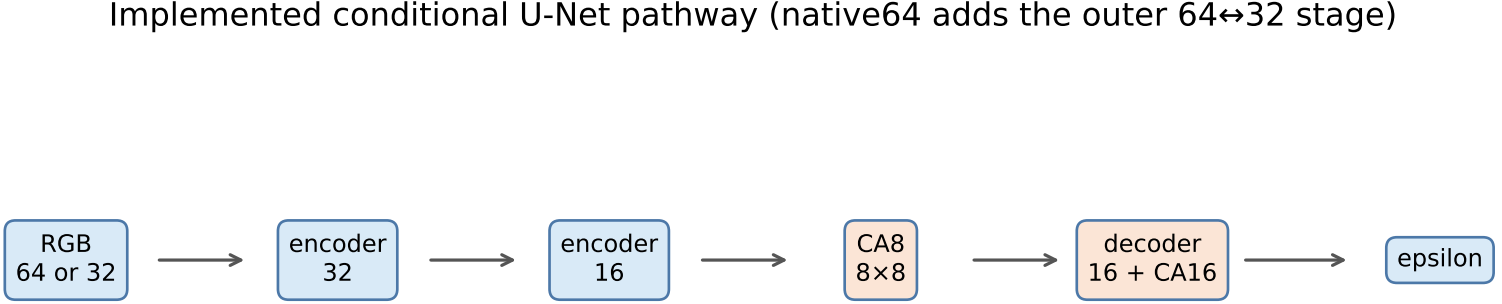
Implemented conditional U-Net pathway (native64 adds the outer 64↔32 stage)
RGB
64 or 32
encoder
32
encoder
16
CA8
8×8
decoder
16 + CA16
epsilon
sinusoidal timestep → MLP → every residual block
skip concatenations connect matching encoder and decoder levels