
BIG MODULAR AUDIO OUT — S3 schematic (+/−12 V, pure analog). Circuit intent: docs/research.md


POWER: Eurorack +/−12V -> B5819W series diodes -> +12V / −12V rails. +5 V not used.

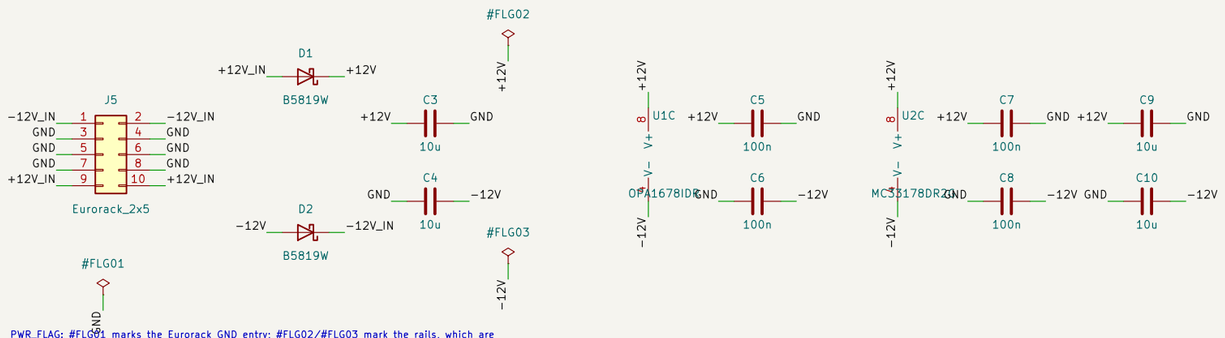

PWR_FLAG: #FLG01 marks the Eurorack GND entry; #FLG02/#FLG03 mark the rails, which are fed from the header only through the series diodes D1/D2 that ERC cannot see through.

CHANNELS (L top, R bottom): TS in -> 1k -> 1u -> T node -> 47k/56k (x0.544) -> OPA1678 follower = BUF
BUF -> 100R -> LINE out. BUF -> 50k pot (15k taper load) -> MC33178 follower -> 10R -> PHONES.
Line level: 10 Vpp (+/−5 V Eurorack full scale) -> 1.92 Vrms, under the 2 Vrms consumer full scale.

OUTPUTS (TRS): line out T = L, R = R, S = GND; phones T = L, R = R, S = GND

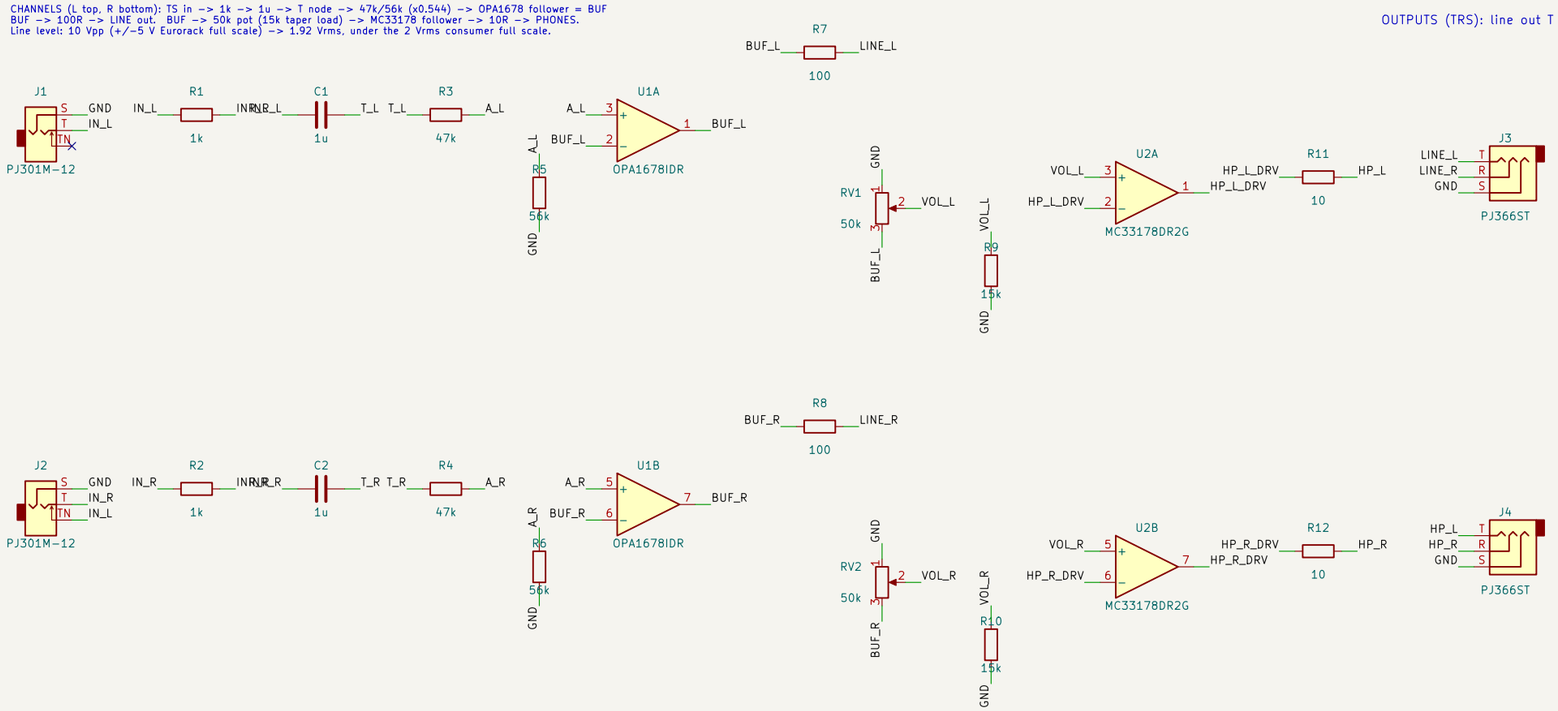

NORMALLING: J2 (IN R) switch contact TN is wired to IN_L. With no plug in IN R, the L input feeds the R channel too (mono L on both sides). A plug in IN R opens the switch: stereo. No jumper.

Circuit intent: docs/research.md; placement: docs/geometry.json
SCHEMATIC S3 — +/−12 V analog — not released, not for fabrication

Big Modular

Sheet: /
File: audio-out.kicad_sch

Title: Big Modular — Audio Out

Size: A3	Date:	**Rev: S3**
KiCad E.D.A. 10.0.6		Id: 1/1